


GENERAL NOTES

- 1. The marker shall be cast in place of Class SI Concrete.
- 2. Tie marker shall be installed after the final seeding has been completed unless otherwise specified by the Engineer.


TYPICAL APPLICATION


3. The tie distances to the section corner shall be measured and recorded by the IDOT Chief of Surveys.

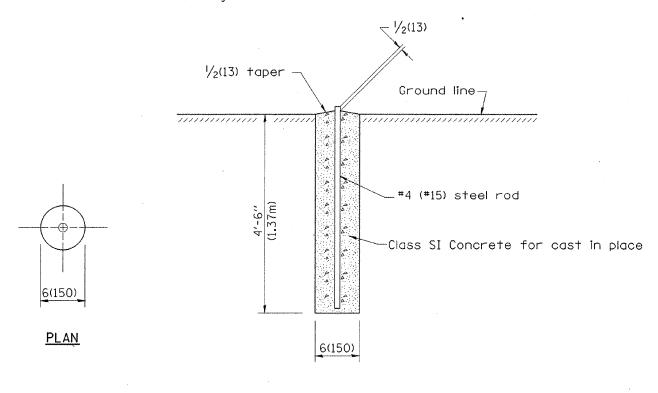

SECTION

PERMANENT SURVEY MARKERS



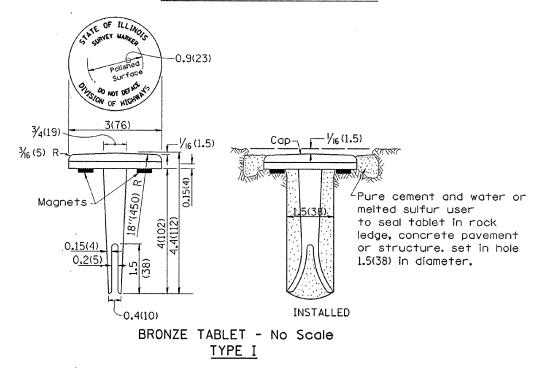

GENERAL NOTES

10(250)

 \triangleright

Class

'SI' oncrete

mix

12 (300) min.

MARKER CAST IN PLACE

TYPE II

11/1/1/1////

 $(2) #4 \times 4'$

-2(50) min.

Ground line

77/25/72

- 1. All type II markers shall be cast in place, and precast markers will not be allowed.
- 2. Two permanent magnets, each having a diameter of $\frac{3}{4}$ (19) and a thickness of $\frac{1}{4}$ (6), or equivalent, shall beattached to the underside of the tablet with an approved epoxy bonding agent.
- 3. The location of the markers shall be in accordance with the plans in general, the markers will be placed at the P.T.'s and P.C.'s of horizontal curves and spaces along the tangents in a way that a minimum of two markers are alway inter-visible, and not to exceed 1000' (300m).
- 4. The markers shall be placed under the direction of the Engineer and shall be installed in a workmanlike manner (#15x1,2m) re-bars in order that there will be no further settlement or horizontal shifting. The monuments shall be placed in a way that the survey point will fall within the portion of the plaque provided for that purpose.
 - 5. The project designation, the centerline station, the survey point, and the elevation shall be permanently marked by the use of metal dies after marker has been installed.

All dimensions are in inches (millimeters) unless otherwise noted.

ILLINOIS DEPA	ARTMENT OF TRANSPORTATION
DISTRIC	T CADD STANDARD
DATE REVISIONS BY	
1-1-97 RENUM. D-3.01, NEW REVISION BOX T.P. PERMA	ANENT SURVEY TIE
ADD DESIGNER NOTE, REVISED TITLE BOX	2
7~7~98 ADD DESIGNER NOTE J.A.	
5-24-06 REMOVED GEN. NOTE UNDER TIES M.A. PERMANEN I SUF	RVEY MARKERS TY.I - TY.II
10-16-06 REVISED TO 2007 SPEC. M.A.	
CADD STD. NO. 66	7101-D4 DRAWN BY CADD
SCALE; NOT DRAWN TO	O SCALE
	CHECKED BY

667101-D4