
REMOVED EXISTING TRAFFIC SIGNAL EQUIPMENT EACH - 1

THE FOLLOWING EXISTING TRAFFIC SIGNAL EQUIPMENT SHALL BE REMOVED BY THE CONTRACTOR, SHALL REMAIN THE PROPERTY OF THE VILLAGE OF OSWEGO AND SHALL BE DELIVERED BY THE CONTRACTOR TO OSWEGO

1 EACH CONTROLLER AND CABINET

THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND DISPOSED OF BY HIM AT HIS EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACT BID PRICE.

14 EACH SIGNAL HEAD, 1- FACE SERVICE INSTALLATION TRAFFIC SIGNAL WOOD POST

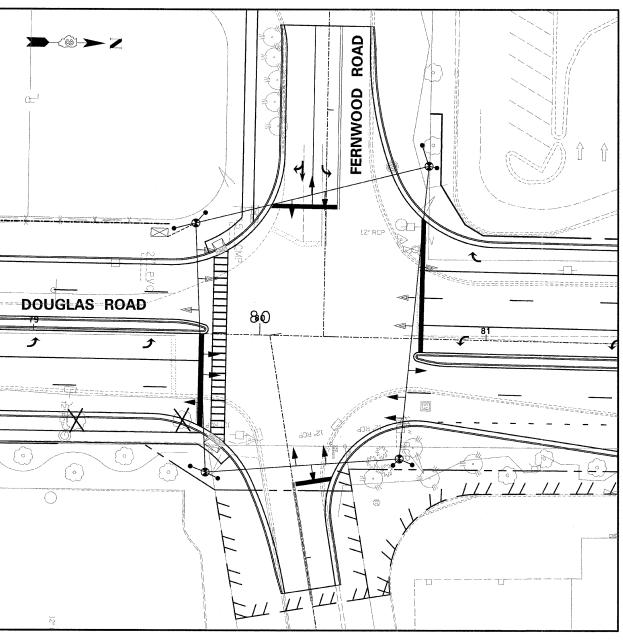

SIGNAL HEADS MAY NEED TO BE MOVED FROM STAGE TO STAGE AS REQUIRED

RTE.	SECTION		COUNTY		SHEETS	NO.
2508	2508 02-00039-00-PV		KENDALL		146	71
STA.		7	O STA		***************************************	
FEO. RO	AD DIST. NO.	ILLIN	OIS FED	. AID	PROJECT	•
						87333
2	Λ	0		20	4	٥

SCALE IN FEET

TEMPORARY TRAFFIC SIGNAL LEGEND

- TEMPORARY TRAFFIC SIGNAL HEAD SPAN WIRE MOUNTED, ORIGINAL LOCATION
- TEMPORARY TRAFFIC SIGNAL HEAD SPAN WIRE MOUNTED, SECONDARY LOCATION*
- TEMPORARY WOOD POLE (CLASS 5 OR BETTER) 45 FOOT MINIMUM
- PROPOSED GUY WIRE TO TEMPORARY WOOD POLE
- TEMPORARY CONTROLLER CABINET
- TEMPORARY SPAN WIRE, TETHER WIRE, AND CABLE
- TEMPORARY SERVICE INSTALLATION
- EMERGENCY VEHICLE LIGHT DETECTOR
- CONFIRMATION BEACON

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT LEGEND

- EXISTING SIGNAL HEAD TO BE REMOVED
- EXISTING SERVICE INSTALLATION TO BE REMOVED
- EXISTING SIGNAL POST AND FOUNDATION TO BE REMOVED
- EXISTING CONTROLLER AND FOUNDATION TO BE REMOVED
- EXISTING HANDHOLE TO BE REMOVED
- EXISTING HEAVY-DUTY HANDHOLE TO BE REMOVED
- EXISTING ALUMINUM MAST ARM POLE AND FOUNDATION TO BE REMOVED
- EXISTING STEEL MAST ARM POLE AND FOUNDATION TO BE REMOVED



R10-12 24" X 30" 3 SIGN REQUIRED

ILLINOIS DEPARTMENT OF TRANSPORTATION F.A.U. 2508 - DOUGLAS ROAD (U.S. RTE 34 TO U.S. RTE 30)

TEMPORARY TRAFFIC SIGNAL INSTALLATION INTERSECTION OF DOUGLAS ROAD AND FERNWOOD ROAD

SCALE: VERT. HORIZ.

DRAWN BY CHECKED BY