

 RTE.	SECTION			COUNTY	TOTAL SHEETS	SHEET NO
T.R. 256	06-11116-0	O-BR		MACON	14	5
STA. 8+67.32		TO	STA.	21+14.18		
FED. ROAD	DIST. NO.	ILLIN	1015	PROJECT:	BR0S-115(6)	5)


CONTRACT NO. 95530



PRIVATE ENTRANCE DETAIL STA. 16+82.83 AGGREGATE BASE COURSE, TYPE B TOTAL ≈ 10 TONS

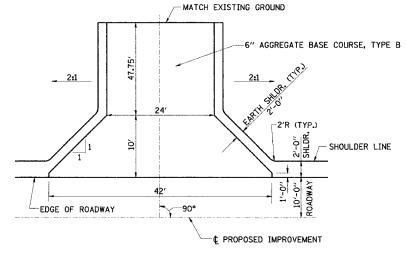

FIELD ENTRANCE DETAIL STA. 13+50.00 AGGREGATE BASE COURSE, TYPE B TOTAL = 57 TONS

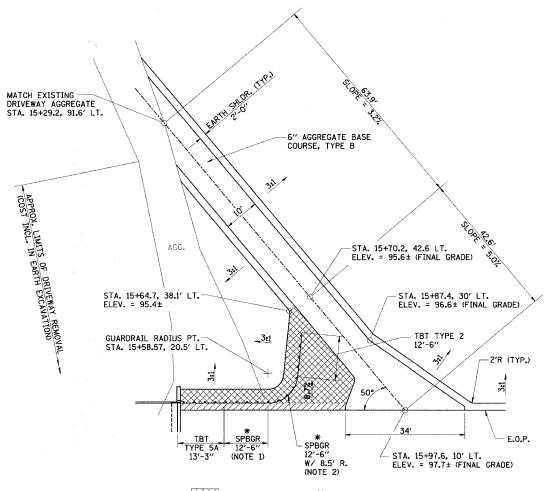

2' SHLDR. SLOPED AT 1/2" / FT.

SLOPED AT 8.7%

* PAY LIMITS OF STEEL PLATE BEAM GUARDRAIL, SHORT RADIUS = 25'-0"

PRIVATE ENTRANCE DETAIL STA. 16+06.00 AGGREGATE BASE COURSE, TYPE B TOTAL = 50 TONS

NOTES:

- 1. CONSTRUCT ACCORDING TO STANDARD 63.011-04
 FOR TRAFFIC BARRIER TERMINAL TYPE 2, EXCEPT DELETE
 END SECTION AND SPLICE INTO RADIUS GUARDRAIL.
- 2. FOR THE 8'-6" RADIUS, THE RAIL IS NOT BOLTED TO THE POST LOCATED AT THE MIDPOINT OF THE CURVE.

ENTRANCE DETAILS