
STA. \_\_\_\_\_

ELEV. \_\_\_\_\_

WATER RESIDENT



DETAIL OF BENCH MARK

Bench Mark to be furnished by the Office of Water Resources.

See Design Plans for location.

Cost of placing shall be considered included with Concrete Box Culverts.

## UTILITY REFERENCE TABLE


J.U.L.I.E.	Call 48 hours prior to construction	(800) 892-0123
Telephone	Mr. John Bachelder OSP National Support / Investigations MCI / Network Services, Inc. 2400 North Glenville Drive Richardson, Texas 75082	(972) 729-6016
	Mr. William O'Conner SBC 162 South York Road Elmhurst, Illinois 60126	(630) 941-4200
Electricity	Mr. John D. Pribich Program Manager, Public Relocation ComEd Three Lincoln Centre Fourth Floor Oakbrook Terrace, Illinois 60181-4260	(630) 437-2212
Water & Sewer	Mr. Ron Sieraski Superintendent of Public Works Village of Schiller Park 9526 West Irving Park Road Schiller Park, Illinois 60176	(847) 822-8592 (847) 671-8521
Gas	Mr. Scott Stogsdill Utility Consultant Nicor Gas 1844 Ferry Road Naperville, Ilinois 60563-9600	(630) 983-8676
Cable Television	Mr. Robert L. Schulter, Jr. Right of Way Manager Comcast Cable Communications, Inc. Greater Chicago Market Affirmation 688 Industrial Drive Elmhurst, Ilinois 60126	(630) 600-6316

## GENERAL NOTES

Signs shall be made of 3/4" plywood or oxboard, or of metal (18 ga.). The Contractor shall furnish all material and labor for constructing and erecting the signs. The signs shall be placed prior to the starting of actual construction operations at each end of the construction section or as directed by the Engineer. Before any sign is erected, it shall be approved by the Engineer as to its appearance and quality of construction. The signs shall remain in place and shall be maintained in satisfactory condition until the project is accepted by the department. The Contractor shall then remove the signs and the material will become his property.

The letters on the sign shall be black mechanical style on a white background and appropriate border lines.

Paid for as Wood Information Signs.

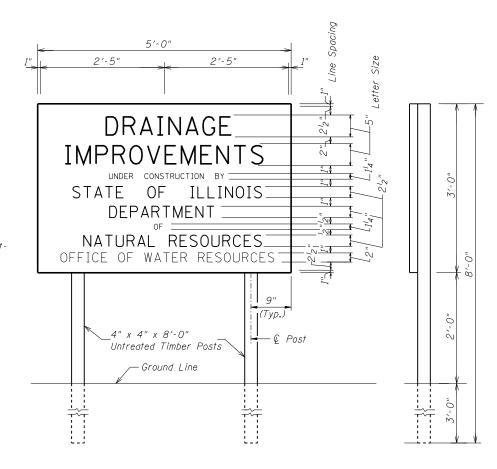

## GENERAL NOTES

- 1. All elevations refer to N.G.V.D. (National Geodetic Vertical Datum).
- 2. The Contractor shall furnish, erect, and when directed by the Engineer, completely remove two construction signs. The exact locations of the signs shall be determined by the Engineer in the field.
- 3. Reinforcement bars shall conform to the requirements of AASHTO M-31 or M-322 Grade 60.
- 4. Class SI Concrete shall be used throughout. All exposed edges of concrete shall be beveled 3/4" unless otherwise shown in the plans.
- 5. All lateral drainage that exists prior to construction shall be restored as shown on the plans and/or as directed by the Engineer. Unless otherwise specified, all costs of restoration shall be considered included with the Contract and no additional compensation will be allowed.
- 6. The Contractor is reminded to protect and restore at his expense, in accordance with Art. 107.20 of the Standard Specifications, any private or public property, including access roads, which may be damaged or destroyed due to construction operations.
- 7. The location, maintenance, removal, and restoration to original condition of all haul roads shall be approved by the Engineer and all cost shall be considered included in the Contract.
- 8. Prior to the beginning of work in the vicinity of the utilities, the Contractor shall contact the owners listed in the utility reference table and schedule work so as not to interfere with required adjustments.
- 9. All unsuitable material and excess excavation shall be disposed of at locations provided by the Contractor at his expense. The locations shall be inspected and approved by the Engineer.
- 10. All construction operations shall be contained within the easement area or work limits as indicated on the plans.
- 11. All open excavations are to be surrounded with a 4'-0" high construction fence during non-working hours. The fence materials are to meet the approval of the Engineer. Cost of the fence shall be considered included in the Contract.
- 12. All dewatering costs shall be considereded included with the contract.
- 13. The Contractor shall notify the Villages of Franklin Park, Schiller Park, and the Township concerning the closing of streets and shall conform to all requirements so specified without additional cost to the State.
- 14. Plan dimensions and details relative to the existing structures have been taken from existing plans and/or past surveys and reports, and are subject to nominal construction variations. It shall be the Contractor's responsibility to verify such dimensions and details in the field and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit bid price for the work.
- 15. All material excavated from the bottom of the existing channel must be deposited in a self-contained area in compliance with all State statutes, regulations, and permit requirements with no discharge to public waters unless a permit has been issued by the Illinois E.P.A.
- 16. The Contractor shall take due care while excavating near existing structures. Any damages caused by the construction activity shall be corrected at the expense of the Contractor.
- 17. With the exception of those utilities designated on the plans to be adjusted by the Contractor, all existing utilities affected by the construction operations shall be adjusted by others. Utilities which do not require adjustment shall be protected and not disturbed. All costs of protection shall be incidental to the Contract, and no additional compensation will be allowed.
- 18. All construction joints shall be bonded unless otherwise noted.
- 19. Channel Excavation shall include the cost of removing and disposing of fences, existing railroad tie, limestone, and concrete walls along the channel and existing riprap and rubble. The existing riprap shall not be re-used on this project.
- 20. The Contractor shall submit his proposed method of maintaining channel flows, for approval by the Engineer, prior to beginning construction.