Filter Fabric

592 Geotextile Table 1 or 2, Class with equivalent beening size of at least 30 for nonwoven and 50 for woven. Fence posts shall be either standard steel post or wood post with a minimum cross-sectional area of 3.0 sq. in. IL-620

**FABRIC ANCHOR DETAIL** 

Temporary sediment fence shall be installed prior to any grading work in the area to be protected. They shall be maintained throughout the construction period and removed in conjunction with the final grading

2. Filter fabric shall meet the requirements of material specification

SILT FENCE PLAN

(Typ)

**ELEVATION** 

SHEET 1 OF 2

ELEVATION


AGGREGATE DITCH CHECK

SILT FILTER FENCE AS A PERIMETER EROSION BARRIER

Fastener - Min. No. 10 Gage Wire
4 Per Post Required. (Typ.)


SECTION A-A

IL-620(W) SHEET 2 OF 2

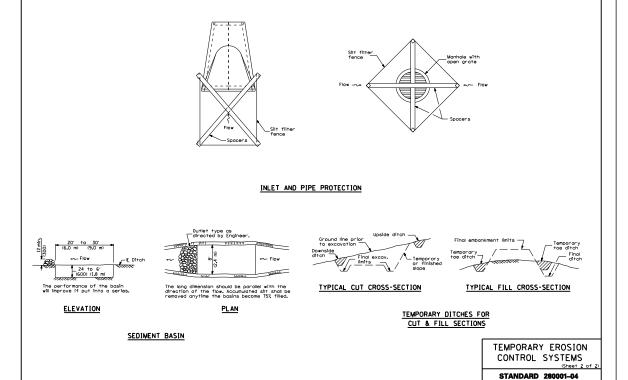

NRCS referenced speci 592 Geotextile

25 Rockfill

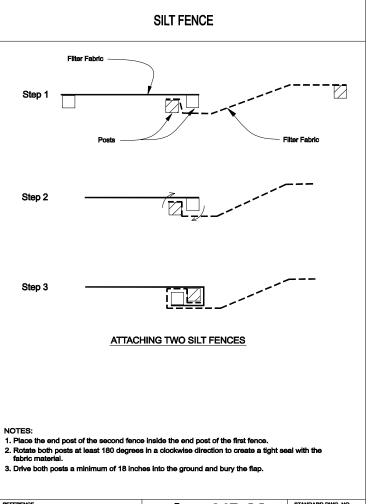

GENERAL NOTES

TEMPORARY EROSION

CONTROL SYSTEMS

STANDARD 280001-04

