




\*\*\* REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

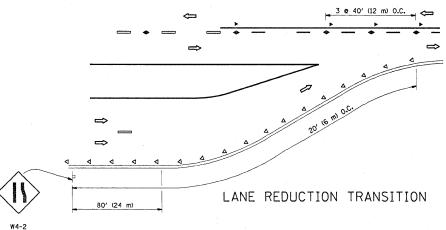

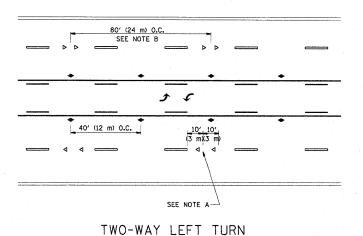

80' (24 m) O.C. SEE NOTE B  $\Rightarrow$ SEE NOTE A-MULTI-LANE/UNDIVIDED

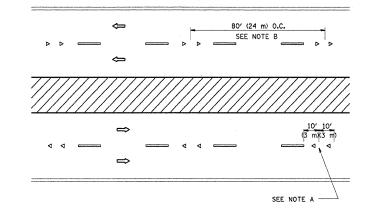

MULTI-LANE/DIVIDED

## GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

## LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

### SYMBOLS

- --- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

#### DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE

# MINIMUM OF 3 W EQUALLY SPACED - 3 @ 80' (24 m) O.C. 3 @ 40' (12 m) 40' (12 m) 40' (12 m) 0.C. \* SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE \*\* WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS USE TWO-WAY MARKERS.

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = gorengautab	DESIGNED -	REVISED	-T. RAMMACHER	09-19-94
c:\pw_work\PWIDOT\GORENGAUTAB\dØ147544\	DistStd.dgn	DRAWN -	REVISED	T. RAMMACHER	03-12-99
	PLOT SCALE = 50.0000 '/ IN.	CHECKED ~	REVISED	T. RAMMACHER	01-06-00
	PLOT DATE = 12/11/2009	DATE -	REVISED	- C. JUCIUS	09-09-09

#### STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

TYPICAL APPLICATIONS		F.A.U. SECTION		COUNTY
RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW R	RESISTANT)	2843 3	248 RS-1	COOK
MAISED REFLECTIVE PAVEIVIENT NIMBREDS (SINOVY-FLOVY R		TC-11		CONTRA
LE: NONE SHEET NO. 1 OF 1 SHEETS STA. T	O STA.	FED. ROAD DIST. NO	. 1 ILLINOIS FED. AI	D PROJECT

COOK 26 21 CONTRACT NO. 60104