LANDSCAPE INSTALLATION GENERAL NOTES:

1. VERIFICATION OF DIMENSIONS AND GRADES, BOTH EXISTING AND PROPOSED, SHALL BE THE CONTRACTOR'S RESPONSIBILITY PRIOR TO COMMENCEMENT OF WORK. THE CONTRACTOR SHALL NOTIFY THE DISTRICT ROADSIDE MANAGEMENT SPECIALIST, 618-346-3198 OF ANY DISCREPANCIES.

2. ALL SURFACE DRAINAGE SHALL BE DIRECTED AWAY FROM BUILDINGS. SURFACE DRAINAGE SHALL BE DIRECTED TO EXISTING DRAINAGE STRUCTURES DESIGNATED FOR THE COLLECTION OF SURFACE RUN-OFF.

3. CONTRACTOR SHALL REPAIR IN KIND ANY AREAS DAMAGED AS A RESULT OF LANDSCAPE OPERATIONS AT NO ADDITIONAL COST TO THE CONTRACT.

4. ALL SODDING, SALT TOLERANT AREAS SHALL HAVE FERTILIZER APPLIED AT A 1:1:1 RATIO AS FOLLOWS:
   NITROGEN FERTILIZER NUTRIENT - 60 LBS/ACRE
   PHOSPHORUS FERTILIZER NUTRIENT - 60 LBS/ACRE
   POTASSIUM FERTILIZER NUTRIENT - 60 LBS/ACRE

5. ALL SEEDING, CLASS 2A AREAS SHALL HAVE FERTILIZER APPLIED AS FOLLOWS:
   NITROGEN FERTILIZER NUTRIENT - 90 LBS/ACRE
   PHOSPHORUS FERTILIZER NUTRIENT - 90 LBS/ACRE
   POTASSIUM FERTILIZER NUTRIENT - 90 LBS/ACRE

6. ALL SEEDING, CLASS 4A AREAS SHALL NOT REQUIRE FERTILIZER NUTRIENTS.

7. EROSION CONTROL BLANKET SHALL BE APPLIED TO ALL SEEDED AREAS.

8. SUPPLEMENTAL WATERING SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AT A RATE OF 3 GAL/SQ YD, OR AT THE RATE DIRECTED BY THE ENGINEER.

9. THE CONTRACTOR SHALL COORDINATE THE LANDSCAPING PLANTING SCHEDULE WITH CONTRACT 76C51, 76C52 AND 76C76 TO ENSURE THAT THE EMBANKMENT GRADES ARE FINALIZED AT THE LIMITS OF BOTH CONTRACTS AND THAT THE PROPOSED LANDSCAPING IMPROVEMENTS CAN BE CONSTRUCTED WITHOUT CONFLICT.

10. THE CONTRACTOR SHALL COORDINATE THE LANDSCAPING PLANTING SCHEDULE WITH CONTRACT 76C54 TO ENSURE THAT THE PROPOSED LIGHTING AND CONDUITS ARE FINALIZED IN THE AREAS OF THE PROPOSED LANDSCAPING, AND THAT THE LANDSCAPING IMPROVEMENTS CAN BE CONSTRUCTED WITHOUT CONFLICT.

11. SELECTIVE MOWING STAKES SHALL NOT BE REQUIRED FOR THIS CONTRACT.

12. CONTRACTOR SHALL CONTACT DAVID WALKER - IDOT ELECTRICAL SERVICES SUPERVISOR AT 618.346.3274 PRIOR TO CONSTRUCTION TO SCHEDULE A WALK THROUGH OF THE SITE TO IDENTIFY ALL DEEP WELLS AND I.T.S. EQUIPMENT.

13. TREES SHALL BE PLANTED AT A MINIMUM 20' C-C SPACING TO ALLOW FOR FUTURE MOWING BETWEEN TREES.

14. IF THE PROPOSED PLANTINGS ARE TO BE LOCATED ON SLOPES 1V:4H OR STEEPER, OR ARE LOCATED IN UNDESIRABLE LOCATIONS, THE PLANTINGS SHALL BE RELOCATED. THE REVISED PLANTING LOCATIONS SHALL BE COORDINATED AND APPROVED BY THE ENGINEER. ANY CONTRACTOR EXPENSE RELATED TO THESE RELOCATIONS SHALL BE CONSIDERED INCIDENTAL TO PLANTING WOODY PLANTS, AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

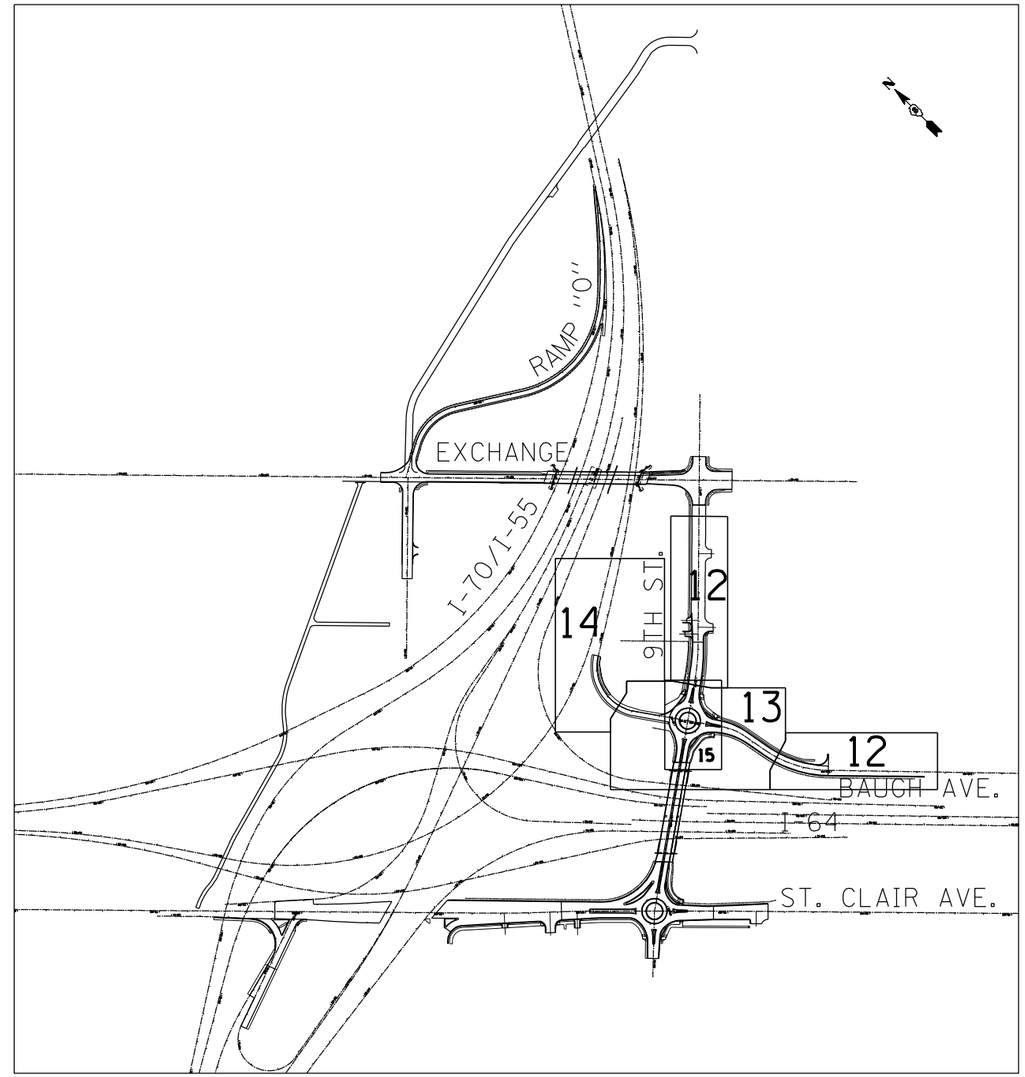

SHEET LAYOUT

..\08TRI-76C51-LAYOUT1.DGN,..\08TRI-76C51-DESIGN.DGN,..\08TRI-35-BORDER1.DGN,..\08TRI-76C55-DESIGN.DGN,..\DBCONN-99-MOTIF1.DGN,..\082-0326_76C51_9TH ST-PLAN.DGN
11:28:2012,13:54:48 BONDNJ03 N:\FS-0044\MAINVAULT\TRANS.07\22022\0869-001\CIVIL\CAD\99 ALL CONTRACTS\TRI\SHEETS CONTRACT 76F35\08TRI-35-SHT-LANDSCAP1.DGN

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - JM	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PROPOSED LANDSCAPING PLANS – GENERAL NOTES	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS / SHEET NO.
		DRAWN - JB	REVISED -			9214	82-1-12LS	ST. CLAIR	29 / 9
TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - ACL	REVISED -					CONTRACT NO. 76F35	
	PLOT DATE = $DATE$	DATE - 08/03/12	REVISED -		SCALE: N/A / SHEET NO. 1 OF 8 SHEETS / STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT	