


ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
T.R. 186A	05-10127-00-BR	JASPER	15	2
CONTRACT NO. 95620		ILLINOIS	PROJECT BROS-079(140)	


DESIGN DATA

LOCAL ROAD
ADT = 100

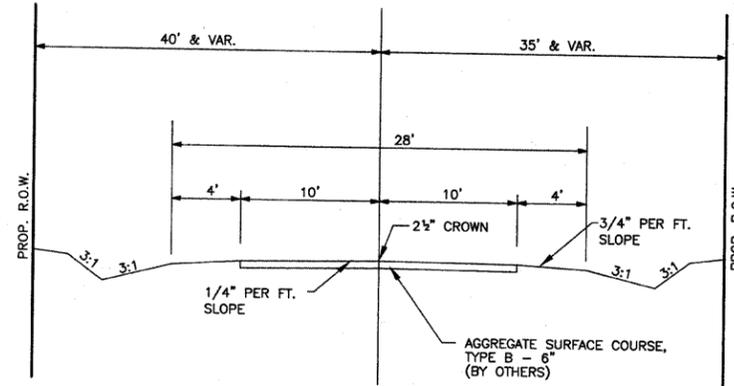


TYPICAL SECTION

PROPOSED

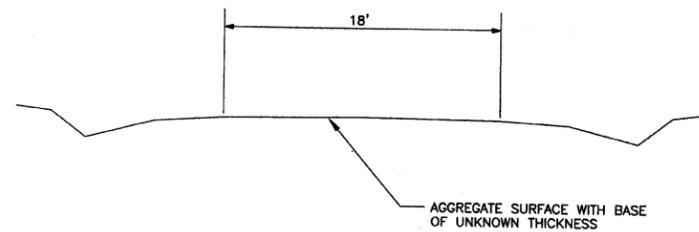

TYPICAL SECTION

EXISTING

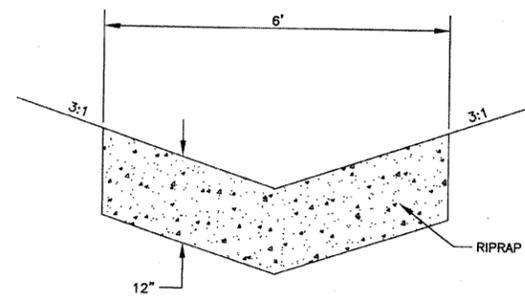

STONE RIPRAP DITCH DETAIL


RT. 4+00 TO 4+75
LT. 5+50 TO 6+10

GENERAL NOTES

- SEEDING: THIS WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF SECTION 250 OF THE STANDARD SPECIFICATIONS AND SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR SEEDING CLASS 2 (SPECIAL).
 - SPRING SEEDING SHALL EXTEND FROM JANUARY 1 TO JUNE 30
 - FALL SEEDING SHALL EXTEND FROM JULY 1 TO DECEMBER 31
- FERTILIZER NUTRIENTS SHALL BE APPLIED AT THE RATE OF 100 LB/ACRE
- MULCHING SHALL BE DONE IN ACCORDANCE WITH ARTICLE 251 OF THE STANDARD SPECIFICATIONS AND SHALL BE DONE BY METHOD 2, PROCEDURE 1 AT THE RATE OF 2 TONS PER ACRE.
- NO PAYMENT FOR OVERHAUL WILL BE MADE ON THIS SECTION.

SUMMARY OF QUANTITIES			
CODE NO.	ITEM	UNIT	QUANTITY
* LR631020	TRAFFIC BARRIER TERMINAL, TYPE 1	EACH	2
Z0065000	SETTING PILES IN ROCK	EACH	5
20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNIT	159
20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNIT	18
20200100	EARTH EXCAVATION	CU YD	70
20300100	CHANNEL EXCAVATION	CU YD	240
20400800	FURNISHED EXCAVATION	CU YD	2800
25001000	SEEDING, CLASS 2 (SPECIAL)	ACRE	0.40
28000305	TEMPORARY DITCH CHECKS	FOOT	20
28000400	PERIMETER EROSION BARRIER	FOOT	965
28100807	STONE DUMPED RIPRAP, CLASS A4	TON	180
28102600	STONE RIPRAP DITCH	TON	120
35101400	AGGREGATE BASE COURSE, TYPE B	TON	85
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50300225	CONCRETE STRUCTURES	CU YD	26.4
50300280	CONCRETE ENCASEMENT	CU YD	8.5
50400605	PRECAST PRESTRESSED CONCRETE DECK BEAMS (33" DEPTH)	SQ FT	2025
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	3000
* 50900205	STEEL RAILING, TYPE S1	FOOT	150
51201600	FURNISHING STEEL PILES HP 12X53	FOOT	187.5
51202305	DRIVING PILES	FOOT	120
51203600	TEST PILE STEEL HP 12X53	EACH	1
51500100	NAME PLATES	EACH	1
* 63100075	TRAFFIC BARRIER TERMINAL, TYPE 5A	EACH	2
67100100	MOBILIZATION	L. SUM	1

* SPECIALTY ITEMS

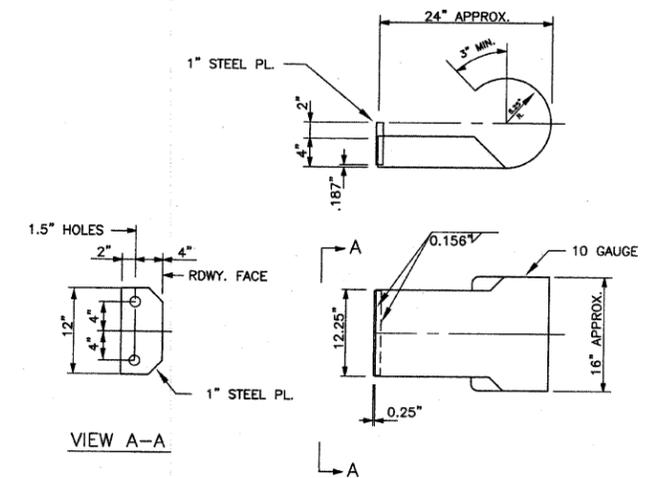

CURLED END SECTION DETAILS

2 REQUIRED - COST INCLUDED IN
"STEEL RAILING, TYPE S-1"