

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION


Contract #76987

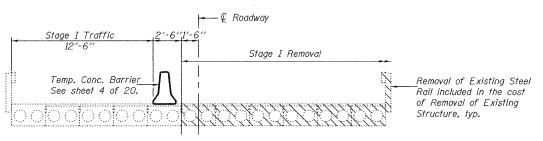


STAGE I REMOVAL

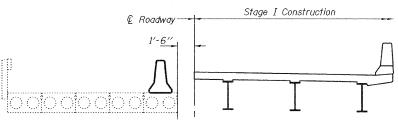

STAGE I CONSTRUCTION

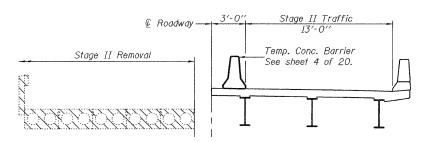

STAGE II REMOVAL

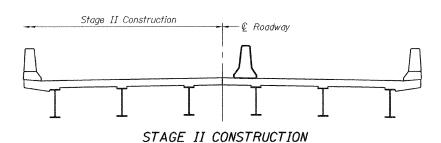

DESIGNED Stephen M. Ryan

CHECKED Michael D. Rolape

DRAWN ØECKY M. LEACH

CHECKED SMR/MDR

DESIGNED Stephen M. Ryan

EXAMINED Thomas Simulations of BRIDGES AND STRUCTURES


ENGINEER OF BRIDGES AND STRUCTURES

Notes:

All staging cross sections are looking East.

Hatched area indicates Removal of Existing Concrete Structures.

For quantity of Temporary Concrete Barrier, see Roadway Plans.

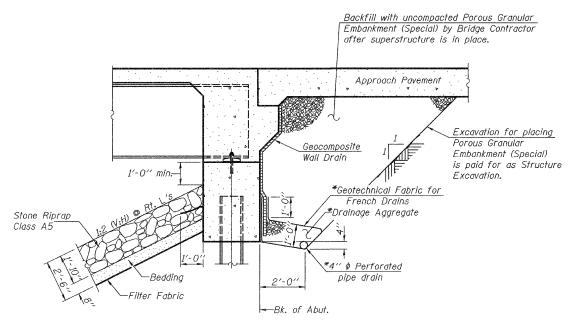

SECTION THRU INTEGRAL ABUTMENT (Horiz. dim. @ Rt. L's)

*Included in the cost of Pipe Underdrains for Structures, 4".

Note:

All drainage system components shall extend to 2'-0'' from the end of each wingwall except an outlet pipe shall extend until intersecting with the side slopes. The pipes shall drain into concrete headwalls. (See Article 601.05 of the Standard Specifications and Highway Standard 601101).

STAGE CONSTRUCTION DETAILS

F.A.P. ROUTE 761 - SECTION 104-BR-2

GREENE COUNTY

STATION 1123+58.50

STRUCTURE NO. 031-0042