

SIGN DETAIL
1:10

SIGN NUMBER Spring Lake Dr
WIDTH x HIGHT. 6'-0" x 2'-6"
BORDER WIDTH 0.75"
CORNER RADIUS 2.25"
MOUNTING Overhead
BACKGROUND TYPE: Reflective
 COLOR: Green
LEGEND/BORDER TYPE: Reflective
 COLOR: White/White



BORDER
R=2.25"
TH=0.75"
IN=0.38"

FONT:
(1) ClearviewHwy-3-W 15 Sq. Ft. each
2 Required

Panel Style: Street name Sign.ssi
M.U.T.C.D.: 2003 Edition
Letter locations are panel edge to lower left corner

SYMBOL	ROT	X	Y	WID	HT

LETTER POSITIONS (X)										LENGTH	SERIES/SIZE		
S	p	r	i	n	g	L	a	k	e			ClearviewHwy-3-W	
2.5	9.5	16.8	21.7	25.6	32.6	37.9	45	50.5	57.9	64.2	67	86.5	
D	r	i	v	e									ClearviewHwy-3-W
22.7	30.5	35.4	38.6	45.3							27.9	86.5	

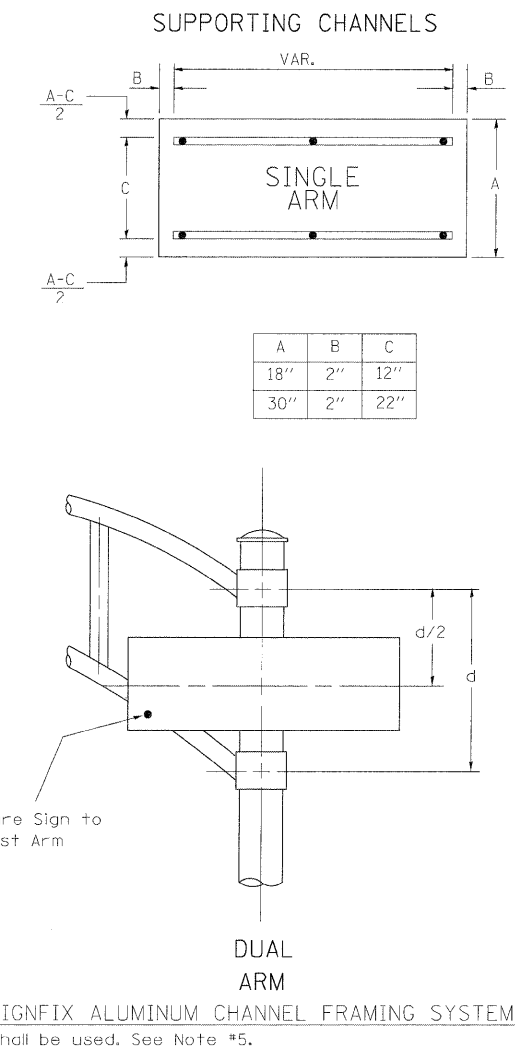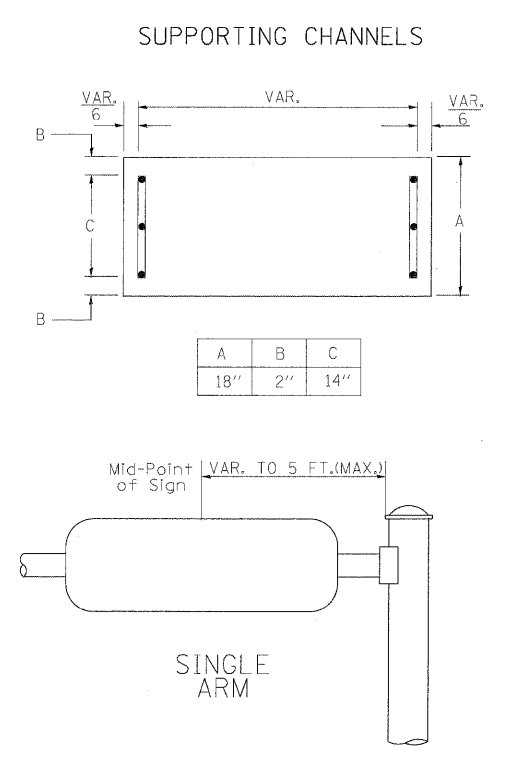

SIGN DETAIL
1:10

SIGN NUMBER Irving Park Rd
WIDTH x HIGHT. 6'-0" x 2'-6"
BORDER WIDTH 0.75"
CORNER RADIUS 2.25"
MOUNTING Overhead
BACKGROUND TYPE: Reflective
 COLOR: Green
LEGEND/BORDER TYPE: Reflective
 COLOR: White/White

BORDER
R=2.25"
TH=0.75"
IN=0.38"

FONT:
(1) ClearviewHwy-3-W 15 Sq. Ft. each
2 Required

Panel Style: Street name Sign.ssi
M.U.T.C.D.: 2003 Edition
Letter locations are panel edge to lower left corner

SYMBOL	ROT	X	Y	WID	HT

LETTER POSITIONS (X)										LENGTH	SERIES/SIZE			
I	L	L	R	t	e	1	9					ClearviewHwy-3-W		
x	x	x	x	x	x	x	x	x	x	36.5	86.5			
I	r	v	i	n	g	P	a	r	k	R	d			ClearviewHwy-3-W
x	x	x	x	x	x	x	x	x	x	x	x	67	86.5	

GENERAL NOTES

- WHERE MAST ARM MOUNTED STREET NAME SIGNS ARE SPECIFIED, THE MAST ARM ASSEMBLY AND POLES SHALL BE DESIGNED TO SUPPORT THE LOADINGS CALLED FOR ON STANDARDS 877001, 877002, 877006, 877011 AND 877012, AS APPLICABLE, PLUS TWO (2) SIGN PANELS 2'-6" x 8'-0" MOUNTED AS SHOWN. THE DESIGN SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT "STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS" AS PUBLISHED BY THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS FOR 80 M.P.H. WIND VELOCITY.
 - ALL SIGNS SHALL HAVE A WHITE 3-W CLEARVIEW HIGHWAY FONT WITH 3M-S NEW DG3 REFLECTIVE LEGEND AND BORDER ON A GREEN 3M-S NEW DG3 REFLECTIVE BACKGROUND SHEETING.
 - THE SIGN LENGTH SHOULD BE INCREASED IN 6-INCH INCREMENTS, BUT THE OVERALL LENGTH SHOULD NOT EXCEED 8'-0".
 - ALL BORDERS SHALL BE 3/4" WIDE AND CORNER RADIUS SHALL BE 2-1/4".
 - SIGNFIX ALUMINUM CHANNEL FRAMING SYSTEM SHALL BE USED FOR ALL SIGNS ATTACHED TO SIGNAL POLES AND POSTS. LOCAL SUPPLIERS OF THE SIGNFIX ALUMINUM CHANNEL FRAMING SYSTEM ARE:

* A.K.T. CORPORATION	* AMERICAN FABRICATION CO.
SCHAUMBURG, IL	CHICAGO HEIGHTS, IL
* TUCKER COMPANY, INC.	* WESTERN TRAFFIC CONTROL INC.
WAUWATOSA, WI	CICERO, IL
- PARTS LISTING:**
 SIGN CHANNEL PART #HPN053 (MED. CHANNEL)
 SIGN SCREWS 1/4" x 14 x 1" H.W.H. #3
 SELF TAPPING WITH NEOPRENE WASHER
 BRACKETS PART #HPN034 (UNIVERSAL)
 CHANNEL CLAMPS WITH STAINLESS STEEL STRAPPING
 OTHER BRANDS OF MOUNTING HARDWARE ARE ACCEPTABLE, BASED UPON THE DEPARTMENT'S APPROVAL AND COMPATIBILITY WITH THE CHANNEL/BRACKET OF THE ABOVE PRODUCT.