

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 1384	*	Fulton	21	3
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

•07-00117-03-BR

SCHEDULE OF QUANTITIES

EARTH EXCAVATION				
LOCATION				CU. YD.
STA. 9+06.75	TO	STA. 9+42.25	24' wide	42.5
STA. 10+57.75	TO	STA. 10+93.25	24' wide	42.5
TOTAL				85

BRIDGE DECK GROOVING				
LOCATION				SQ. YD.
STA. 9+12.75	TO	STA. 9+42.75	24' wide	80
STA. 9+42.75	TO	STA. 10+57.25	28'-8" wide	365
STA. 10+57.25	TO	STA. 10+87.25	24' wide	80
TOTAL				525

SUB-BASE GRANULAR MATERIAL, TYPE A 4"		
LOCATION		SQ. YD.
STA. 9+15.75	TO STA. 9+42.75	72
STA. 10+57.25	TO STA. 10+84.25	72
TOTAL		144

PROTECTIVE COAT		
LOCATION		SQ. YD.
STA. 9+12.75	TO STA. 9+42.75 24' wide	80
STA. 9+42.75	TO STA. 10+57.25 27'-8" wide	365
STA. 10+57.25	TO STA. 10+87.25 24' wide	80
TOTAL		525

AGGREGATE SHOULDERS, TYPE B		
LOCATION		TONS
STA. 9+06.75	TO STA. 9+42.75	8
STA. 10+57.25	TO STA. 10+93.25	8
TOTAL		16


STEEL PLATE BEAM GUARDRAIL, TYPE A				
LOCATION				FOOT
STA. 6+67.75	TO	STA. 9+29.50	LEFT	262
STA. 6+67.75	TO	STA. 9+29.50	RIGHT	262
STA. 11+35.25	TO	STA. 13+32.25	LEFT	197
STA. 10+70.50	TO	STA. 13+32.25	RIGHT	262
TOTAL				983

PAVEMENT REMOVAL		
LOCATION		SQ. YD.
STA. 9+06.75	TO STA. 9+42.75 24' wide	96
STA. 10+57.25	TO STA. 10+93.25 24' wide	96
TOTAL		192


GUARDRAIL REMOVAL				
LOCATION				FOOT
STA. 9+20	TO	STA. 9+43	LEFT	23
STA. 9+02	TO	STA. 9+43	RIGHT	41
STA. 10+57	TO	STA. 10+75	LEFT	18
STA. 11+10	TO	STA. 11+95	LEFT	85
STA. 10+57	TO	STA. 11+24	RIGHT	67
TOTAL				234

TRAFFIC BARRIER TERMINAL, TYPE 5A				
LOCATION				EACH
STA. 9+29.50	TO	STA. 9+42.75	LEFT	1
STA. 9+29.50	TO	STA. 9+42.75	RIGHT	1
STA. 10+57.25	TO	STA. 10+70.50	LEFT	1
STA. 10+57.25	TO	STA. 10+70.50	RIGHT	1
TOTAL				4


TRAFFIC BARRIER TERMINAL, TYPE I				
LOCATION				EACH
STA. 6+42.75	TO	STA. 6+67.75	LEFT	1
STA. 6+42.75	TO	STA. 6+67.75	RIGHT	1
STA. 10+85.50	TO	STA. 10+85.50	LEFT	1
STA. 11+10.25	TO	STA. 11+35.25	LEFT	1
STA. 13+32.25	TO	STA. 13+57.25	LEFT	1
STA. 13+32.25	TO	STA. 13+57.25	RIGHT	1
TOTAL				6

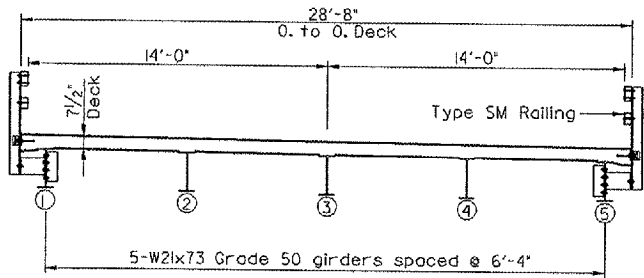

SUPERSTRUCTURE SECTION - SPANS 1 & 2
Looking upstation.

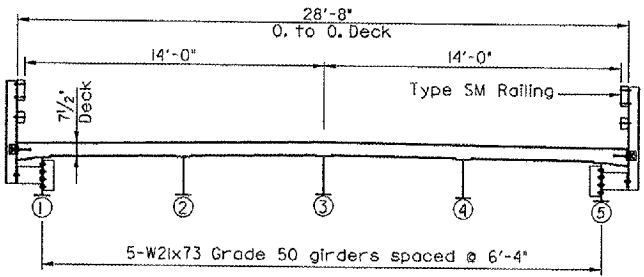

SUPERSTRUCTURE SECTION - SPANS 3 & 4
Looking upstation.

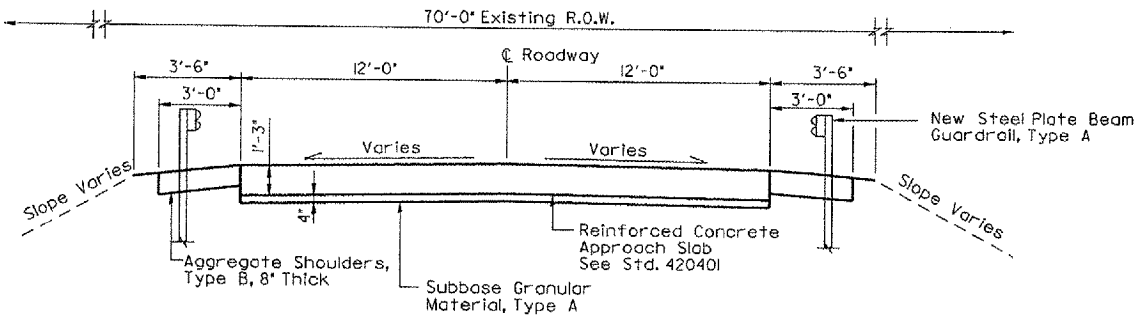

PROPOSED TRANSITION SECTION
Adjacent to the bridge

DSGN	K.J. Hoffmann
DR	K.J. Hoffmann
CHK	J.R. Wolf
APVD	J.A. Fraenhoffer

NO.	DATE	REVISION	BY	APVD

FRAUENHOFER

Frauenhoffer and Associates, P.C. Consulting Engineers
3002 Crossing Court Champaign, IL 61822 217-351-6268

SCHEDULE OF QUANTITIES AND TYPICAL SECTIONS

FAS 1384 (COUNTY HIGHWAY 27)
SECTION 07-00117-03-BR
FULTON COUNTY

SHEET	3
DWG NO.	7022-sum.dgn
DATE	OCT 2007
PROJ NO.	7022