

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES
- 3 SUMMARY OF QUANTITIES
- 4 - 5 SCHEDULES
- 6 - 7 TYPICAL PAVEMENT MARKING DETAILS

HIGHWAY STANDARDS

- 000001-08 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701101-05 OFF-ROAD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
- 701106-02 OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' AWAY
- 701427-05 LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≤ 40 MPH
- 701901-10 TRAFFIC CONTROL DEVICES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED
HIGHWAY PLANS

F.A.P. ROUTES 68 (IL 23), 653 (IL 18)
SECTION CONTRAST PAVEMENT MARKING 2025-2
PAVEMENT MARKING
LASALLE AND LIVINGSTON COUNTIES


BEGIN IMPROVEMENT
F.A.P. ROUTE 68 (IL 23)
RICHARDS RD.

C-93-054-25

BEGIN IMPROVEMENT
F.A.P. ROUTE 653 (IL 18)
SECOND AVE.

12TH STREET
(LIVINGSTON COUNTY LINE)

END IMPROVEMENT
F.A.P. ROUTE 653 (IL 18)
WASSON STREET

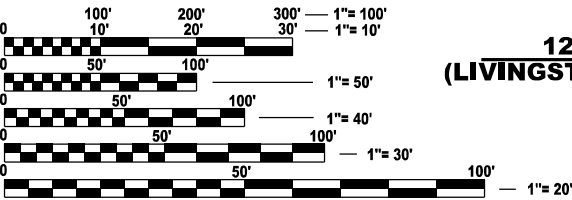


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER JUNIOR SENAT
UNIT CHIEF RON WOODSHANK
DISTRICT 3 (815) 434-6131
CONTRACT NO. 66R06

END IMPROVEMENT
F.A.P. ROUTE 68 (IL 23)
ADAMS STREET

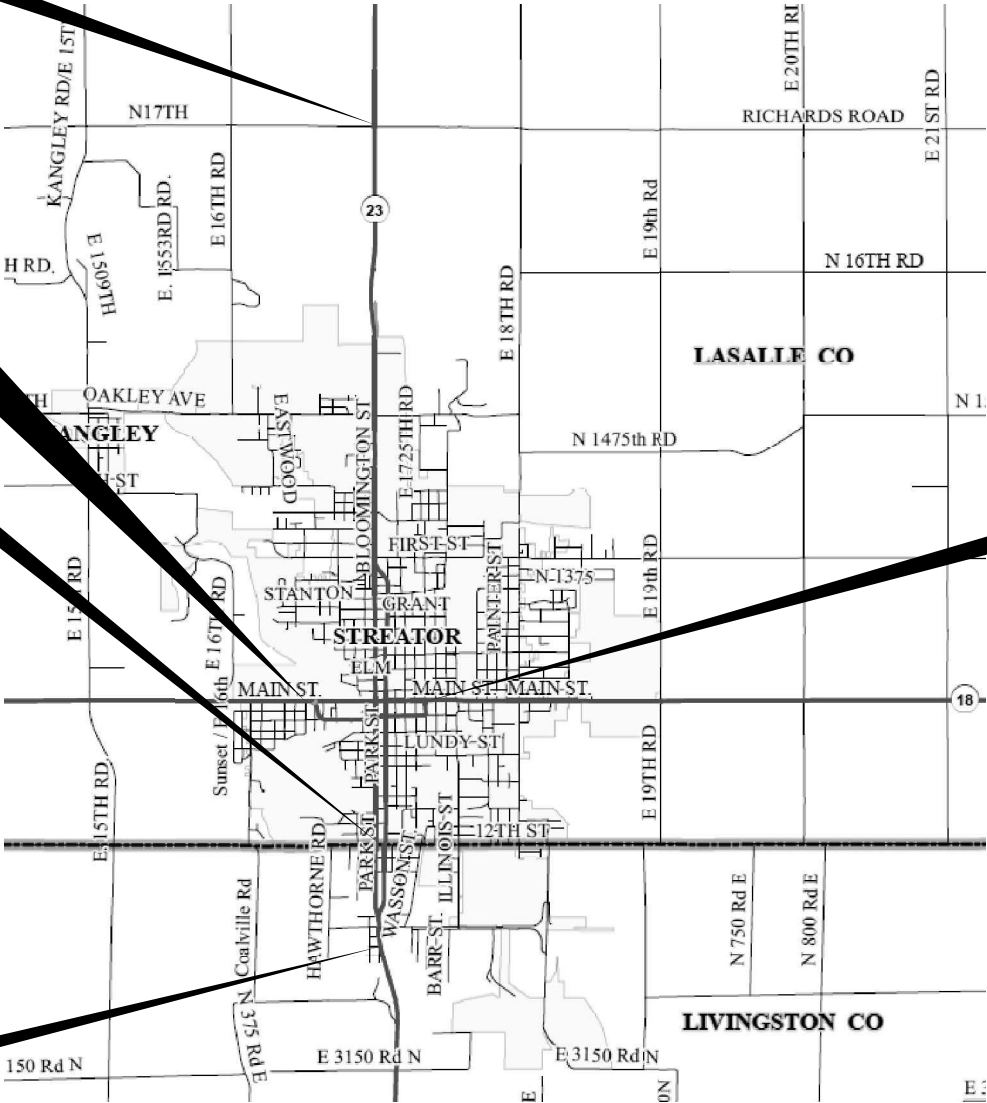

GENERAL NOTES

NONE

COMMITMENTS

NONE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

START & END DATES
OF CONSTRUCTION:

INSPECTORS:

MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\104730066R06.dgn

	USER NAME = ronald.woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -					68,653	CONTRAST PAVEMENT MARKING 2025-2	LAS,LIV	7	2
		CHECKED - JS	REVISED -					CONTRACT NO. 66R06				
	PLOT DATE = 12/17/2024	DATE - 11/6/2024	REVISED -		SCALE:	SHEET 1 OF 1 SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\104730066R06.dgn


CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				100% STATE	
				LASALLE CO.	LIVINGSTON CO.
				PAVEMENT MARKING	PAVEMENT MARKING
				0021 URBAN	0021 URBAN
67100100	MOBILIZATION	L SUM	1	0.5	0.5
78004645	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 9"	FOOT	16583	15033	1550
78004655	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 11"	FOOT	7272	7176	96
78011050	GROOVING FOR RECESSED PAVEMENT MARKING 10"	FOOT	16583	15033	1550
78011060	GROOVING FOR RECESSED PAVEMENT MARKING 12"	FOOT	7272	7176	96
78300201	PAVEMENT MARKING REMOVAL GRINDING	SQ FT	12961	12122	839

	USER NAME = ronald.woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -					68,653	CONTRAST PAVEMENT MARKING 2025-2	LAS,LIV	7	3
		CHECKED - JS	REVISED -					CONTRACT NO. 66R06				
	PLOT DATE = 12/17/2024	DATE - 11/6/2024	REVISED -		SCALE:	SHEET 1 OF 1 SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT				


MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\10473006R06.dgn

SCHEDULE - PAVEMENT MARKING										
LOCATION			PREFORMED PLASTIC PAVEMENT MARKING TYPE D - STANDARD - LINE 9"		PREFORMED PLASTIC PAVEMENT MARKING TYPE D - STANDARD - LINE 11"			GROOVING FOR RECESSED PAVEMENT MARKING 10"	GROOVING FOR RECESSED PAVEMENT MARKING 12"	PAVEMENT MARKING REMOVAL GRINDING
			CENTERLINE SKIP-DASH	CENTERLINE SKIP-DASH	LANE LINE SKIP-DASH	LANE LINE	LANE LINE			
			CONTRAST (BLACK/WHITE/BLACK)	CONTRAST (BLACK/YELLOW/BLACK)	CONTRAST (BLACK/WHITE/BLACK)	CONTRAST (BLACK/WHITE/BLACK)	CONTRAST (BLACK/YELLOW/BLACK)			
			FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT
LIVINGSTON COUNTY										
IL ROUTE 23 SOUTHBOUND (BLOOMINGTON ST.)										
12TH ST.	TO	PALMER AVE.	600		66	30		600	96	364
IL ROUTE 23 NORTHBOUND (PARK ST.)										
PALMER AVE.	TO	12TH ST.	700					700		350
IL ROUTE 23										
PALMER AVE.	TO	ADAMS ST.		250				250		125
SUBTOTALS			1300	250	66	30	0			
IL ROUTE 18 TOTALS			1550		96			1550	96	839


	USER NAME = ronald.woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES GRUNDY COUNTY				F.A.P. RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -						68,653	CONTRAST PAVEMENT MARKING 2025-2		LAS,LIV	7	5
		CHECKED - JS	REVISED -						CONTRACT NO. 66R06					
	PLOT DATE = 12/17/2024	DATE - 11/6/2024	REVISED -		SCALE:	SHEET 2	OF 2 SHEETS	STA.	TO STA.					
					ILLINOIS FED. AID PROJECT									

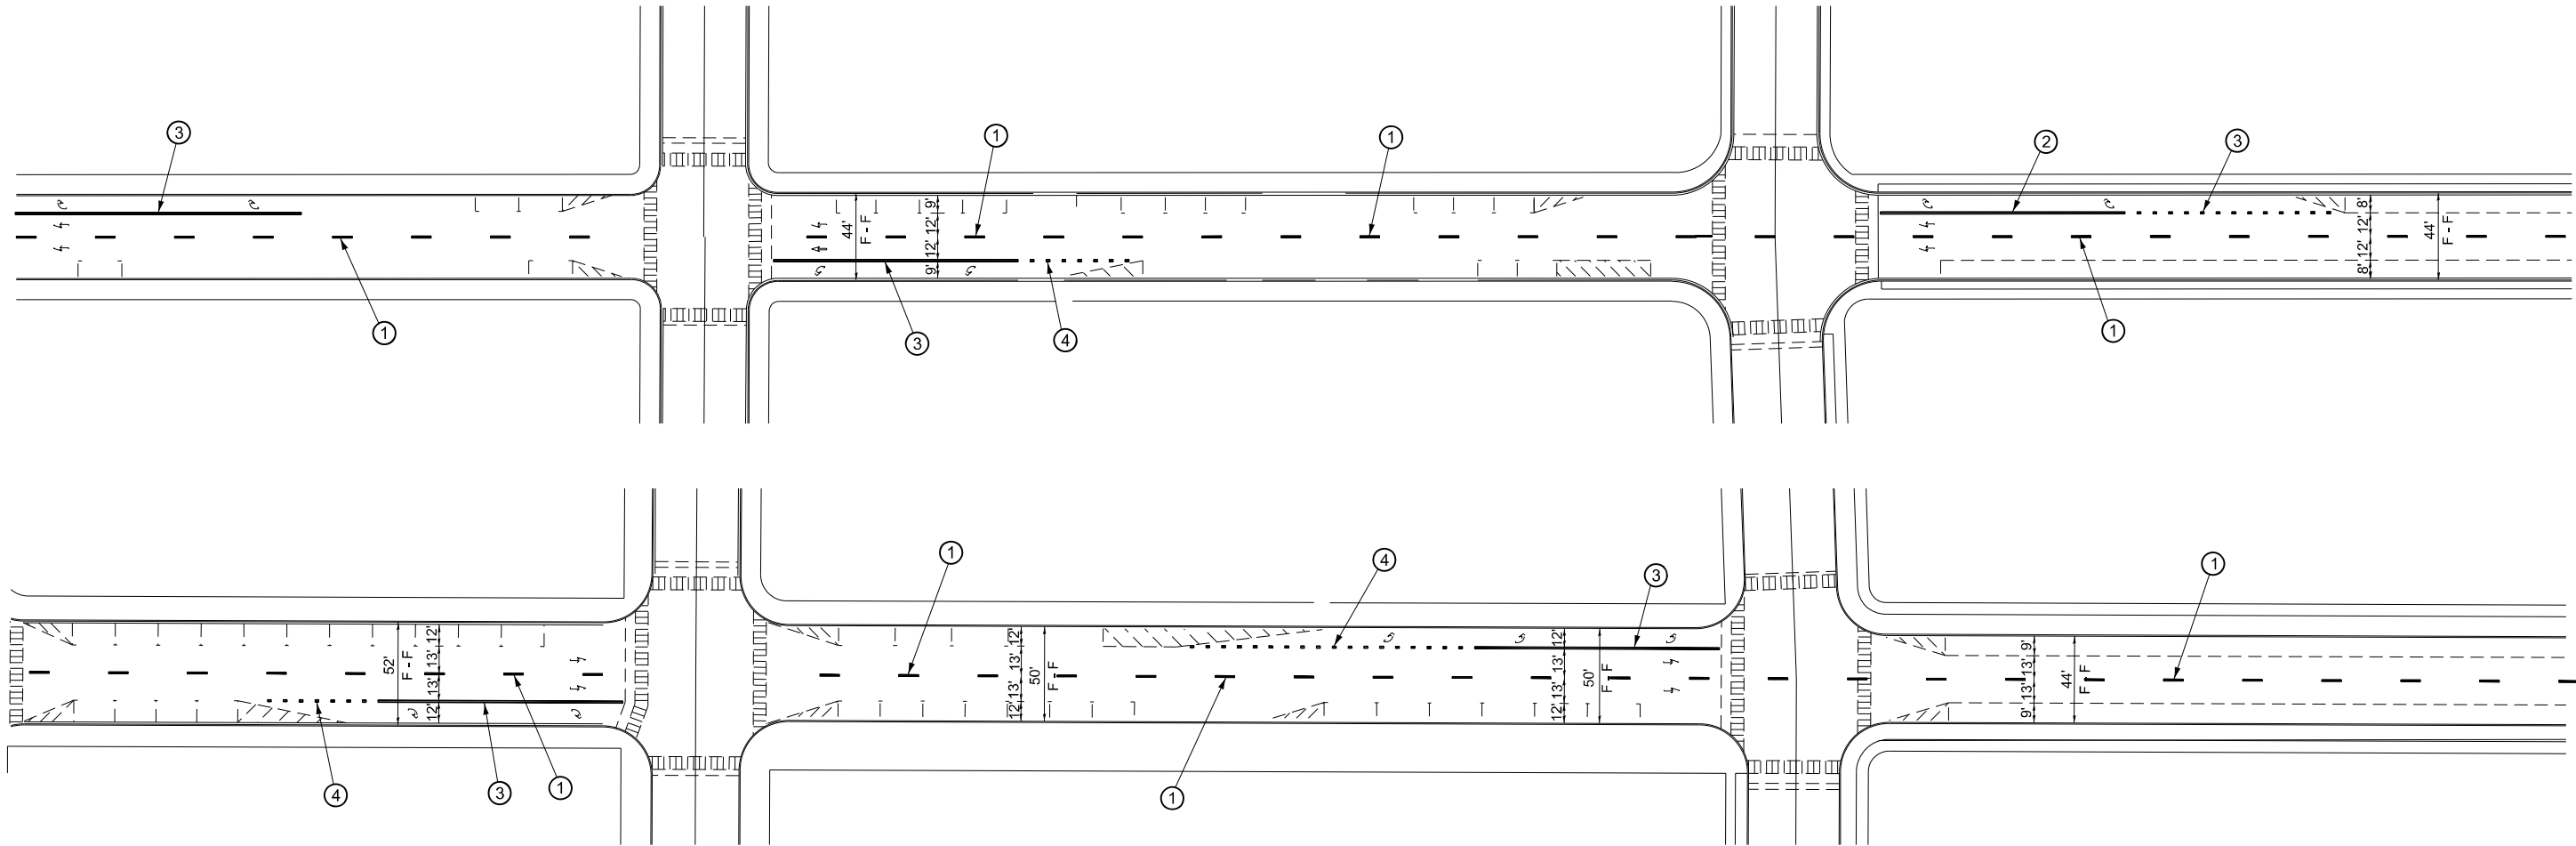


TYPICAL DIVIDED MULTI - LANE, 2 WAY ROADWAY
CENTERLINE CONTRAST 9" PAVEMENT MARKING LINE (WHITE, SKIP - DASH)
CONTRAST 11" LANE LINE (WHITE) / LANE LINE (WHITE, SKIP-DASH)

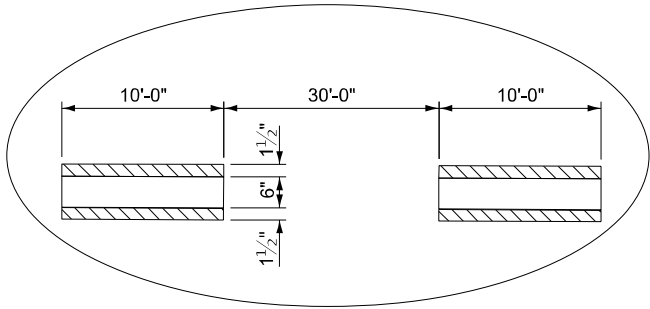


TYPICAL CENTERLINE STRIPING
(SKIP-DASH)

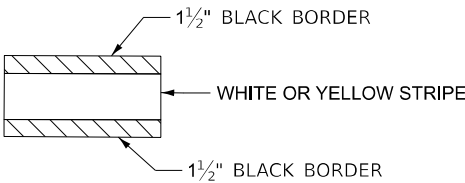

CONTRAST PAVEMENT MARKING DETAIL

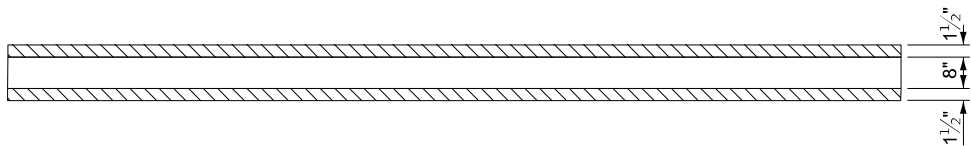

TYPICAL 8" LANE LINE

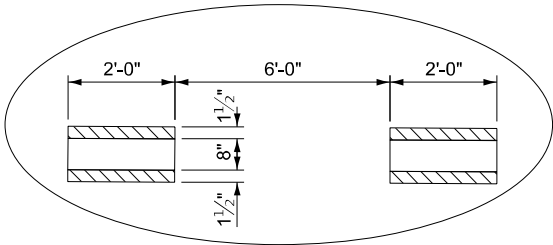


TYPICAL 8" LANE LINE (SKIP-DASH)

- ① PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 9" (SKIP-DASH, WHITE)
GROOVING FOR RECESSED PAVEMENT MARKING 10"
- ③ PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 11" (WHITE)
GROOVING FOR RECESSED PAVEMENT MARKING 12"
- ④ PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 11" (SKIP-DASH, WHITE))
GROOVING FOR RECESSED PAVEMENT MARKING 12"

MODEL: Default
FILE NAME: c:\pwwork\woodshank\104730066R06.dgn


	USER NAME = ronald.woodshank			DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL PAVEMENT MARKING DETAILS			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				DRAWN - RW	REVISED -					68,653	CONTRAST PAVEMENT MARKING 2025-2	LAS,LIV	7	6
				CHECKED - JS	REVISED -					CONTRACT NO. 66R06				
	PLOT DATE = 12/17/2024			DATE - 11/6/2024	REVISED -		SCALE:	SHEET 1	OF 2	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

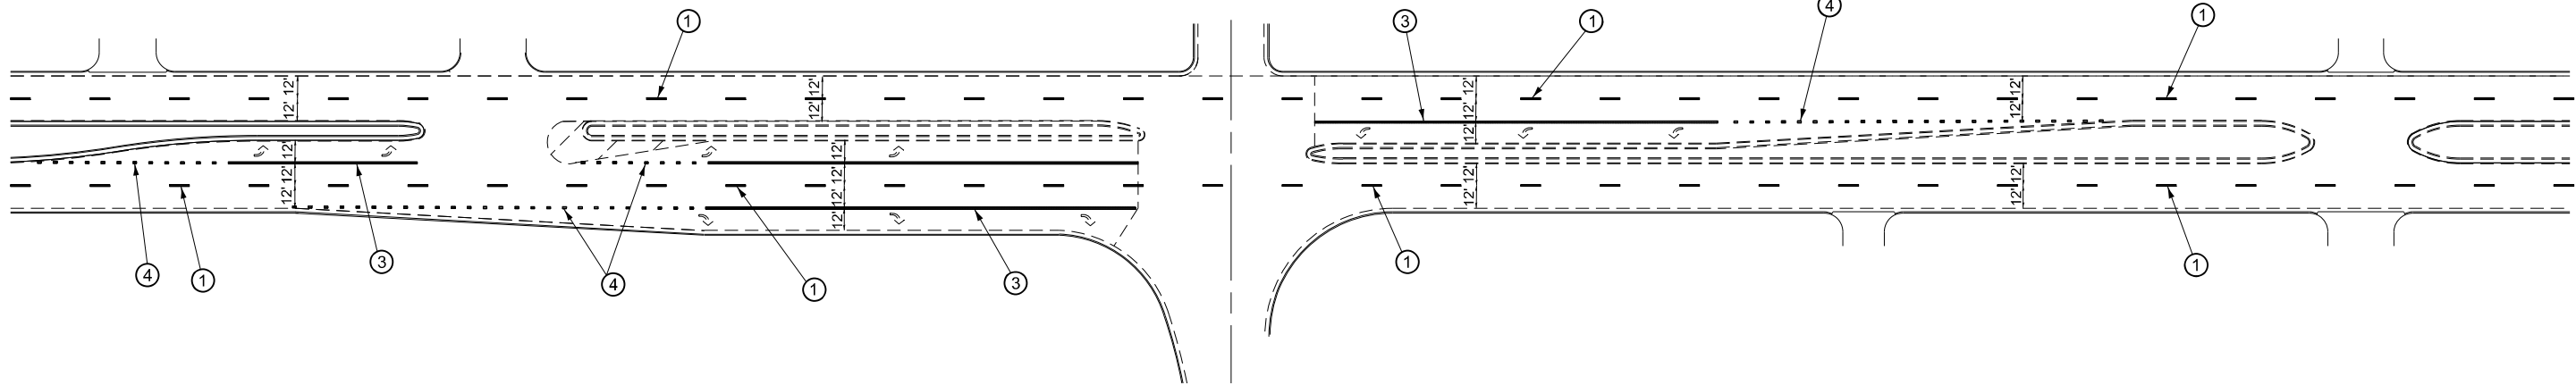

TYPICAL UNDIVIDED MULTI - LANE, 2 WAY ROADWAY (WITH NON-TRAVERSABLE MEDIAN)

CENTERLINE CONTRAST 9" PAVEMENT MARKING LINE (WHITE, SKIP - DASH)


CONTRAST 11" LANE LINE (WHITE) / LANE LINE (WHITE, SKIP-DASH)

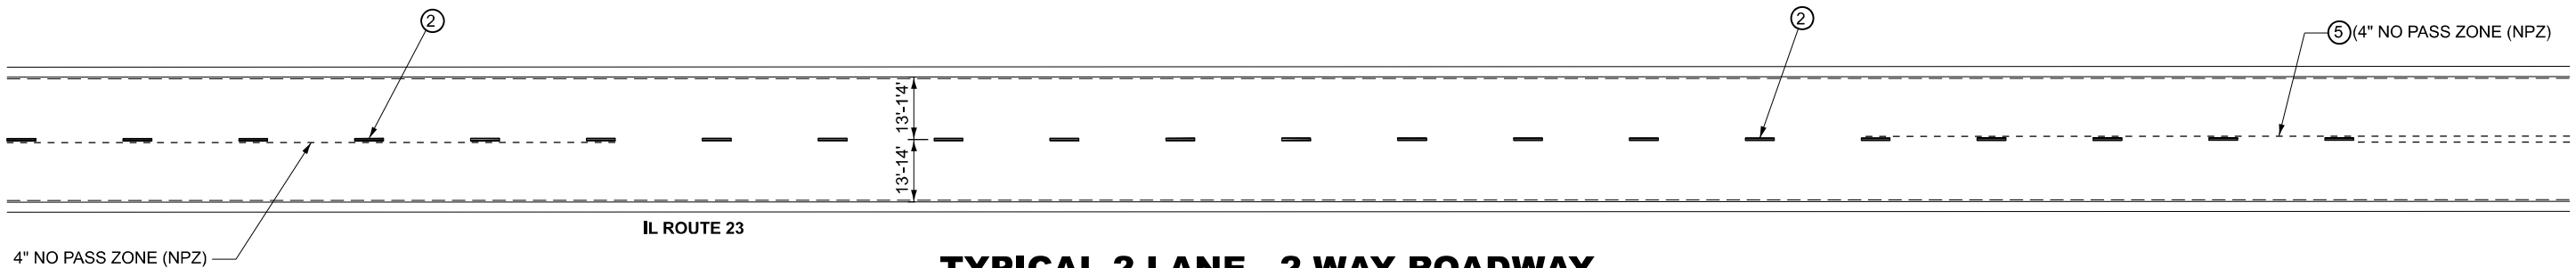


TYPICAL 2 LANE - 2 WAY ROADWAY

CENTERLINE CONTRAST 9" PAVEMENT MARKING LINE (YELLOW, SKIP - DASH)


WITH OR WITHOUT 4" NO PASSING ZONE (NPZ)

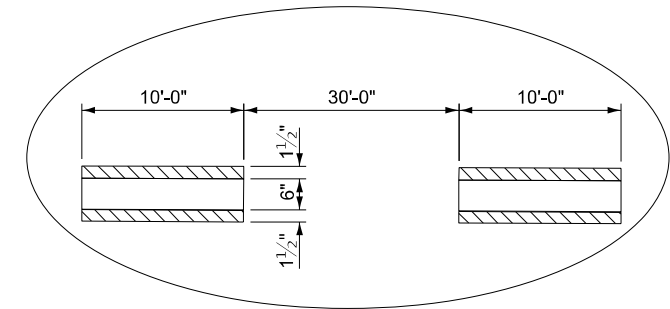


**TYPICAL CENTERLINE STRIPING
(SKIP-DASH)**

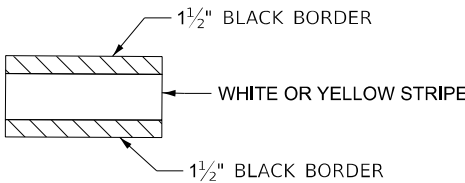

CONTRAST PAVEMENT MARKING DETAIL

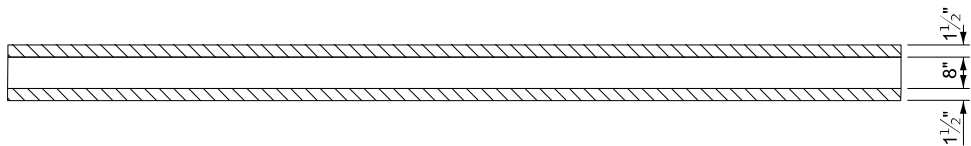

TYPICAL 8" LANE LINE

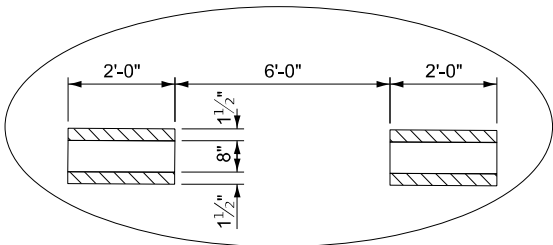

TYPICAL 8" LANE LINE (SKIP-DASH)

- ① PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 9" (WHITE, SKIP-DASH)
GROOVING FOR RECESSED PAVEMENT MARKING 10"
- ② PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 9" (YELLOW, SKIP-DASH)
GROOVING FOR RECESSED PAVEMENT MARKING 10"
- ③ PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 11" (WHITE)
GROOVING FOR RECESSED PAVEMENT MARKING 12"
- ④ PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 11" (WHITE, SKIP-DASH)
GROOVING FOR RECESSED PAVEMENT MARKING 12"
- ⑤ PREFORMED PLASTIC PAVEMENT MARKING
TYPE D - STANDARD LINE 11" (YELLOW)
GROOVING FOR RECESSED PAVEMENT MARKING 12"

MODEL: Default
FILE NAME: c:\pwwork\woodshank\104730066R06.dgn

	USER NAME = ronald.woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL PAVEMENT MARKING DETAILS				F.A.P. RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -						68,653	CONTRAST PAVEMENT MARKING 2025-2		LAS,LIV	7	7
		CHECKED - JS	REVISED -					CONTRACT NO. 66R06						
	PLOT DATE = 12/17/2024	DATE - 11/6/2024	REVISED -		SCALE:	SHEET 2	OF 2	SHEETS	STA.	TO STA.				
														ILLINOIS FED. AID PROJECT