


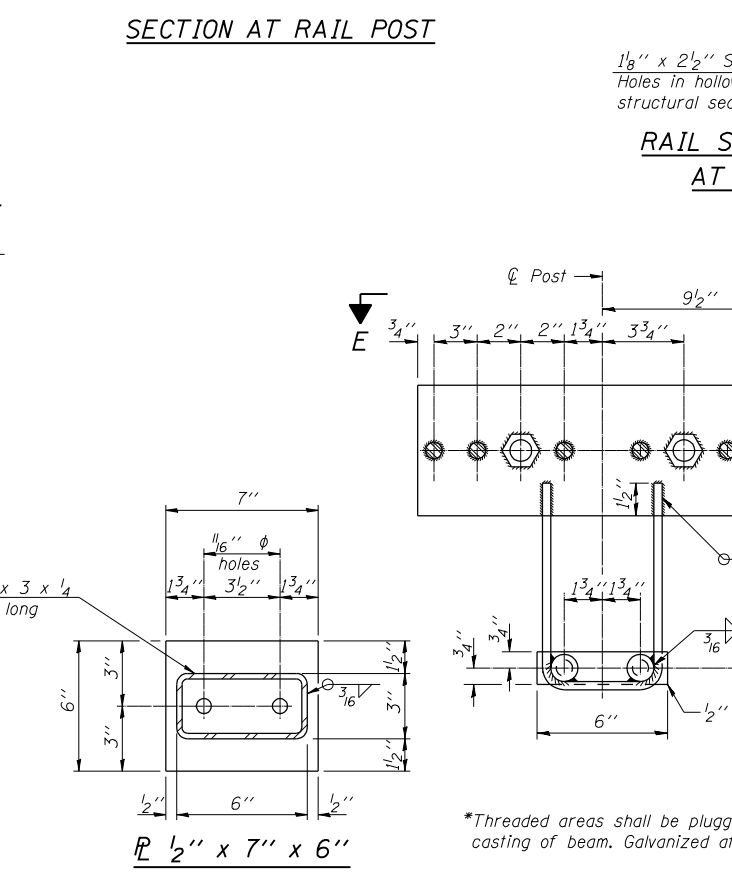

Notes:
All field drilled holes shall be coated with an approved zinc rich paint before erection.
For multi-span bridges, sufficient 1/4" x 6" x 1'-2" galvanized steel shims shall be provided to align rail between adjacent spans. Cost included with Steel Railing, Type SM.
Steel rail elements shall be galvanized according to Article 509.05 of the Standard Specifications.
The studs of the anchor devices shall be placed below the top reinforcement bars and the outermost longitudinal reinforcement bar shall be placed directly above the studs of the rail post anchor device.

<i>Item</i>	<i>Unit</i>	<i>Quantity</i>
<i>Steel Railing, Type SM</i>	<i>Foot</i>	<i>128</i>

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
852	18-B-4-R-2	WILL	44	26
		CONTRACT NO. 60N20		
ILLINOIS FED. AID PROJECT				