## If you plan to submit a bid directly to the Department of Transportation

## PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later that 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

## **REQUESTS FOR AUTHORIZATION TO BID**

Contractors downloading and/or ordering CD-ROM's and are wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) and the ORIGINAL, signed and notarized, "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

## WHO CAN BID ?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID? When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form** will indicate the reason for denial.

**ABOUT AUTHORIZATION TO BID:** Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

**ADDENDA AND REVISIONS:** It is the contractor's responsibility to determine which, if any, addenda or revisions pertain to any project they may be bidding. Failure to incorporate all relevant addenda or revisions may cause the bid to be declared unacceptable.

Each addendum will be placed with the contract number. Addenda and revisions will also be placed on the Addendum/Revision Checklist and each subscription service subscriber will be notified by e-mail of each addendum and revision issued.

The Internet is the Department's primary way of doing business. The subscription server e-mails are an added courtesy the Department provides. It is suggested that bidder check IDOT's website <a href="http://www.dot.il.gov/desenv/delett.html">http://www.dot.il.gov/desenv/delett.html</a> before submitting final bid information.

## IDOT is not responsible for any e-mail related failures.

Addenda Questions may be directed to the Contracts Office at (217)782-7806 or D&Econtracts@dot.il.gov

Technical Questions about downloading these files may be directed to Tim Garman (217)524-1642 or garmantr@dot.il.gov.

**WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?**: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required
  - by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

**ABOUT SUBMITTING BIDS**: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

## WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	(217)782-3413
Preparation and submittal of bids	(217)782-7806
Mailing of plans and proposals	(217)782-7806
Electronic plans and proposals	(217)524-1642

## ADDENDUMS AND REVISIONS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated the addendum and/or revision prior to submitting their bid. Failure by the bidder to include an addendum could result in a bid being rejected as irregular.

Proposal Submitted By

1	5

Address

City

# Letting March 10, 2006

# NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction. (SEE INSTRUCTIONS ON THE INSIDE OF COVER)

# Notice To Bidders, Specifications, Proposal, Contract and Contract Bond



Springfield, Illinois 62764

Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 District 9 Construction Funds Route FAP 885

PLEASE MARK THE APPROPRIATE BOX BELOW:

A <u>Bid Bond</u> is included.

A Cashier's Check or a Certified Check is included.

Plans Included Herein

Prepared by	
	S
Charling hu	

Checked by Printed by authority of the State of Illinois

## INSTRUCTIONS

**ABOUT IDOT PROPOSALS**: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

**WHO CAN BID**?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction. To request authorization, a potential bidder <u>must complete and submit</u> Part B of the Request for Authorization to Bid/or Not For Bid Status form (BDE 124 INT) and submit an original Affidavit of Availability (BC 57).

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form**, they should contact the Central Bureau of Construction in advance of the letting date.

**WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED**?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

**ABOUT SUBMITTING BIDS**: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

## WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of CD-ROMS	217/782-7806



# PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

1. Proposal of \_\_\_\_\_\_

Taxpayer Identification Number (Mandatory)

for the improvement identified and advertised for bids in the Invitation for Bids as:

Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 District 9 Construction Funds

Microsilica concrete overlay on the existing bridge carrying IL Route 146 over Hosick Creek located 1 mile east of Elizabethtown.

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents shall govern performance and payments.

BD 353A (Rev. 12/2005)

- 3. ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER. The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
- 4. EXECUTION OF CONTRACT AND CONTRACT BOND. The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
- 5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

<u> </u>	Amount o	of Bid	Proposal <u>Guaranty</u>	Am	nount c	of Bid	Proposal <u>Guaranty</u>
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000	\$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000	\$150,000
\$10,000	to	\$50,000	\$1,000	\$5,000,000	to	\$7,500,000	\$250,000
\$50,000	to	\$100,000	\$3,000	\$7,500,000	to	\$10,000,000	\$400,000
\$100,000	to	\$150,000	\$5,000	\$10,000,000	to	\$15,000,000	\$500,000
\$150,000	to	\$250,000	\$7,500	\$15,000,000	to	\$20,000,000	\$600,000
\$250,000	to	\$500,000	\$12,500	\$20,000,000	to	\$25,000,000	\$700,000
\$500,000	to	\$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000	\$800,000
\$1,000,000	to	\$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000	\$900,000
\$1,500,000	to	\$2,000,000	\$75,000	over		\$35,000,000	\$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted, the proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is \_\_\_\_\_\_\$( ). If this proposal is accepted and the undersigned shall fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty shall become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond shall become void or the proposal guaranty check shall be returned to the undersigned.

Attach Cashier's Check or Certified Check Her	е

In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual proposal. If the guaranty check is placed in another proposal, state below where it may be found.

The proposal guaranty check will be found in the proposal for:

Item \_\_\_\_\_

Section No. \_\_\_\_\_

County \_\_\_\_\_

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

BD 354 (Rev. 11/2001)

6. COMBINATION BIDS. The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

## **Schedule of Combination Bids**

Combination	Combination	Combination Bid				
No.	Sections Included in Combination	Dollars	Cents			

- 7. SCHEDULE OF PRICES. The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices shall govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.
- 8. **CERTIFICATE OF AUTHORITY.** The undersigned bidder, if a business organized under the laws of another State, assures the Department that it will furnish a copy of its certificate of authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish the certificate within the time provided for execution of an awarded contract may be cause for cancellation of the award and forfeiture of the proposal guaranty to the State.

#### ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT 98938 NUMBER -

C-99-001-06 State Job # -0-00856-9012 PPS NBR -County Name -HARDIN- -Code -69 - -District -9 - -

Project Number

Route

FAP 885

Section Number -D-9 CONT. MAINT. FY 06-6

ltem Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
XZ193500	BR DK MIC C OVL 2 1/4	SQ YD	396.000				
X0321468	PLUG EX DK DRAINS	EACH	12.000				
X0323076	SIL JT SEAL 1 3/4"	FOOT	29.000				
X0323077	SILICONE JT SEAL 2.75	FOOT	29.000				
X4066418	BC SC SUPER "C" N90	TON	12.000				
X7015000	CHANGEABLE MESSAGE SN	CAL MO	2.000				
Z0006204	BR DECK HY-SCAR 1/2	SQ YD	396.000				
Z0016001	DECK SLAB REP (FD-T1)	SQ YD	0.500				
Z0016002		SQ YD	9.000				
40600100		GALLON	20.000				
	AGG PR CT	TON	1.000				
40600990		SQ YD	16.000				
42001300		SQ YD	413.000				
50300260		SQ YD	366.000				
	F & E STRUCT STEEL	POUND	430.000				

Page 1 2/7/2006

#### ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT 98938 NUMBER -

 State Job # C-99-001-06

 PPS NBR 0-00856-9012

 County Name HARDIN- 

 Code 69 - 

 District 9 - 

Project Number

Route

FAP 885

Section Number - D-9 CONT. MAINT. FY 06-6

ltem Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
67000400	ENGR FIELD OFFICE A	CAL MO	3.000				
67100100	MOBILIZATION	L SUM	1.000				
70100100	TRAF CONT-PROT 701316	EACH	1.000				
70106500	TEMP BR TRAF SIGNALS	EACH	1.000				
70300100	SHORT-TERM PAVT MKING	FOOT	15.000				
70300220	TEMP PVT MK LINE 4	FOOT	444.000				
70301000	WORK ZONE PAVT MK REM	SQ FT	107.000				
78001110	PAINT PVT MK LINE 4	FOOT	444.000				

Page 2 2/7/2006 CONTRACT NUMBER

98938

THIS IS THE TOTAL BID \$

NOTES:

- 1. Each PAY ITEM should have a UNIT PRICE and a TOTAL PRICE.
- 2. The UNIT PRICE shall govern if no TOTAL PRICE is shown or if there is a discrepancy between the product of the UNIT PRICE multiplied by the QUANTITY.
- 3. If a UNIT PRICE is omitted, the TOTAL PRICE will be divided by the QUANTITY in order to establish a UNIT PRICE.
- 4. A bid may be declared UNACCEPTABLE if neither a unit price nor a total price is shown.

## STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

## I. GENERAL

**A.** Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.

**B.** In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.

**C.** In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

## **II. ASSURANCES**

**A.** The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

## B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

#### C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

(a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.

(b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.

(e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$150,700.00. Sixty percent of the salary is \$90,420.00.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

### D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

(a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

#### E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

## F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

### G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

### H. Confidentiality

### 1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

## I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

### **III. CERTIFICATIONS**

**A.** The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

#### B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

(a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:

(1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or

(2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.

(b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:

(1) the business has been finally adjudicated not guilty; or

(2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.

(c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.

(d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

### C. Educational Loan

1. Section 3 of the Educational Loan Default Act provides:

§ 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.

2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

## D. Bid-Rigging/Bid Rotating

1. Section 33E-11 of the Criminal Code of 1961 provides:

§ 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

### E. International Anti-Boycott

1. Section 5 of the International Anti-Boycott Certification Act provides:

§ 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.

2. The bidder makes the certification set forth in Section 5 of the Act.

#### F. Drug Free Workplace

1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.

2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:

(a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.

(b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.

(c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.

(d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.

(e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.

(f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.

(g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

## G. Debt Delinquency

1. The Illinois Procurement Code provides:

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder certifies that it, or any affiliate, is not barred from being awarded a contract under 30 ILCS 500. Section 50-11 prohibits a person from entering into a contract with a State agency if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The contractor further acknowledges that the contracting State agency may declare the contract void if this certification is false or if the contractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

## H. Sarbanes-Oxley Act of 2002

1. The Illinois Procurement Code provides:

Section 50-60(c).

The contractor certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 for a period of five years prior to the date of the bid or contract. The contractor acknowledges that the contracting agency shall declare the contract void if this certification is false.

## I. ADDENDA

The contractor or bidder certifies that all relevant addenda have been incorporated in to this contract. Failure to do so may cause the bid to be declared unacceptable.

## J. Section 42 of the Environmental Protection Act

The contractor certifies in accordance with 30 ILCS 500/50-12 that the bidder or contractor is not barred from being awarded a contract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The contractor acknowledges that the contracting agency may declare the contract void if this certification is false.

## K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the bidder certifies that it is a participant. either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project as reported on the Construction Employee Workforce Projection (Form BC-1256) and returned with the bid is accounted for and listed.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

## TO BE RETURNED WITH BID

## **IV. DISCLOSURES**

**A.** The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

## B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. <u>Disclosure Forms</u>. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.** 

## C. Disclosure Form Instructions

## Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may sign the following certification statement indicating that the information previously submitted by the bidder is, as of the date of signature, current and accurate. The Certification must be signed and dated by a person who is authorized to execute contracts for the bidding company. Before signing this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder signs the Certification, the Bidder should proceed to Form B instructions.

## **CERTIFICATION STATEMENT**

I have determined that the Form A disclosure information previously submitted is current and accurate, and all forms are hereby incorporated by reference in this bid. Any necessary additional forms or amendments to previously submitted forms are attached to this bid.

(Bidding Company)

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date

## Form A: For bidders who have NOT previously submitted the information requested in Form A

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the <u>NOT APPLICABLE STATEMENT</u> on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

- 1. Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES \_\_\_ NO
- 2. Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$90,420.00? YES \_\_\_\_ NO\_\_\_\_
- Does anyone in your organization receive more than \$90,420.00 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES \_\_\_\_ NO \_\_\_
- 4. Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$90,420.00? YES \_\_\_\_ NO \_\_\_

(Note: Only one set of forms needs to be completed per person per bid even if a specific individual would require a yes answer to more than one question.)

A "YES" answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the bidding entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is authorized to execute contracts for your organization. **Photocopied or stamped signatures are not acceptable**. The person signing can be, but does not have to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.

If the answer to each of the above questions is "NO", then the <u>NOT APPLICABLE STATEMENT</u> on page 2 of Form A must be signed and dated by a person that is authorized to execute contracts for your company.

Form B: Identifying Other Contracts & Procurement Related Information Disclosure Form B must be completed for each bid submitted by the bidding entity. It must be signed by an individual who is authorized to execute contracts for the bidding entity. Note: Signing the <u>NOT</u> <u>APPLICABLE STATEMENT</u> on Form A <u>does not</u> allow the bidder to ignore Form B. Form B must be completed, signed and dated or the bidder may be considered nonresponsive and the bid will not be accepted.

The Bidder shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the signature box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:

Option I: If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an attached sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts and are not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development Board must be included. Bidders who submit Affidavits of Availability are suggested to use Option II.

Option II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type "See Affidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the Affidavit of Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.

## D. Bidders Submitting More Than One Bid

Bidders submitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. Please indicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms by reference.

The bid submitted for letting item \_\_\_\_\_ contains the Form A disclosures or Certification Statement and the Form B disclosures. The following letting items incorporate the said forms by reference:

## **RETURN WITH BID/OFFER**

# ILLINOIS DEPARTMENT OF TRANSPORTATION

## Form A Financial Information & Potential Conflicts of Interest Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)
(30 ILCS 500). Vendors desiring t and potential conflict of interest inf the publicly available contract file.	o enter into a contract with the Sta ormation as specified in this Discl This Form A must be complete ded company may submit a 1	the Section 50-35 of the Illinois Procurement Code ate of Illinois must disclose the financial information osure Form. This information shall become part of d for bids in excess of \$10,000, and for all open- IOK disclosure (or equivalent if applicable) in sure Form Instructions.
	DISCLOSURE OF FINANCIAL	
terms of ownership or distributive \$90,420.00 (60% of the Governor	income share in excess of 5%, or	elow has an interest in the BIDDER (or its parent) in an interest which has a value of more than bies of this form as necessary and attach a requirements)
FOR INDIVIDUAL (type or prin		
NAME:		
ADDRESS		
Type of ownership/distribu	table income share:	
stock sole pro % or \$ value of ownership/dis	pprietorship Partnersh stributable income share:	hip other: (explain on separate sheet):

**2. Disclosure of Potential Conflicts of Interest.** Check "Yes" or "No" to indicate which, if any, of the following potential conflict of interest relationships apply. If the answer to any question is "Yes", please attach additional pages and describe.

(a) State employment, currently or in the previous 3 years, including contractual employment of services. Yes \_\_\_No \_\_\_

If your answer is yes, please answer each of the following questions.

- 1. Are you currently an officer or employee of either the Capitol Development Board or the Illinois Toll Highway Authority? Yes \_\_\_\_No \_\_\_
- Are you currently appointed to or employed by any agency of the State of Illinois? If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name the State agency for which you are employed and your annual salary.

## **RETURN WITH BID/OFFER**

- If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes \_\_\_\_No \_\_\_
- 4. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or minor children entitled to receive (i) more than 15 % in the aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor? Yes \_\_\_\_No \_\_\_
- (b) State employment of spouse, father, mother, son, or daughter, including contractual employment services in the previous 2 years.

Yes <u>No</u>

If your answer is yes, please answer each of the following questions.

- 1. Is your spouse or any minor children currently an officer or employee of the Capitol Development Board or the Illinois Toll Highway Authority? Yes \_\_\_\_No \_\_\_
- 2. Is your spouse or any minor children currently appointed to or employed by any agency of the State of Illinois? If your spouse or minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60 % of the Governor's salary as of 7/1/01) provide the name of your spouse and/or minor children, the name of the State agency for which he/she is employed and his/her annual salary.
- 3. If your spouse or any minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the salary of the Governor as of 7/1/01) are you entitled to receive (i) more then 71/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes No \_\_\_
- 4. If your spouse or any minor children are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or minor children entitled to receive (i) more than 15% in the aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor?

Yes No

(c) Elective status; the holding of elective office of the State of Illinois, the government of the United States, any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois currently or in the previous 3 years.
Yes \_\_\_\_No \_\_\_

(d) Relationship to anyone holding elective office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes \_\_\_\_No \_\_\_

- (e) Appointive office; the holding of any appointive government office of the State of Illinois, the United States of America, or any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois, which office entitles the holder to compensation in excess of the expenses incurred in the discharge of that office currently or in the previous 3 years. Yes \_\_\_\_No \_\_\_
- (f) Relationship to anyone holding appointive office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes <u>No</u>

(g) Employment, currently or in the previous 3 years, as or by any registered lobbyist of the State government. Yes \_\_\_\_No \_\_\_

## **RETURN WITH BID/OFFER**

- (h) Relationship to anyone who is or was a registered lobbyist in the previous 2 years; spouse, father, mother, son, or daughter. Yes \_\_\_\_No \_\_\_
- (i) Compensated employment, currently or in the previous 3 years, by any registered election or reelection committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes No
- (j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a compensated employee in the last 2 years by any registered election or re-election committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections.

Yes No \_\_\_\_

## APPLICABLE STATEMENT This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on previous page. Completed by: Name of Authorized Representative (type or print) Completed by: Title of Authorized Representative (type or print) Completed by: Signature of Individual or Authorized Representative Date NOT APPLICABLE STATEMENT I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A. This Disclosure Form A is submitted on behalf of the CONTRACTOR listed on the previous page. Name of Authorized Representative (type or print) Title of Authorized Representative (type or print) Signature of Authorized Representative Date

## ILLINOIS DEPARTMENT OF TRANSPORTATION

## Form B Other Contracts & Procurement Related Information Disclosure

Contractor Name		
Legal Address		
City State Zin		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)

Disclosure of the information contained in this Form is required by the Section 50-35 of the Illinois Procurement Act (30 ILCS 500). This information shall become part of the publicly available contract file. This Form B must be completed for bids in excess of \$10,000, and for all open-ended contracts.

## DISCLOSURE OF OTHER CONTRACTS AND PROCUREMENT RELATED INFORMATION

1. Identifying Other Contracts & Procurement Related Information. The BIDDER shall identify whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other State of Illinois agency: Yes No

If "No" is checked, the bidder only needs to complete the signature box on the bottom of this page.

**2.** If "Yes" is checked. Identify each such relationship by showing State of Illinois agency name and other descriptive information such as bid or project number (attach additional pages as necessary). SEE DISCLOSURE FORM INSTRUCTIONS:

## THE FOLLOWING STATEMENT MUST BE SIGNED

Name of Authorized Representative (type or prin	nt)
 Title of Authorized Representative (type or prin	t)
 Signature of Authorized Representative	

## SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

## **CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION**

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.



## Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 District 9 Construction Funds

## PART I. IDENTIFICATION

Dept. Human Rights #\_\_\_

\_\_\_\_\_ Duration of Project: \_\_\_

Name of Bidder:

## PART II. WORKFORCE PROJECTION

A. The undersigned bidder has analyzed minority group and female populations, unemployment rates and availability of workers for the location in which this contract work is to be performed, and for the locations from which the bidder recruits employees, and hereby submits the following workforce projection including a projection for minority and female employee utilization in all job categories in the workforce to be allocated to this contract: TABLE A TABLE B

TOTAL Workforce Projection for Contract									(	URRENT		IPLOYEE	S					
							TO BE ASSIGNED											
				MIN	ORITY I	EMPLO			TRAINEES				TO CONTRACT					
JOB		TAL						THER	APP			HE JOB			TAL			DRITY
CATEGORIES		OYEES		ACK	HISP			NOR.	TIC	-		INEES		EMPLOYEES			EMPLOYEES	
	М	F	Μ	F	М	F	M	F	M	F	М	F		Μ	F		M	F
OFFICIALS																		
(MANAGERS)																		
SUPERVISORS																		
FOREMEN																		
CLERICAL																		
EQUIPMENT													ľ					
OPERATORS																		
MECHANICS																	-	
TRUCK DRIVERS																		
IRONWORKERS																		
CARPENTERS																		
CEMENT MASONS																		
ELECTRICIANS																		
PIPEFITTERS,																		
PLUMBERS																		
PAINTERS																		
LABORERS,			<u> </u>					1										<u> </u>
SEMI-SKILLED																		
LABORERS, UNSKILLED																		
TOTAL																		

## TABLE C

TOTAL Training Projection for Contract								
EMPLOYEES IN	-	TAL DYEES	BLA	ACK	HISP	ANIC		HER IOR.
TRAINING	М	F	М	F	М	F	Μ	F
APPRENTICES								
ON THE JOB TRAINEES								

\*Other minorities are defined as Asians (A) or Native Americans (N).

Please specify race of each employee shown in Other Minorities column.

Note: See instructions on the next page

FOR DEPARTMENT USE ONLY

BC 1256 - Pg 1 (Rev. 3/98) IL 494-0454

Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 **District 9 Construction Funds** 

## PART II. WORKFORCE PROJECTION - continued

B. Included in "Total Employees" under Table A is the total number of new hires that would be employed in the event the undersigned bidder is awarded this contract.

The undersigned bidder projects that: (number) \_\_\_\_ \_\_\_ new hires would be recruited from the area in which the contract project is located; and/or (number) new hires would be recruited from the area in which the bidder's principal office or base of operation is located.

C. Included in "Total Employees" under Table A is a projection of numbers of persons to be employed directly by the undersigned bidder as well as a projection of numbers of persons to be employed by subcontractors.

The undersigned bidder estimates that (number) persons will be directly employed by the prime contractor and that (number) \_\_\_\_\_\_ persons will be employed by subcontractors.

## PART III. AFFIRMATIVE ACTION PLAN

- A. The undersigned bidder understands and agrees that in the event the foregoing minority and female employee utilization projection included under PART II is determined to be an underutilization of minority persons or women in any job category, and in the event that the undersigned bidder is awarded this contract, he/she will, prior to commencement of work, develop and submit a written Affirmative Action Plan including a specific timetable (geared to the completion stages of the contract) whereby deficiencies in minority and/or female employee utilization are corrected. Such Affirmative Action Plan will be subject to approval by the contracting agency and the Department of Human Rights.
- B. The undersigned bidder understands and agrees that the minority and female employee utilization projection submitted herein, and the goals and timetable included under an Affirmative Action Plan if required, are deemed to be part of the contract specifications.

Company \_\_\_\_\_

Address

## NOTICE REGARDING SIGNATURE

The Bidder's signature on the Proposal Signature Sheet will constitute the signing of this form. The following signature block needs to be completed only if revisions are required.

Signature: \_\_\_

\_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_

Telephone Number \_\_\_\_\_

All tables must include subcontractor personnel in addition to prime contractor personnel. Instructions:

- Table A -Include both the number of employees that would be hired to perform the contract work and the total number currently employed (Table B) that will be allocated to contract work, and include all apprentices and on-the-job trainees. The "Total Employees" column should include all employees including all minorities, apprentices and on-the-job trainees to be employed on the contract work.
- Include all employees currently employed that will be allocated to the contract work including any apprentices and on-the-job trainees Table B currently employed.
- Table C -Indicate the racial breakdown of the total apprentices and on-the-job trainees shown in Table A.

BC-1256-Pg. 2 (Rev. 3/98)

## Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 District 9 Construction Funds

## PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

	Firm Name	
(IF AN INDIVIDUAL)		
	Firm Name	
(IF A CO-PARTNERSHIP)		
		Name and Address of All Members of the Firm:
-		
_		
	Ву	Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
(IF A CORPORATION)	Attest	
(IF A JOINT VENTURE, USE THIS SECTION FOR THE MANAGING PARTY AND THE		Signature
SECOND PARTY SHOULD SIGN BELOW)	Business Address	
	Corporate Name	
	Ву	
		Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
(IF A JOINT VENTURE)	Attest	
		Signature
	Business Address	
If more than two parties are in the joint venture	e, please attach an ac	dditional signature sheet.





**Division of Highways Proposal Bid Bond** (Effective November 1, 1992)

Item No.

Letting Date

KNOW ALL MEN BY THESE PRESENTS, That We

as PRINCIPAL, and

as SURETY, are

held jointly, severally and firmly bound unto the STATE OF ILLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in Article 102.09 of the "Standard Specifications for Road and Bridge Construction" in effect on the date of invitation for bids, whichever is the lesser sum, well and truly to be paid unto said STATE OF ILLINOIS, for the payment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.

THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH, That Whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF ILLINOIS, acting through the Department of Transportation, for the improvement designated by the Transportation Bulletin Item Number and Letting Date indicated above.

NOW, THEREFORE, if the Department shall accept the bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in the bidding and contract documents, submit a DBE Utilization Plan that is accepted and approved by the Department; and if, after award by the Department, the PRINCIPAL shall enter into a contract in accordance with the terms of the bidding and contract documents including evidence of the required insurance coverages and providing such bond as specified with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof; or if, in the event of the failure of the PRINCIPAL to make the required DBE submission or to enter into such contract and to give the specified bond, the PRINCIPAL pays to the Department the difference not to exceed the penalty hereof between the amount specified in the bid proposal and such larger amount for which the Department may contract with another party to perform the work covered by said bid proposal, then this obligation shall be null and void, otherwise, it shall remain in full force and effect.

IN THE EVENT the Department determines the PRINCIPAL has failed to comply with any requirement as set forth in the preceding paragraph, then Surety shall pay the penal sum to the Department within fifteen (15) days of written demand therefor. If Surety does not make full payment within such period of time, the Department may bring an action to collect the amount owed. Surety is liable to the Department for all its expenses, including attorney's fees, incurred in any litigation in which it prevails either in whole or in part.

In TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this \_\_\_\_\_ day of \_\_\_\_\_\_ A.D., \_\_\_\_\_

PRINCIPAL	SURETY
(Company Name)	(Company Name)
By:	By:
(Signature & Title)	(Signature of Attorney-in-Fact)
STATE OF ILLINOIS, COUNTY OF	Notary Certification for Principal and Surety
I,	, a Notary Public in and for said County, do hereby certify that
	and
(Insert names	of individuals signing on behalf of PRINCIPAL & SURETY)
	ame persons whose names are subscribed to the foregoing instrument on behalf of nis day in person and acknowledged respectively, that they signed and delivered said uses and purposes therein set forth.
Given under my hand and notarial seal this	day of, A.D
Mar annuississe anning	
My commission expires	

In lieu of completing the above section of the Proposal Bid Form, the Principal may file an Electronic Bid Bond. By signing below the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the State of Illinois under the conditions of the bid bond as shown above.

Electronic Bid Bond ID#

# PROPOSAL ENVELOPE



# PROPOSALS

for construction work advertised for bids by the Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

lame:	
Address:	
Phone No.	

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 326 Illinois Department of Transportation 2300 South Dirksen Parkway Springfield, Illinois 62764

## **NOTICE**

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

# **CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS**

# NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 District 9 Construction Funds





## **NOTICE TO BIDDERS**

- 1. TIME AND PLACE OF OPENING BIDS. Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., March 10, 2006. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.
- 2. DESCRIPTION OF WORK. The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

Contract No. 98938 HARDIN County Section D-9 CONT. MAINT. FY06-6 Route FAP 885 District 9 Construction Funds

Microsilica concrete overlay on the existing bridge carrying IL Route 146 over Hosick Creek located 1 mile east of Elizabethtown.

- 3. INSTRUCTIONS TO BIDDERS. (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.
  - (b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the Illinois Department of Transportation

Timothy W. Martin, Secretary

BD 351 (Rev. 01/2003)

# INDEX FOR

# SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

## Adopted March 1, 2005

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-02) (Revised 3-1-05)

## SUPPLEMENTAL SPECIFICATIONS

105       Control of Work         265       Embankment         276       Mulch         278       Filter Fabric for Use With Riprap         278       Filter Fabric for Use With Riprap         278       Concrete Reventment Mats         279       Aggregate Base Course         270       Aggregate Base Course         271       Granular Subbase         272       Pavement Patching         273       Pavement Patching         274       Removal and Replacement of Preformed Elastomeric Compression Joint Seal         274       Removal and Replacement of Preformed Elastomeric Compression Joint Seal         274       Removal of Existing Structures         2750       Steel Structures         2760       Cleaning and Painting Metal Structures         2761       Piling         2861       Steel Structures         2962       Elastic Joint Sealer         207       Piling         218       Pilastic Joint Sealer         229       Elastic Joint Sealer         230       Stould Structures         241       Box Culverts         252       Elastic Joint Sealer         253       Steel Structures         244	Std. Spe		Page No.
205       Embankment         216       Mulch         217       Mulch         218       Filter Fabric for Use With Riprap         219       Filter Fabric for Use With Riprap         211       Granular Subbase       1         214       Pavement Patching       1         217       Pavement Patching       1         218       Removal of Existing Structures       2         220       Concrete Structures       2         220       Catch Basin, Manhole, Iniet, Drainage Structures and Valve Vault       2         220       Bac Culverts       2         230       Box Culverts       2         241       Box Culverts       2         252       Piling       3         331       Shoulder Inlets with Outh       3         332       Shoulder Inlets with Outh       3         333       Shoulder Inlets with Outh       3         344       Hyreanes and Grates of Drainage and Utility Structures       3         345       Hyreanes and Grates of Drainage and Utility Structu	101	Definition of Terms	1
251       Mulch         282       Filter Fabric for Use With Rigrap.         283       Concrete Revetment Mats.         1       Granular Subbase         11       Granular Subbase         12       Aggregate Base Course         14       Removal of Existing Pavement and Appurtenances.         141       Removal and Replacement of Preformed Elastomeric Compression Joint Seal         143       Aggregate Shoulders         144       Removal of Existing Structures         150       Concrete Structures         151       Removal of Existing Structures         152       Stele Structures         153       Concrete Structures         154       Reinforcement Bars         155       Stele Structures         156       Cleaning and Painting Metal Structures and Valve Vault         151       Construction, Adjustiment and Reconstruction.         152       Elastic Joint Sealer         153       Elastic Joint Sealer         154       Basting Marhole, Inlet, Drainage Structures and Valve Vault         155       Construction, Adjustiment and Reconstruction.       3         155       Reinforcement Bars       3         155       Stone, Concrete Structures       3	105	Control of Work	. 2
281       Filter Fabric for Use With Riprap.         282       Filter Fabric for Use With Riprap.         283       Concrete Revetment Mats.         11       Granular Subbase         284       Removal of Existing Pavement and Appurtenances.         440       Removal and Replacement of Preformed Elastomeric Compression Joint Seal         441       Aggregate Shoulders.         285       Concrete Structures.         286       Cleaning and Painting Metal Structures.         287       Cleaning and Painting Metal Structures.         288       Elastic Joint Sealer         290       Construction, Adjustment and Reconstruction         291       Box Culverts.         292       Basin, Manhole, Inlet, Drainage Structures and Valve Vault         293       Construction, Adjustment and Reconstruction         294       Box Culverts       3         295       Stoulder Inlets with Curb       3         296       Shoulder Inlets with Curb       3         297       Box Culverts       3         298       Removal and Disposal of Regulated Substances       3         290       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       3         2904       Concrete Radgregate       3       3 </td <td>205</td> <td>Embankment</td> <td> 3</td>	205	Embankment	3
282       Filter Fabric for Use With Rigrap.         285       Concrete Revertment Mats.         311       Granular Subbase         351       Aggregate Base Course.         440       Removal of Existing Pavement and Appurtenances.         441       Removal of Existing Pavement and Appurtenances.         442       Pavement Patching         443       Removal of Existing Pavement and Appurtenances.         444       Removal of Existing Structures.         503       Concrete Structures         504       Concrete Structures         505       Steel Structures         506       Cleaning and Painting Metal Structures         507       Steel Structures         508       Culverts         509       Elastic Joint Sealer         600       Catch Basin, Marhole, Inlet, Drainage Structures and Valve Vault         Construction, Adjustiment and Reconstruction       3         601       Shoulder Inlets with Curb       3         602       Reinforcoment Base       3         603       Shoulder Inlets with Curb       3         604       Rock Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Koare Aggregate	251	Mulch	
282       Filter Fabric for Use With Riprap.         285       Concrete Revertment Mats.       1         311       Granular Subbase.       1         442       Pavement Patching       1         443       Removal of Existing Pavement and Appurtenances.       1         444       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         447       Removal of Existing Structures       2         503       Concrete Structures       2         504       Concrete Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Concrete Structures       2         508       Reinforcement Bars       2         509       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vautt       2         509       Construction, Adjustment and Reconstruction       3         600       Adjusting Frames and Grates of Drainage and Uillity Structures       3         601       Shoulder hiets with Curb       3         602       Catch Basin, Manhole, Inlet, Orainage Structures       3         603       Shoulder hiets with Curb       3         604       Mobilization       3	281	Riprap	
285       Concrete Revetment Mats       1         311       Granular Subbase       1         341       Granular Subbase       1         440       Removal of Existing Pavement and Appurtenances       1         441       Represent Patching       1         442       Pavement Patching       1         444       Pavement Patching       1         445       Steel Structures       2         503       Concrele Structures       2         504       Box Gulverts       2         512       Piling       2         524       Box Gulverts       2         535       Box Gulverts       2         546       Box Gulverts       3         657       Mobilizing Frames and Grates of Drainage and Uility Structures       3         668       Work Zone T	282		
311       Granular Subbase       1         351       Aggregate Base Course       1         440       Removal of Existing Pavement and Appurtenances       1         441       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         442       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         443       Removal of Existing Structures       2         503       Concrete Structures       2         504       Cleaning and Painting Metal Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Bits Colint Sealer       2         508       Elastic Joint Sealer       2         509       Elastic Joint Sealer       3         602       Catch Basin, Manhole, Intel, Drainage Structures and Valve Vault       3         610       Shoulder Inlets with Curb       3         621       Work Wire Fence       3         632       Removal and Disposal of Regulated Substances       3         633       Groches And Disposal of Regulated Substances       3         640       Work Zone Traffic Control Devices       3         703 <t< td=""><td>285</td><td></td><td></td></t<>	285		
351       Aggregate Base Course       1         440       Removal of Existing Pavement and Appurtenances       1         441       Removal of Existing Pavement of Preformed Elastomeric Compression Joint Seal       1         441       Aggregate Shoulders       1         501       Removal of Existing Structures       2         503       Concrete Structures       2         504       Breinforcement Bars       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Box Culverts       2         508       Reinforcement Bars       2         509       Elastic Joint Sealer       2         500       Construction, Adjustment and Reconstruction       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Removal and Disposal of Regulated Substances       3         605       Woven Wire Fence       3         606       Removal and Disposal of Regulated Substances       3         701       Mobilization       3         702       Work Zone Trafic Control Dev	311		
440       Removal of Existing Pavement and Appurtenances       1         442       Pavement Patching       1         443       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         449       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         450       Steenval of Existing Structures       2         503       Concrete Structures       2         504       Cleaning and Painting Metal Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Box Culverts       2         508       Reinforcement Bars       2         509       Elastic Joint Sealer       2         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Nonsulter Intels with Curb       3         605       Wore Wire Fence       3         6069       Removal and Disposal of Regulated Substances       3         610       Structures       3         610       Structures       3         610       Structures			
442       Pavement Patching       1         449       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         441       Aggregate Shoulders       2         501       Removal of Existing Structures       2         503       Concrete Structures       2         504       Elasting and Painting Metal Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Piling       2         508       Reinforcement Bars       2         509       Elastic Joint Sealer       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       2         Construction, Adjustment and Reconstruction       3       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         610       Shoulder Inlets with Curb       3         621       Woor Wire Fence       3         632       Woor Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control			
449       Removal and Replacement of Preformed Elastomeric Compression Joint Seal       1         481       Aggregate Shoulders       1         481       Aggregate Shoulders       2         503       Concrete Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Box Culverts       2         508       Elastic Joint Sealer       2         509       Elastic Joint Sealer       3         600       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         601       Shoulder Inlets with Curb       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         610       Shoulder Inlets with Curb       3         620       Work Zone Traffic Control Devices       3         702       Work Zone Traffic Control Devices       3         703       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         704       Metals       4         705       Stone, Concrete Markutres       5         702       Concrete Adgregate       3         703       Gottres Adgregate			
481       Aggregate Shoulders       1         501       Removal of Existing Structures       2         503       Concrete Structures       2         504       Steel Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Reinforcement Bars       2         508       Reinforcement Bars       2         509       Elastic Joint Sealer       2         500       Cleaning and Painting Metal Structures and Valve Vault       3         501       Construction, Adjustment and Reconstruction       3         503       Adjusting Frames and Grates of Drainage and Utility Structures       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Woven Wire Fence       3         605       Woven Wire Fence       3         704       Kot Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Concrete       5 <td< td=""><td></td><td></td><td></td></td<>			
501       Removal of Existing Structures       2         503       Concrete Structures       2         504       Cleaning and Painting Metal Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Steel Structures       2         508       Reinforcement Bars       2         512       Pling       2         540       Box Culverts       2         541       Box Culverts       3         652       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         663       Adjusting Frames and Grates of Drainage and Utility Structures       3         664       Woven Wire Fence       3         665       Woven Wire Fence       3         666       Removal and Disposal of Regulated Substances       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregate       3         704       Carse Aggregate       3         705       Stome, Concrete Blocks and Broken Concrete for Erosion Protection,       4         7060       Metals       4         7071       Timber and Preservative Treatment<			
503       Concrete Structures       2         505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         508       Reinforcement Bars       2         512       Piling       2         520       Cleaning and Painting Metal Structures       2         521       Piling       2         526       Box Culverts       2         589       Elastic Joint Sealer       2         500       Construction, Adjustment and Reconstruction       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         605       Wore Wire Fence       3         606       Removal and Disposal of Regulated Substances       3         607       Work Zorne Traffic Control Devices       3         702       Work Zorne Traffic Control Devices       3         703       Koiner Tothor and Rockfill       4         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       5         704       Morear And Preservative Treatment       4         705       Portland Cement Concrete       5         7060       Portl			
505       Steel Structures       2         506       Cleaning and Painting Metal Structures       2         507       Piling       2         518       Pilenforcement Bars       2         540       Box Culverts       2         541       Box Culverts       2         542       Bastic Joint Sealer       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Shoulder Inlets with Curb       3         605       Wore Wire Fence       3         606       Work Zone Traffic Control Devices       3         701       Mobilization       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       4         706       Metals       4         707       Timber and Preservative Treatment       4         708       Petaret Uine       5         7092       Concrete Admixtures       5			
506       Cleaning and Painting Metal Structures       2         508       Reinforcement Bars       2         509       Box Culverts       2         540       Box Culverts       2         540       Box Culverts       2         541       Piling       2         542       Piling       2         543       Elastic Joint Sealer       3         544       Construction, Adjustment and Reconstruction       3         545       Shoulder Inlets with Curb       3         546       Woven Wire Fence       3         547       Mobilization       3         548       Fine Aggregates       3         549       Reinval and Disposal of Regulated Substances       3         540       Rowen Wire Fence       3         541       Mobilization       3         542       Woven Wire Fence       3         543       Fine Aggregates       3         544       Coarse Aggregate       3         545       Rein Control and Rockfill       4         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       5         540       Concrete Admixtures       5       5			
508       Reinforcement Bars       2         512       Piling       2         540       Box Culverts       2         589       Elastic Joint Sealer       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         603       Shoulder Inlets with Curb       3         605       Woven Wire Fence       3         606       Woven Zone Traffic Control Devices       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Koarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       3         706       Metals       4         707       Timber and Preservative Treatment       4         7012       Portland Cement Concrete       5         702       Portland Cement Concrete       5         703       Portland Cement Concrete       5         704       Concrete Admixtures       5         705       Portland Cement Concrete       5         706       Preformed Flexible Gaskets and Mas			
512       Piling       2         540       Box Culverts       2         541       Box Culverts       2         542       Elastic Joint Sealer       3         543       Elastic Joint Sealer       3         544       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         545       Catch Basin, Manhole, Inlet, Drainage and Utility Structures       3         546       Shoulder Inlets with Curb       3         547       Mobilization       3         548       Flagstand Disposal of Regulated Substances       3         549       Work Zone Traffic Control Devices       3         540       Coarse Aggregate       3         5404       Coarse Aggregate       3         5405       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1007       Timber and Preservative Treatment       4         1017       Timber and Preservative Treatment       4         1021       Concrete Admixtures       5         1022       Portland Cement Concrete       5         1032       Noshrink Grout       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings <t< td=""><td></td><td></td><td></td></t<>			
540       Box Čulverts.       2         569       Elastic Joint Sealer       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Woven Wire Fence       3         605       Woven Wire Fence       3         606       Removal and Disposal of Regulated Substances       3         607       Kobilization       3         702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1021       Portland Cement Concrete       5         1022       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Nonshrink Grout       6         1031       Brick       6      <			
589       Elastic Joint Sealer       3         602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         604       Shoulder Inlets with Curb       3         605       Woven Wire Fence       3         606       Woven Wire Fence       3         607       Mobilization       3         708       Fine Aggregates       3         709       Kork Zone Traffic Control Devices       3         7000       Kork Zone Traffic Control Devices       3         7003       Fine Aggregates       3         7004       Coarse Aggregate       3         7005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       4         7007       Imber and Preservative Treatment       4         7010       Hydrated Lime       5         7021       Portland Cement Concrete       5         7022       Concrete Admixtures       5         7023       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       5         7024       Nonshrink Grout       6         7035       Precast Reinforced Concrete Manhole Sections and Adjusting Rings		•	
602       Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault       3         Construction, Adjustment and Reconstruction       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         610       Shoulder Inlets with Curb       3         626       Woven Wire Fence       3         637       Mobilization       3         648       Removal and Disposal of Regulated Substances       3         659       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregate       3         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         706       Metals       4         707       Timber and Preservative Treatment       4         7010       Timber and Preservative Treatment       4         7020       Portland Cement Concrete       5         7021       Concrete Admixtures       5         7022       Concrete Curing Materials       6         7034       Noshrink Grout       6			
Construction, Adjustment and Reconstruction       3         603       Adjusting Frames and Grates of Drainage and Utility Structures       3         610       Shoulder Inlets with Curb       3         650       Woven Wire Fence       3         661       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Portland Cement Concrete       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1059       Elastic Joint Sea			30
603       Adjusting Frames and Grates of Drainage and Utility Structures       3         610       Shoulder Inlets with Curb       3         665       Woven Wire Fence       3         669       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection,       3         706       Metals       4         707       Timber and Preservative Treatment       4         701       Motard Line       5         702       Portland Cement Concrete       5         703       Concrete Admixtures       5         704       Hydrated Line       5         705       Concrete Curing Materials       5         702       Concrete Concrete       5         703       Firekare       6         704       Brick       6         705       Portland Cement Concrete       5         7024       Nonshrink Grout       6         705       Precoart Reinfo	602		
610       Shoulder Inlets with Curb       3         665       Woven Wire Fence       3         669       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         703       Fine Aggregates       3         704       Coarse Aggregate       3         705       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         700       Imber and Preservative Treatment       4         701       Hydrated Lime       5         702       Portland Cement Concrete       5         702       Concrete Admixtures       5         702       Concrete Admixtures       5         702       Concrete Manhole Sections and Adjusting Rings       6         704       Brick       6         705       Elastic Joint Sealers       6         706       Waterprofing Materials       6         707       Post and Foundation       7         708       Pole and Tower       6         709       Fabric Materials       7         707       Post and Foundation       7 <td< td=""><td></td><td></td><td></td></td<>			
665       Woven Wire Fence       3         665       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1007       Timber and Preservative Treatment       4         1007       Timber and Preservative Treatment       4         1012       Portland Cement Concrete       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Admixtures       5         1023       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1044       Brick       6         1055       Elastic Joint Sealers       6         1066       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1056       Preformed Flexible Gaskets and Mastic Jo			
669       Removal and Disposal of Regulated Substances       3         671       Mobilization       3         702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Curing Materials       5         1023       Nonshrink Grout       6         1044       Brick       6         1055       Elastic Joint Sealers       6         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1057       Foundation and Breakaway Devices       7         1058       Fabric Materials       7         1069       Pole and Tou			
671       Mobilization       3         702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Curing Materials       5         1023       Nonshrink Grout       6         1044       Brick       6         1045       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1054       Nonshrink Grout       6         1055       Elastic Joint Sealers       6         1054       Precost Reinforced Concrete Manhole Sections and Adjusting Rings       6         1055       Elastic Joint Sealers <td></td> <td></td> <td></td>			
702       Work Zone Traffic Control Devices       3         1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1060       Pole and Tower       6         1070       Foundation and Breakaway Devices       7         1071       Post and Foundation       7         1081       Materials For Plant		Removal and Disposal of Regulated Substances	
1003       Fine Aggregates       3         1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Admixtures       5         1024       Nonshrink Grout       6         1041       Brick       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1060       Pole and Tower       6         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Fabric Materials       7         1082       Fabric Materials       7         1083       Elastomeric Bearings       7 <td>671</td> <td>Mobilization</td> <td> 36</td>	671	Mobilization	36
1004       Coarse Aggregate       3         1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       5         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Admixtures       5         1023       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1041       Brick       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1060       Waterproofing Materials       6         1070       Foundation and Breakaway Devices       7         1071       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083	702	Work Zone Traffic Control Devices	37
1005       Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control and Rockfill       4         1006       Metals       4         1007       Timber and Preservative Treatment       4         1012       Hydrated Lime       4         1020       Portland Cement Concrete       5         1021       Concrete Admixtures       5         1022       Concrete Curing Materials       5         1023       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1069       Pole and Tower       6         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1003	Fine Aggregates	38
Sediment Control and Rockfill41006Metals41007Timber and Preservative Treatment41012Hydrated Lime51020Portland Cement Concrete51021Concrete Admixtures51022Concrete Curing Materials51024Nonshrink Grout61041Brick61043Precast Reinforced Concrete Manhole Sections and Adjusting Rings61056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe61060Waterproofing Materials61070Foundation and Breakaway Devices71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7	1004	Coarse Aggregate	39
1006Metals41007Timber and Preservative Treatment41012Hydrated Lime51020Portland Cement Concrete51021Concrete Admixtures51022Concrete Curing Materials51024Nonshrink Grout61041Brick61043Precast Reinforced Concrete Manhole Sections and Adjusting Rings61056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe61059Elastic Joint Sealers61060Waterproofing Materials61070Foundation and Breakaway Devices71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7	1005		
1007Timber and Preservative Treatment41012Hydrated Lime51020Portland Cement Concrete51021Concrete Admixtures51022Concrete Curing Materials51024Nonshrink Grout61041Brick61043Precast Reinforced Concrete Manhole Sections and Adjusting Rings61059Elastic Joint Sealers61060Waterproofing Materials61070Foundation and Breakaway Devices71077Post and Foundation71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7			
1012Hydrated Lime551020Portland Cement Concrete551021Concrete Admixtures551022Concrete Curing Materials551024Nonshrink Grout661041Brick661043Precast Reinforced Concrete Manhole Sections and Adjusting Rings661056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe661059Elastic Joint Sealers661060Waterproofing Materials661070Foundation and Breakaway Devices771077Post and Foundation771080Fabric Materials771081Materials For Planting771083Elastomeric Bearings77			
1020       Portland Cement Concrete       55         1021       Concrete Admixtures       55         1022       Concrete Curing Materials       55         1024       Nonshrink Grout       66         1041       Brick       66         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       66         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       66         1059       Elastic Joint Sealers       66         1060       Waterproofing Materials       66         1069       Pole and Tower       66         1070       Foundation and Breakaway Devices       7         1070       Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7			
1021       Concrete Admixtures       55         1022       Concrete Curing Materials       55         1024       Nonshrink Grout       66         1041       Brick       66         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       66         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       66         1059       Elastic Joint Sealers       66         1060       Waterproofing Materials       66         1069       Pole and Tower       66         1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7			
1022       Concrete Curing Materials       5         1024       Nonshrink Grout       6         1041       Brick       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1069       Pole and Tower       6         1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1020	Portland Cement Concrete	51
1024       Nonshrink Grout       6         1041       Brick       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1043       Precast Reinforced Concrete Manhole Sections and Adjusting Rings       6         1056       Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe       6         1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1069       Pole and Tower       6         1070       Foundation and Breakaway Devices       6         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1021	Concrete Admixtures	58
1041Brick61043Precast Reinforced Concrete Manhole Sections and Adjusting Rings61056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe61059Elastic Joint Sealers61060Waterproofing Materials61069Pole and Tower61070Foundation and Breakaway Devices71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7	1022		
1043Precast Reinforced Concrete Manhole Sections and Adjusting Rings61056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe61059Elastic Joint Sealers61060Waterproofing Materials61070Foundation and Breakaway Devices71077Post and Foundation71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7	1024	Nonshrink Grout	61
1056Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe61059Elastic Joint Sealers61060Waterproofing Materials61069Pole and Tower61070Foundation and Breakaway Devices71077Post and Foundation71080Fabric Materials71081Materials For Planting71083Elastomeric Bearings7	1041	Brick	63
1059       Elastic Joint Sealers       6         1060       Waterproofing Materials       6         1069       Pole and Tower       6         1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1043	Precast Reinforced Concrete Manhole Sections and Adjusting Rings	. 64
1060       Waterproofing Materials       6         1069       Pole and Tower       6         1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1056	Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe	. 66
1069       Pole and Tower       6         1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1059		
1070       Foundation and Breakaway Devices       7         1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1060	Waterproofing Materials	68
1077       Post and Foundation       7         1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1069	Pole and Tower	. 69
1080       Fabric Materials       7         1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1070	Foundation and Breakaway Devices	70
1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1077	Post and Foundation	. 72
1081       Materials For Planting       7         1083       Elastomeric Bearings       7	1080	Fabric Materials	73
1083 Elastomeric Bearings	1081		
5	1083		
1094 Overhead Sign Structures	1094	Overhead Sign Structures	
1103         Portland Cement Concrete Equipment         7	1103	Portland Cement Concrete Equipment	79

## F.A.P. ROUTE 885 (IL ROUTE 146) D-9 CONT. MAINT. FY06-6 HARDIN COUNTY CONTRACT 98938

## RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHECK	<u>SHEET #</u>	AGE NO.
1	State Required Contract Provisions All Federal-aid Construction Contracts (Eff. 2-1-69) (Rev. 10-1-83)	
2	Subletting of Contracts (Federal-aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93)	82
3 X	EEO (Eff. 7-21-78) (Rev. 11-18-80)	83
4 X	Specific Equal Employment Opportunity Responsibilities NonFederal-aid Contracts	
	(Eff. 3-20-69) (Rev. 1-1-94)	
5 X	Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 4-1-93)	100
6	Reserved	105
7	Asphalt Quantities and Cost Reviews (Eff. 7-1-88)	106
8	National Pollutant Discharge Elimination System Permit (Eff. 7-1-94) (Rev. 1-1-03)	107
9	Haul Road Stream Crossings, Other Temporary Stream Crossings and In-Stream Work Pads	
	(Eff. 1-2-92) (Rev. 1-1-98)	108
10	Construction Layout Stakes Except for Bridges (Eff. 1-1-99) (Rev. 1-1-02)	109
11	Construction Layout Stakes (Eff. 5-1-93) (Rev. 1-1-02)	112
12	Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-97)	115
13	Asphaltic Emulsion Slurry Seal and Fibrated Asphaltic Emulsion Slurry Seal (Eff. 8-1-89) (Rev. 2-1-97)	) 117
14	Bituminous Surface Treatments Half-Smart (Eff. 7-1-93) (Rev. 1-1-97)	
15 X		
16	Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 2-1-95)	
17	Bituminous Surface Removal (Cold Milling) (Eff. 11-1-87) (Rev. 10-15-97)	
18	Resurfacing of Milled Surfaces (Eff. 10-1-95)	
19	PCC Partial Depth Bituminous Patching (Eff. 1-1-98)	
20	Patching with Bituminous Overlay Removal (Eff. 10-1-95) (Rev. 7-1-99)	
21	Reserved	159
22	Protective Shield System (Eff. 4-1-95) (Rev. 1-1-03)	160
23	Polymer Concrete (Eff. 8-1-95) (Rev. 3-1-05)	162
24	Controlled Low-Strength Material (CLSM) (Eff. 1-1-90) (Rev. 3-1-05)	164
25	Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-98)	169
26	Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	170
27	Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-97)	175
28	Reserved	177
29	Reserved	178
30	Reserved	179
31	Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	180
32	Reserved	
33	English Substitution of Metric Bolts (Eff. 7-1-96)	182
34	English Substitution of Metric Reinforcement Bars (Eff. 4-1-96) (Rev. 1-1-03)	183
35	Polymer Modified Emulsified Asphalt (Eff. 5-15-89) (Rev. 1-1-04)	185
36	Corrosion Inhibitor (Eff. 3-1-80) (Rev. 7-1-99)	187
37	Quality Control of Concrete Mixtures at the Plant-Single A (Eff. 8-1-00) (Rev. 1-1-04)	
38	Quality Control of Concrete Mixtures at the Plant-Double A (Eff. 8-1-00) (Rev. 1-1-04)	
39	Quality Control/Quality Assurance of Concrete Mixtures (Eff. 4-1-92) (Rev. 3-1-05)	202
40 X	Traffic Barrier Terminal Type 1, Special (Eff. 8-1-94) (Rev. 1-1-03)	215
41	Reserved	
42	Segregation Control of Bituminous Concrete (Eff. 7-15-97)	217
43	Reserved	220

## F.A.P. ROUTE 885 (IL ROUTE 146) D-9 CONT. MAINT. FY06-6 HARDIN COUNTY CONTRACT 98938

## TABLE OF CONTENTS

LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
UTILITIES	1
TRAFFIC CONTROL PLAN	1
PORTABLE CHANGEABLE MESSAGE SIGNS	2
TEMPORARY PORTABLE BRIDGE TRAFFIC SIGNALS	3
PROTECTION OF TRAFFIC DURING HYDRO-SCARIFICATION	4
BRIDGE DECK HYDRO-SCARIFICATION	
AGGREGATE SHIPPING TICKETS (BDE)	4
BITUMINOUS CONCRETE SURFACE COURSE (BDE)	5
CONCRETE ADMIXTURES (BDE)	6
CURING AND PROTECTION OF CONCRETE CONSTRUCTION (BDE)	
FLAGGER VESTS (BDE)	
PARTIAL PAYMENTS (BDE)	
PAYMENTS TO SUBCONTRACTORS (BDE)	
PAYROLLS AND PAYROLL RECORDS (BDE)	
PERSONAL PROTECTIVE EQUIPMENT (BDE)	21
PORTABLE CHANGEABLE MESSAGE SIGNS (BDE)	21
PORTLAND CEMENT (BDE)	
PORTLAND CEMENT CONCRETE (BDE)	
PORTLAND CEMENT CONCRETE PATCHING (BDE)	
RAP FOR USE IN BITUMINOUS CONCRETE MIXTURES (BDE)	
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)	
SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)	
TEMPORARY PORTABLE BRIDGE TRAFFIC SIGNALS (BDE)	
TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)	
TRUCK BED RELEASE AGENT (BDE)	
WEIGHT CONTROL DEFICIENCY DEDUCTION	
WORK ZONE TRAFFIC CONTROL DEVICES (BDE)	
WORKING DAYS (BDE)	
SILICONE BRIDGE JOINT SEALER	
PLUG EXISTING DECK DRAINS	62

## STATE OF ILLINOIS

## **SPECIAL PROVISIONS**

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction," adopted January 1, 2002, the latest edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways," and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included herein which apply to and govern the construction of D-9 CONT. MAINT. FY 06-6 in Hardin County, and in case of conflict with any part or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

## LOCATION OF PROJECT

Structure 035-0011 carries IL 146 over Hosick Creek at 1 mile east of the village of Elizabethtown in Hardin County.

## DESCRIPTION OF PROJECT

The proposed work consists of construction of a microsilica overlay on structure 035-0011. The structure is 129.3 feet in length.

## UTILITIES

No utilities are attached to the structure.

Additional utility information may be obtained by calling the "Joint Utility Location Information for Excavators" phone number, 800-892-0123. This project is located in the NE quarter of Section 23 in McFarlan Township, R 8 E, T 12 E.

## TRAFFIC CONTROL PLAN

Effective 1985 Revised 2/17/99 9-107T1-97

Traffic control shall be in accordance with the applicable sections of the Standard Specifications for Road and Bridge Construction, the guidelines contained in the National Manual on Uniform Traffic Control Devices for Streets and Highways, the Supplemental Specifications, these Special Provisions, and any special details and highway standards contained herein and in the plans.

Special attention is called to Articles 107.09 and 107.14 of the Standard Specifications for Road and Bridge Construction and the following traffic control related (1) Highway Standards; (2) Supplemental Specifications and Recurring Special Provisions; and (3) Special Provisions which are included in this contract:

- 1. Standards: 701301 701311 701316 702001
- 2. Special Provisions: Flagger Vests Personal Protection Equipment Portable Changeable Message Signs Traffic Control Deficiency Deduction Work Zone Traffic Control Devices

Traffic control standards shall be applied as directed by the Engineer. Suggested applications for each standard are as follow:

<u>701301</u> This standard should be used for short time operations such as mobilization activities.

<u>701311</u> This standard should be used for moving operations such as striping.

<u>701316</u> This standard will apply during staged bridge repairs.

During the entire construction period, the road shall be kept open to traffic as follows:

(a) The highway shall be kept open to at least one lane of traffic at all times, and to two lanes of traffic to the greatest extent possible.

The temporary rumble strips shown on the Traffic Control Detail in the plans will be required on this project.

If at any time the signs are in place but not applicable, they shall be turned from the view of motorists or covered as directed by the Engineer.

## PORTABLE CHANGEABLE MESSAGE SIGNS

This work consists of furnishing, placing, and maintaining changeable message sign(s) according to BDE Special Provision Portable Changeable Message Signs and the following:

A total of 2 changeable message signs shall be required in this contract. All signs must be in place and operational for a minimum of 14 calendar days prior to lane closures. Each sign shall state the day work will begin and delays are possible. The exact message will be approved by the Engineer. The exact location of the placement of these signs shall be determined in the field by the Engineer.

The furnishing, placing, and maintaining of portable changeable message sign(s) shall be paid for per calendar month as CHANGEABLE MESSAGE SIGN.

## TEMPORARY PORTABLE BRIDGE TRAFFIC SIGNALS

This work shall be according to Sections 700, 849, and 1085 of the Standard Specifications except as modified herein.

At the Contractor's option, a portable traffic signal system may be used in place of the temporary bridge traffic signal system, during the normal construction period, provided the minimum requirements listed below are fully satisfied:

The portable traffic signals shall not be in place more than 30 working days at each bridge site. The contractor shall limit the number of portable traffic signals in operation, accordingly.

In the event the traffic signals will have to be in place from December through March regular temporary traffic signals shall be put in place.

<u>Portable Traffic Signal System Equipment Requirements</u>. All traffic signal heads shall conform to the following specifications: Federal Manual On Uniform Traffic Control Devices (MUTCD), Vehicle Traffic Control Standard (Institute of Transportation Engineers), and all applicable NEMA TS1 and TS2 Standards. All traffic portable traffic signal heads shall be 12" sections. All signal heads shall be equipped with visor and back plates. The signal arm length shall be long enough to allow a traffic signal head to be placed over the center of the lane.

All portable traffic signal systems shall have conflict monitoring to ensure that conflicting indications are not displayed. Both signals shall enter into a red flashing mode upon conflict or loss of communication between signal units.

The operating temperature of the signal system shall be between -30F to 120F.

Each portable unit shall contain a solar cell system to facilitate battery charging. There shall be a minimum of 10 hours backup reserve battery supply and the units shall be capable of operating with a 120V power supply from a generator or electrical service.

Only Horizon Model SQ5 or SQ3 with Cable Operation and Traffic Actuation (Microwave) Options, or ADDCO Model PTS-2000 with Radio Link or Cable Operation and Traffic Actuation (Microwave) Options are currently approved for use.

<u>Portable Traffic Signal System Operational Requirements</u>. The Department shall be notified 48 hours prior to turn on for timing approval and verification. A qualified vendor representative shall be on site to perform the initial set up and enter the timing parameters.

The installation shall be in accordance to Standard 701321-03 except that there shall be no detector loops installed in the pavement. The exact location of the signals, stop bars, and signs shall be as directed by the Engineer. The portable traffic signal installations shall be set up securely and leveled in a manner approved by the Engineer. The length of the closure may be increased no more than a 100 feet to accommodate the portable traffic signal trailer, due to guardrail.

Both portable traffic signals must be programmed for red flash upon startup, followed by all red interval equal to the bridge clearance time, conflict or power failure. The portable traffic signal system shall be programmed to dwell on all-red.

There shall be a minimum of two traffic signal heads per each approach. All signal heads mounted over the road surface shall be mounted at a minimum height of 16 ft. from the bottom of the signal head to the top of the road surface. All far right signal heads shall be mounted at a minimum height of 8 ft. from the bottom of the signal head to the top of the ground surface. All traffic signal heads shall be equipped with visors and backplates.

All portable traffic signals must be equipped with microwave sensors for vehicle detection and traffic actuation. All portable traffic signal units shall be interconnected using hardwire communication cable or radio communication equipment provided that a site analysis is completed to ensure that there is no interference present that would affect the traffic signal operation and the radio equipment meets all applicable FCC requirements.

In the event of a traffic signal malfunction or a continuous red flash mode, flaggers shall be required on a 24 hour, 7 day a week basis until repairs are made and the traffic signals are fully functional.

<u>Basis of Payment</u>. The above work shall be paid for at the contract unit price for TEMPORARY BRIDGE TRAFFIC SIGNALS and shall be payment in full for supplying and installing the temporary traffic signal described above, complete.

## PROTECTION OF TRAFFIC DURING HYDRO-SCARIFICATION

The Contractor shall protect the traffic from flying objects and/or materials. The Contractor's method of protection shall be subject to the approval of the Engineer and the cost shall be included in BRIDGE DECK HYDRO-SCARIFICATION,  $\frac{1}{2}$ ".

## BRIDGE DECK HYDRO-SCARIFICATION

Any additional work required to assure that all deteriorated or de-bonded concrete for partial depth repairs is removed, as determined by the Engineer, will be included in the cost of BRIDGE DECK HYDROSCARIFICATION, <sup>1</sup>/<sub>2</sub>".

There shall be no traffic allowed on the scarified surface.

## AGGREGATE SHIPPING TICKETS (BDE)

Effective: January 1, 2006

Add the following to Article 1003.01 of the Standard Specifications:

"(f) Shipping Tickets. Shipping tickets for the material shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, "Designation of Aggregate Information on Shipping Tickets"."

Add the following to Article 1004.01 of the Standard Specifications:

"(f) Shipping Tickets. Shipping tickets for the material shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, "Designation of Aggregate Information on Shipping Tickets"."

Add the following to Article 1005.01 of the Supplemental Specifications:

"(d) Shipping Tickets. Shipping tickets for the material shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, "Designation of Aggregate Information on Shipping Tickets"."

80156

### BITUMINOUS CONCRETE SURFACE COURSE (BDE)

Effective: April 1, 2001

Revised: April 1, 2003

Replace the fourth paragraph of Article 406.23(b) of the Standard Specifications with the following:

"Mixture for cracks, joints, flangeways, leveling binder (machine method), leveling binder (hand method) and binder course in excess of 103 percent of the quantity specified by the Engineer will not be measured for payment.

Surface course mixture in excess of 103 percent of adjusted plan quantity will not be measured for payment. The adjusted plan quantity for surface course mixtures will be calculated as follows:

Adjusted Plan Quantity =  $C \times quantity$  shown on the plans or as specified by the Engineer.

where C = metric:  $C = \frac{G_{mb} \times 24.99}{U}$  English:  $C = \frac{G_{mb} \times 46.8}{U}$ 

and where:

- $G_{mb}$  = average bulk specific gravity from approved mix design.
- U = Unit weight of surface course shown on the plans in kg/sq m/25 mm (lb/sq yd/in.), used to estimate plan quantity.

24.99 = metric constant.

46.8 = English constant.

If project circumstances warrant a new surface course mix design, the above equations shall be used to calculate the adjusted plan quantity for each mix design using its respective average bulk specific gravity."

80050

### CONCRETE ADMIXTURES (BDE)

Effective: January 1, 2003 Revised: July 1, 2004

Revise Article 1020.05(b) of the Standard Specifications to read:

"(b) Admixtures. Except as specified, the use of admixtures to increase the workability or to accelerate the hardening of the concrete will be permitted only when approved in writing by the Engineer. The Department will maintain an Approved List of Concrete Admixtures. When the Department permits the use of a calcium chloride accelerator, it shall be according to Article 442.02, Note 5.

When the atmosphere or concrete temperature is 18 °C (65 °F) or higher, a retarding admixture meeting the requirements of Article 1021.03 shall be used in the Class BD Concrete and portland cement concrete bridge deck overlays. The amount of retarding admixture to be used will be determined by the Engineer. The proportions of the ingredients of the concrete shall be the same as without the retarding admixture except that the amount of mixing water shall be reduced, as may be necessary, in order to maintain the consistency of the concrete as required. In addition, a high range water-reducing admixture shall be used in Class BD Concrete. The amount of high range water-reducing admixture will be determined by the Engineer. At the option of the Contractor, a water-reducing admixture may be used. Type I cement shall be used.

For Class PC and PS Concrete, a retarding admixture may be added to the concrete mixture when the concrete temperature is 18 °C (65 °F) or higher. Other admixtures may be used when approved by the Engineer, or if specified by the contract. If an accelerating admixture is permitted by the Engineer, it shall be the non-chloride type.

At the Contractor's option, admixtures in addition to an air-entraining admixture may be used for Class PP-1 concrete. The accelerator shall be the non-chloride type. If a water-reducing or retarding admixture is used, the cement factor may be reduced a maximum 18 kg/cu m (0.30 hundredweight/cu yd). If a high range water-reducing admixture is used, the cement factor may be reduced a maximum 36 kg/cu m (0.60 hundredweight/cu yd). Cement factor reductions shall not be cumulative when using multiple admixtures. An accelerator shall always be added prior to a high range water-reducing admixture, if both are used.

If Class C fly ash or ground granulated blast-furnace slag is used in Class PP-1 concrete, a water-reducing or high range water-reducing admixture shall be used. However, the cement factor shall not be reduced if a water-reducing, retarding, or high range water-reducing admixture is used. In addition, an accelerator shall not be used.

For Class PP-2 or PP-3 concrete, a non-chloride accelerator followed by a high range water-reducing admixture shall be used, in addition to the air-entraining admixture. For Class PP-3 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-2 or PP-3 concrete, the Contractor has the option to use a water-reducing admixture. A retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

When the air temperature is less than 13 °C (55 °F) for Class PP-1 or PP-2 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-4 concrete, a high range water-reducing admixture shall be used in addition to the air-entraining admixture. The Contractor has the option to use a water-reducing admixture. An accelerator shall not be used. For stationary or truck mixed concrete, a retarding admixture shall be used to allow for haul time. The Contractor has the option to use a mobile portland cement concrete plant according to Article 1103.04, but a retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

If the Department specifies a calcium chloride accelerator for Class PP-1 concrete, the maximum chloride dosage shall be 1.0 L (1.0 quart) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.0 L (2.0 quarts) per 45 kg (100 lb) of cement if approved by the Engineer. If the Department specifies a calcium chloride accelerator for Class PP-2 concrete, the maximum chloride dosage shall be 1.3 L (1.3 quarts) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum chloride dosage shall be 1.3 L (1.3 quarts) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.6 L (2.6 quarts) per 45 kg (100 lb) of cement if approved by the Engineer.

For Class PV, MS, SI, RR, SC and SH concrete, at the option of the Contractor, or when specified by the Engineer, a water-reducing admixture or a retarding admixture may be used. The amount of water-reducing admixture or retarding admixture permitted will be determined by the Engineer. The air-entraining admixture and other admixtures shall be added to the concrete separately, and shall be permitted to intermingle only after they have separately entered the concrete batch. The sequence, method and equipment for adding the admixtures shall be approved by the Engineer. The water-reducing admixture shall not delay the initial set of the concrete by more than one hour. Type I cement shall be used.

When a water-reducing admixture is added, a cement factor reduction of up to 18 kg/cu m (0.30 hundredweight/cu yd), from the concrete designed for a specific slump without the admixture, will be permitted for Class PV, MS, SI, RR, SC and SH concrete. When an approved high range water-reducing admixture is used, a cement factor reduction of up to 36 kg/cu m (0.60 hundredweight/cu yd), from a specific water cement/ratio without the admixture, will be permitted based on a 14 percent minimum water reduction. This is applicable to Class PV, MS, SI, RR, SC and SH concrete. A

cement factor below 320 kg/cu m (5.35 hundredweight/cu yd) will not be permitted for Class PV, MS, SI, RR, SC and SH concrete. A cement factor reduction will not be allowed for concrete placed underwater. Cement factor reductions shall not be cumulative when using multiple admixtures.

For use of admixtures to control concrete temperature, refer to Articles 1020.14(a) and 1020.14(b).

The maximum slumps given in Table 1 may be increased to 175 mm (7 in.) when a high range water-reducing admixture is used for all classes of concrete except Class PV and PP."

Revise Section 1021 of the Standard Specifications to read:

### "SECTION 1021. CONCRETE ADMIXTURES"

**1021.01 General.** Admixtures shall be furnished in liquid form ready for use. The admixtures may be delivered in the manufacturer's original containers, bulk tank trucks or such containers or tanks as are acceptable to the Engineer. Delivery shall be accompanied by a ticket which clearly identifies the manufacturer and trade name of the material. Containers shall be readily identifiable to the satisfaction of the Engineer as to manufacturer and trade name of the material they contain.

Prior to inclusion of a product on the Department's Approved List of Concrete Admixtures, the manufacturer shall submit a report prepared by an independent laboratory accredited by the AASHTO Accreditation Program. The report shall show the results of physical tests conducted no more than five years prior to the time of submittal, according to applicable specifications.

Tests shall be conducted using materials and methods specified on a "test" concrete and a "reference" concrete, together with a certification that no changes have been made in the formulation of the material since the performance of the tests. Per the manufacturer's option, the cement content for all required tests shall either be according to applicable specifications or 335 kg/cu m (5.65 cwt/cu yd). Compressive strength test results for six months and one year will not be required.

In addition to the report, the manufacturer shall submit AASHTO T 197 water content and set time test results on the standard cement used by the Department. The test and reference concrete mixture shall contain a cement content of 335 kg/cu m (5.65 cwt/cu yd). The manufacturer may select their lab or an independent lab to perform this testing. The laboratory is not required to be accredited by the AASHTO Accreditation Program.

Prior to the approval of an admixture, the Engineer may conduct all or part of the applicable tests on a sample that is representative of the material to be furnished. The test and reference concrete mixtures tested by the Engineer will contain a cement content of 335 kg/cu m (5.65 cwt/cu yd). For freeze-thaw testing, the Department will perform the test according to Illinois Modified AASHTO T 161, Procedure B.

The manufacturer shall include in the submittal the following information according to ASTM C 494; the average and manufacturing range of specific gravity, the average and manufacturing range of solids in the solution, and the average and manufacturing range of pH. The submittal shall also include an infrared spectrophotometer trace no more than five years old.

When test results are more than seven years old, the manufacturer shall re-submit the infrared spectrophotometer trace and the report prepared by an independent laboratory accredited by the AASHTO Accreditation Program.

All admixtures, except chloride-based accelerators, shall contain no more than 0.3 percent chloride by mass (weight).

**1021.02 Air-Entraining Admixtures.** Air-entraining admixtures shall conform to the requirements of AASHTO M 154.

If the manufacturer certifies that the air-entraining admixture is an aqueous solution of Vinsol resin that has been neutralized with sodium hydroxide (caustic soda), testing for compliance with the requirements may be waived by the Engineer. In the certification, the manufacturer shall show complete information with respect to the formulation of the solution, including the number of parts of Vinsol resin to each part of sodium hydroxide. Before the approval of its use is granted, the Engineer will test the solution for its air-entraining quality in comparison with a solution prepared and kept for that purpose.

**1021.03 Retarding and Water-Reducing Admixtures.** The admixture shall comply with the following requirements:

- (a) The retarding admixture shall comply with the requirements of AASHTO M 194, Type B (retarding) or Type D (water-reducing and retarding).
- (b) The water-reducing admixture shall comply with the requirements of AASHTO M 194, Type A.
- (c) The high range water-reducing admixture shall comply with the requirements of AASHTO M 194, Type F (high range water-reducing) or Type G (high range water-reducing and retarding).

When a Type F or Type G high range water-reducing admixture is used, water-cement ratios shall be a minimum of 0.32.

Type F or Type G admixtures may be used, subject to the following restrictions:

For Class MS, SI, RR, SC and SH concrete, the water-cement ratio shall be a maximum of 0.44.

The Type F or Type G admixture shall be added at the jobsite unless otherwise directed by the Engineer. The initial slump shall be a minimum of 40 mm (1 1/2 in.) prior to addition of the Type F or Type G admixture, except as approved by the Engineer.

When a Type F or Type G admixture is used, retempering with water or with a Type G admixture will not be allowed. An additional dosage of a Type F admixture, not to exceed 40 percent of the original dosage, may be used to retemper concrete once, provided set time is not unduly affected. A second retempering with a Type F admixture may be used for all classes of concrete except Class PP and SC, provided that the dosage does not exceed the dosage used for the first retempering, and provided that the set time is not unduly affected. No further retempering will be allowed.

Air tests shall be performed after the addition of the Type F or Type G admixture.

**1021.04** Set Accelerating Admixtures. The admixture shall comply with the requirements of AASHTO M 194, Type C (accelerating) or Type E (water reducing and accelerating)"

80094

### CURING AND PROTECTION OF CONCRETE CONSTRUCTION (BDE)

Effective: January 1, 2004

Revised: November 1, 2005

Revise the second and third sentences of the eleventh paragraph of Article 503.06 of the Standard Specifications to read:

"Forms on substructure units shall remain in place at least 24 hours. The method of form removal shall not result in damage to the concrete."

Delete the twentieth paragraph of Article 503.22 of the Standard Specifications.

Revise the "Unit Price Adjustments" table of Article 503.22 of the Standard Specifications to read:

"UNIT PRICE ADJUSTMENTS	
Type of Construction	Percent Adjustment in Unit Price
For concrete in substructures, culverts (having a waterway opening of more than 1 sq m (10 sq ft)), pump houses, and retaining walls (except concrete pilings, footings and foundation seals):	
When protected by: Protection Method II Protection Method I	115% 110%
For concrete in superstructures: When protected by:	
Protection Method II Protection Method I	123% 115%
For concrete in footings: When protected by:	
Protection Method I, II or III For concrete in slope walls:	107%
When protected by: Protection Method I	107%"

Delete the fourth paragraph of Article 504.05(a) of the Standard Specifications.

Revise the second and third sentences of the fifth paragraph of Article 504.05(a) of the Standard Specifications to read:

"All test specimens shall be cured with the units according to Article 1020.13."

Revise the first paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"Curing and Low Air Temperature Protection. The curing and protection for precast, prestressed concrete members shall be according to Article 1020.13 and this Article."

Revise the first sentence of the second paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"For curing, air vents shall be in place and shall be so arranged that no water can enter the void tubes during the curing of the members."

Revise the first sentence of the third paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"As soon as each member is finished, the concrete shall be covered with curing material according to Article 1020.13."

Revise the eighth paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"The prestressing force shall not be transferred to any member before the concrete has attained the compressive strength of 28,000 kPa (4000 psi) or other higher compressive release strength specified on the plans, as determined from tests of 150 mm (6 in.) by 300 mm (12 in.) cylinders cured with the member according to Article 1020.13. Members shall not be shipped until 28-day strengths have been attained and members have a yard age of at least 4 days."

Delete the third paragraph of Article 512.03(a) of the Standard Specifications.

Delete the last sentence of the second paragraph of Article 512.04(d) of the Standard Specifications.

Revise the "Index Table of Curing and Protection of Concrete Construction" table of Article 1020.13 of the Standard Specifications to read:

"INDEX TABLE OF O	CURING AND PROTECTION O	F CONCRETE	CONSTRUCTION
		CURING	
TYPE OF CONSTRUCTION	CURING METHODS	PERIOD DAYS	LOW AIR TEMPERATURE PROTECTION METHODS
Cast-in-Place Concrete: 11/			
Pavement			
Shoulder	1020.13(a)(1)(2)(3)(4)(5) 3/5/	3	1020.13(c)
Base Course			
Base Course Widening	1020.13(a)(1)(2)(3)(4)(5) 1/2/	3	1020.13(c)
Driveway			
Median			
Curb Gutter	1020.13(a)(1)(2)(3)(4)(5) 4/5/	3	1020.13(c) <sup>16/</sup>
Curb and Gutter	1020.13(a)(1)(2)(3)(4)(5)	3	1020.13(0)
Sidewalk			
Slope Wall			
Paved Ditch			
Catch Basin			
Manhole	1020.13(a)(1)(2)(3)(4)(5) 4/	3	1020.13(c)
Inlet			
Valve Vault			
Pavement Patching	1020.13(a)(1)(2)(3)(4)(5) <sup>2/</sup>	3 <sup>12/</sup>	1020.13(c)
Pavement Replacement	1020.13(a)(1)(2)(3)(4)(5) <sup>1/2/</sup>	3	442.06(h) and 1020.13(c)
Railroad Crossing	1020.13(a)(3)(5)	1	1020.13(c)
Piles	1020.13(a)(3)(5)	7	1020.13(e)(1)(2)(3)
Footings	1/6/		
Foundation Seals	1020.13(a)(1)(2)(3)(4)(5) 4/6/	7	1020.13(e)(1)(2)(3)
Substructure	1020.13(a)(1)(2)(3)(4)(5) <sup>1/7/</sup>	7	1020.13(e)(1)(2)(3)
Superstructure (except deck)	1020.13(a)(1)(2)(3)(5) <sup>8/</sup>	7	1020.13(e)(1)(2)
Deck	1020.13(a)(5)	7	1020.13(e)(1)(2) <sup>17/</sup>
Retaining Walls	1020.13(a)(1)(2)(3)(4)(5) <sup>1/7/</sup>	7	1020.13(e)(1)(2)
Pump Houses	1020.13(a)(1)(2)(3)(4)(5) <sup>1/</sup>	7	1020.13(e)(1)(2)
Culverts	1020.13(a)(1)(2)(3)(4)(5) <sup>4/6/</sup>	7	1020.13(e)(1)(2) <sup>18/</sup>
Other Incidental Concrete	1020.13(a)(1)(2)(3)(5)	3	1020.13(c)
Precast Concrete: 11/			· ·
Bridge Beams			
Piles			
Bridge Slabs	1020.13(a)(3)(5) <sup>9/ 10/</sup>	As required. 13	<sup>3/</sup> 504.06(c)(6), 1020.13(e)(2) <sup>19/</sup>
Nelson Type Structural Member			
All Other Precast Items	1020.13(a)(3)(4)(5) <sup>2/9/10/</sup>	As required. <sup>14</sup>	<sup>/</sup> 504.06(c)(6), 1020.13(e)(2) <sup>19/</sup>
Precast, Prestressed Concrete: 11/	1		
All Items	1020.13(a)(3)(5) <sup>9/ 10/</sup>	Until stran	d504.06(c)(6), 1020.13(e)(2) <sup>19/</sup>
			is
		released. 15/	

Notes-General:

- 1/ Type I, membrane curing only
- 2/ Type II, membrane curing only
- 3/ Type III, membrane curing only
- 4/ Type I, II and III membrane curing
- 5/ Membrane curing will not be permitted between November 1 and April 15.
- 6/ The use of water to inundate footings, foundation seals or the bottom slab of culverts is permissible when approved by the Engineer, provided the water temperature can be maintained at 7 °C ( 45 °F) or higher.
- 7/ Asphalt Emulsion for Waterproofing may be used in lieu of other curing methods when specified and permitted according to Article 503.18.
- 8/ On non-traffic surfaces which receive protective coat according to Article 503.19, a linseed oil emulsion curing compound may be used as a substitute for protective coat and other curing methods. The linseed emulsion curing compound will be permitted between April 16 and October 31 of the same year, provided it is applied with a mechanical sprayer according to Article 1101.09 (b), and meets the material requirements of Article 1022.07.
- 9/ Steam curing (heat and moisture) is acceptable and shall be accomplished by the method specified in Article 504.06(c)(6).
- 10/ A moist room according to AASHTO M 201 is acceptable for curing.
- 11/ If curing is required and interrupted because of form removal for cast-in-place concrete items, precast concrete products, or precast prestressed concrete products, the curing shall be resumed within two hours from the start of the form removal.
- 12/ Curing maintained only until opening strength is attained, with a maximum curing period of three days.
- 13/ The curing period shall end when the concrete has attained the mix design strength. The producer has the option to discontinue curing when the concrete has attained 80 percent of the mix design strength or after seven days. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 14/ The producer shall determine the curing period or may elect to not cure the product. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 15/ The producer has the option to continue curing after strand release.
- 16/ When structural steel or structural concrete is in place above slope wall, Article 1020.13(c) shall not apply. The protection method shall be according to Article 1020.13(e)(1).
- 17/ When Article 1020.13(e)(2) is used to protect the deck, the housing may enclose only the bottom and sides. The top surface shall be protected according to Article 1020.13(e)(1).
- 18/ For culverts having a waterway opening of 1 sq m (10 sq ft) or less, the culverts may be protected according to Article 1020.13(e)(3).
- 19/ The seven day protection period in the first paragraph of Article 1020.13(e)(2) shall not apply. The protection period shall end when curing is finished. For the third paragraph of Article 1020.13(e)(2), the decrease in temperature shall be according to Article 504.06(c)(6)."

Add the following to Article 1020.13(a) of the Standard Specifications:

"(5) Wetted Cotton Mat Method. After the surface of concrete has been textured or finished, it shall be covered immediately with dry cotton mats. The cotton mats shall be placed in a manner which will not mar the concrete surface. A texture resulting from the cotton mat material is acceptable. The cotton mats shall then be wetted immediately and thoroughly soaked with a gentle spray of water. For bridge decks, a foot bridge shall be used to place and wet the cotton mats.

The cotton mats shall be maintained in a wetted condition until the concrete has hardened sufficiently to place soaker hoses without marring the concrete surface. The soaker hoses shall be placed on top of the cotton mats at a maximum 1.2 m (4 ft) spacing. The cotton mats shall be kept wet with a continuous supply of water for the remainder of the curing period. Other continuous wetting systems may be used if approved by the Engineer.

After placement of the soaker hoses, the cotton mats shall be covered with white polyethylene sheeting or burlap-polyethylene blankets.

For construction items other than bridge decks, soaker hoses or a continuous wetting system will not be required if the alternative method keeps the cotton mats wet. Periodic wetting of the cotton mats is acceptable.

For areas inaccessible to the cotton mats on bridge decks, curing shall be according to Article 1020.13(a)(3)."

Revise the first paragraph of Article 1020.13(c) of the Standard Specifications to read:

"Protection of Portland Cement Concrete, Other Than Structures, From Low Air Temperatures. When the official National Weather Service forecast for the construction area predicts a low of 0 °C (32 °F), or lower, or if the actual temperature drops to 0 °C (32 °F), or lower, concrete less than 72 hours old shall be provided at least the following protection:"

Delete Article 1020.13(d) and Articles 1020.13(d)(1),(2),(3),(4) of the Standard Specifications.

Revise the first five paragraphs of Article 1020.13(e) of the Standard Specifications to read:

"Protection of Portland Cement Concrete Structures From Low Air Temperatures. When the official National Weather Service Forecast for the construction area predicts a low below 7 °C (45 °F), or if the actual temperature drops below 7 °C (45 °F), concrete less than 72 hours old shall be provided protection. Concrete shall also be provided protection when placed during the winter period of December 1 through March 15. Concrete shall not be placed until the materials, facilities, and equipment for protection are approved by the Engineer. When directed by the Engineer, the Contractor may be required to place concrete during the winter period. If winter construction is specified, the Contractor shall proceed with the construction, including concrete, excavation, pile driving, steel erection, and all appurtenant work required for the complete construction of the item, except at times when weather conditions make such operations impracticable.

Regardless of the precautions taken, the Contractor shall be responsible for protection of the concrete placed and any concrete damaged by cold temperatures shall be removed and replaced at no additional cost to the Department."

Add the following at the end of the third paragraph of Article 1020.13(e)(1) of the Standard Specifications:

"The Contractor shall provide means for checking the temperature of the surface of the concrete during the protection period."

Revise the second sentence of the first paragraph of Article 1020.13(e)(2) of the Standard Specifications to read:

"The Contractor shall provide means for checking the temperature of the surface of the concrete or air temperature within the housing during the protection period."

Delete the last sentence of the first paragraph of Article 1020.13(e)(3) of the Standard Specifications.

Add the following Article to Section 1022 of the Standard Specifications:

"**1022.06 Cotton Mats.** Cotton mats shall consist of a cotton fill material, minimum 400 g/sq m (11.8 oz/sq yd), covered with unsized cloth or burlap, minimum 200 g/sq m (5.9 oz/sq yd), and be tufted or stitched to maintain stability.

Cotton mats shall be in a condition satisfactory to the Engineer. Any tears or holes in the mats shall be repaired."

Add the following Article to Section 1022 of the Standard Specifications:

"1022.07 Linseed Oil Emulsion Curing Compound. Linseed oil emulsion curing compound shall be composed of a blend of boiled linseed oil and high viscosity, heavy bodied linseed oil emulsified in a water solution. The curing compound shall meet the requirements of a Type I according to Article 1022.01, except the drying time requirement will be waived. The oil phase shall be  $50 \pm 4$  percent by volume. The oil phase shall consist of 80 percent by mass (weight) boiled linseed oil and 20 percent by mass (weight) Z-8 viscosity linseed oil. The water phase shall be  $50 \pm 4$  percent by volume."

Revise Article 1020.14 of the Standard Specifications to read:

"**1020.14 Temperature Control for Placement.** Temperature control for concrete placement shall be according to the following.

(a) Temperature Control other than Structures. The temperature of the concrete immediately before placement shall be a minimum of 10 °C (50 °F) and a maximum of 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

Plastic concrete temperatures up to 35 °C (96 °F), as placed, may be permitted provided job site conditions permit placement and finishing without excessive use of water on and/or overworking of the surface. The occurrence within 24 hours of unusual surface distress shall be cause to revert to a maximum 32 °C (90 °F) plastic concrete temperature.

Concrete shall not be placed when the air temperature is below 5 °C (40 °F) and falling or below 2 °C (35 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to between 20 °C (70 °F) and 65 °C (150 °F). The aggregates may be heated by either steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

For pavement patching, refer to Article 442.06(e) for additional information on temperature control for placement.

(b) Temperature Control for Structures. The temperature of the concrete, as placed in the forms, shall be a minimum of 10 °C (50 °F) and a maximum of 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits. When insulated forms are used, the temperature of the concrete mixture shall not exceed 25 °C (80 °F). If the Engineer determines that heat of hydration might cause excessive temperatures in the concrete, the concrete shall be placed at a temperature between 10 °C (50 °F) and 15 °C (60 °F). When concrete is placed in contact with previously placed concrete, the temperature of the concrete may be increased as required to offset anticipated heat loss.

Concrete shall not be placed when the air temperature is below 7 °C (45 °F) and falling or below 4 °C (40 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to between 20 °C (70 °F) and 65 °C (150 °F). The aggregates may be heated by either steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

(c) Temperature. The concrete temperature shall be determined according to ASTM C 1064."

80114

### FLAGGER VESTS (BDE)

Effective: April 1, 2003 Revised: January 1, 2006

Revise the first sentence of Article 701.04(c)(1) of the Standard Specifications to read:

"The flagger shall be stationed to the satisfaction of the Engineer and be equipped with a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-2004 for Conspicuity Class 2 garments and approved flagger traffic control signs conforming to Standard 702001 and Article 702.05(e)."

Revise Article 701.04(c)(6) of the Standard Specifications to read:

"(6) Nighttime Flagging. Flaggers shall be illuminated by an overhead light source providing a minimum vertical illuminance of 108 lux (10 fc) measured 300 mm (1 ft) out from the flagger's chest. The bottom of any luminaire shall be a minimum of 3 m (10 ft) above the pavement. Luminaire(s) shall be shielded to minimize glare to approaching traffic and trespass light to adjoining properties.

The flagger vest shall be a fluorescent orange or fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 3 garments."

80101

### PARTIAL PAYMENTS (BDE)

Effective: September 1, 2003

Revise Article 109.07 of the Standard Specifications to read:

"109.07 Partial Payments. Partial payments will be made as follows:

(a) Progress Payments. At least once each month, the Engineer will make a written estimate of the amount of work performed in accordance with the contract, and the value thereof at the contract unit prices. The amount of the estimate approved as due for payment will be vouchered by the Department and presented to the State Comptroller for payment. No amount less than \$1000.00 will be approved for payment other than the final payment.

The failure to perform any requirement, obligation, or term of the contract by the Contractor shall be reason for withholding any progress payments until the Department determines that compliance has been achieved. Furthermore, progress payments may be reduced by liens filed pursuant to Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c).

(b) Material Allowances. At the discretion of the Department, payment may be made for materials, prior to their use in the work, when satisfactory evidence is presented by the Contractor. Satisfactory evidence includes justification for the allowance (to expedite the work, meet project schedules, regional or national material shortages, etc.), documentation of material and transportation costs, and evidence that such material is properly stored on the project or at a secure location acceptable and accessible to the Department.

Material allowances will be considered only for nonperishable materials when the cost, including transportation, exceeds \$10,000 and such materials are not expected to be utilized within 60 days of the request for the allowance. For contracts valued under \$500,000, the minimum \$10,000 requirement may be met by combining the principal (material) product of no more than two contract items. An exception to this two item limitation may be considered for any contract regardless of value for items in which material (products) are similar except for type and/or size.

Material allowances shall not exceed the value of the contract items in which used and shall not include the cost of installation or related markups. Amounts paid by the Department for material allowances will be deducted from estimates due the Contractor as the material is used. Two-sided copies of the Contractor's cancelled checks for materials and transportation must be furnished to the Department within 60 days of payment of the allowances or the amounts will be reclaimed by the Department."

80116

### PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000

Revised: January 1, 2006

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts and to set the time for such payments.

State law also addresses the timing of payments to be made to subcontractors and material suppliers. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, requires that when a Contractor receives any payment from the Department, the Contractor shall make corresponding, proportional payments to each subcontractor and material supplier performing work or supplying material within 15 calendar days after receipt of the Department payment. Section 7 of the Act further provides that interest in the amount of 2 percent per month, in addition to the payment due, shall be paid to any subcontractor or material supplier by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors and material suppliers throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the State Prompt Payment Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

When progress payments are made to the Contractor according to Article 109.07 of the Standard Specifications, the Contractor shall make a corresponding payment to each subcontractor and material supplier in proportion to the work satisfactorily completed by each subcontractor and for the material supplied to perform any work of the contract. The proportionate amount of partial payment due to each subcontractor and material supplier throughout the contracting chain shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors and material suppliers shall be paid by the Contractor within 15 calendar days after the receipt of payment from the Department. The Contractor shall not hold retainage from the subcontractors. These obligations shall also apply to any payments made by subcontractors and material suppliers to their subcontractors and material suppliers; and to all payments made to lower tier subcontractors and material suppliers throughout the contracting chain. Any payment or portion of a payment subject to this provision may only be withheld from the subcontractor or material supplier to whom it is due for reasonable cause.

This Special Provision does not create any rights in favor of any subcontractor or material supplier against the State or authorize any cause of action against the State on account of any payment, nonpayment, delayed payment, or interest claimed by application of the State Prompt Payment Act. The Department will not approve any delay or postponement of the 15 day requirement except for reasonable cause shown after notice and hearing pursuant to Section 7(b) of the State Prompt Payment Act.

available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond according to the Public Construction Bond Act, 30 ILCS 550.

80022

# PAYROLLS AND PAYROLL RECORDS (BDE)

Effective: August 10, 2005

<u>FEDERAL AID CONTRACTS</u>. Add the following State of Illinois requirements to the Federal requirements contained in Section V of Form FHWA-1273:

"The payroll records shall include each worker's name, address, telephone number, social security number, classification, rate of pay, number of hours worked each day, starting and ending times of work each day, total hours worked each week, itemized deductions made, and actual wages paid.

The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work. The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form."

<u>STATE CONTRACTS</u>. Revise Section IV of Check Sheet #5 of the Recurring Special Provisions to read:

"IV.COMPLIANCE WITH THE PREVAILING WAGE ACT

- Prevailing Wages. All wages paid by the Contractor and each subcontractor shall be in compliance with The Prevailing Wage Act (820 ILCS 130), as amended, except where a prevailing wage violates a federal law, order, or ruling, the rate conforming to the federal law, order, or ruling shall govern. The Contractor shall be responsible to notify each subcontractor of the wage rates set forth in this contract and any revisions thereto. If the Department of Labor revises the wage rates, the Contractor will not be allowed additional compensation on account of said revisions.
- 2. Payroll Records. The Contractor and each subcontractor shall make and keep, for a period of three years from the date of completion of this contract, records of the wages paid to his/her workers. The payroll records shall include each worker's name, address, telephone number, social security number, classification, rate of pay, number of hours worked each day, starting and ending times of work each day, total hours worked each week, itemized deductions made, and actual wages paid. Upon two business days' notice, these records shall be available, at all reasonable hours at a location within the State, for inspection by the Department or the Department of Labor.

3. Submission of Payroll Records. The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work. The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form.

Each submittal shall be accompanied by a statement signed by the Contractor or subcontractor which avers that: (i) such records are true and accurate; (ii) the hourly rate paid to each worker is not less than the general prevailing rate of hourly wages required by the Act; and (iii) the Contractor or subcontractor is aware that filing a payroll record that he/she knows to be false is a Class B misdemeanor.

4. Employee Interviews. The Contractor and each subcontractor shall permit his/her employees to be interviewed on the job, during working hours, by compliance investigators of the Department or the Department of Labor."

80155

# PERSONAL PROTECTIVE EQUIPMENT (BDE)

Effective: July 1, 2004

All personnel, excluding flaggers, working outside of a vehicle (car or truck) within 7.6 m (25 ft) of pavement open to traffic shall wear a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/.green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments. Other types of garments may be substituted for the vest as long as the garments have manufacturers tags identifying them as meeting the ANSI Class 2 requirement.

80130

### PORTABLE CHANGEABLE MESSAGE SIGNS (BDE)

Effective: November 1, 1993

Revised: April 2, 2004

<u>Description</u>. This work shall consist of furnishing, placing, and maintaining changeable message sign(s) at the locations(s) shown on the plans or as directed by the Engineer.

The sign(s) shall be trailer mounted. The message panel shall be at least 2.1 m (7 ft) above the pavement, present a level appearance, and be capable of displaying up to eight characters in each of three lines at a time. Character height shall be 450 mm (18 in.).

The message panel shall be of either a bulb matrix or disc matrix design controlled by an onboard computer capable of storing a minimum of 99 programmed messages for instant recall. The computer shall be capable of being programmed to accept messages created by the

operator via an alpha-numeric keyboard and able to flash any six messages in sequence. The message panel shall also be capable of being controlled by a computer from a remote location via a cellular linkage. The Contractor shall supply the modem, the cellular phone, and the necessary software to run the sign from a remote computer at a location designated by the Engineer. The Contractor shall promptly program and/or reprogram the computer to provide the messages as directed by the Engineer.

The message panel shall be visible from 400 m (1/4 mile) under both day and night conditions. The letters shall be legible from 250 m (750 ft).

The sign shall include automatic dimming for nighttime operation and a power supply capable of providing 24 hours of uninterrupted service.

The Contractor shall provide all preventive maintenance efforts s(he) deems necessary to achieve uninterrupted service. If service is interrupted for any cause and not restored within 24 hours, the Engineer will cause such work to be performed as may be necessary to provide this service. The cost of such work shall be borne by the Contractor or deducted from current or future compensation due the Contractor.

When the sign(s) are displaying messages, they shall be considered a traffic control device. At all times when no message is displayed, they shall be considered equipment.

<u>Basis of Payment</u>. When portable changeable message signs are shown on the Standard, this work will not be paid for separately but shall be considered as included in the cost of the Standard.

For all other portable changeable message signs, this work will be paid for at the contract unit price per calendar month for each sign as CHANGEABLE MESSAGE SIGN.

80124

### PORTLAND CEMENT (BDE)

Effective: January 1, 2005

Revised: November 1, 2005

Add the following paragraph after the last paragraph of Article 1001.01 of the Standard Specifications.

"For portland cement according to ASTM C 150, the bill of lading shall state if limestone has been added. The bill of lading shall also state that the limestone addition is not in excess of five percent by mass (weight) of the cement."

80139

## PORTLAND CEMENT CONCRETE (BDE)

Effective: November 1, 2002

Add the following paragraph after the fourth paragraph of Article 1103.01(b) of the Standard Specifications:

"The truck mixer shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(c) of the Standard Specifications:

"The truck agitator shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(d) of the Standard Specifications:

"The nonagitator truck shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Revise the first sentence of the first paragraph of Article 1103.02 of the Standard Specifications to read:

"The plant shall be approved before production begins according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

### 80083

## PORTLAND CEMENT CONCRETE PATCHING (BDE)

Effective: January 1, 2001 Revised: January 1, 2004

Revise Note 1 of Article 442.02 of the Standard Specifications, to read:

"Note 1. When patching ramp pavements and two lane pavements with two way traffic, Class PP-2, PP-3, or PP-4 concrete shall be used for Class A, Class B and Class C patching. For all other pavements, Class PP-1, PP-2, PP-3, or PP-4 concrete shall be used, at the Contractor's option, for Class A, Class B and Class C patching."

Delete Note 2 of Article 442.02 of the Standard Specifications.

Add the following to Article 442.02 of the Standard Specifications:

Note 5. The calcium chloride accelerator, when permitted by the Department, shall be Type L (Liquid) with a minimum of 32.0 percent by mass (weight) of calcium chloride."

Revise the first paragraph of Article 442.06(e) of the Standard Specifications to read:

"(e) Concrete Placement. For Class A, Class B and Class C Patches, concrete shall be placed according to Article 420.07 and governed by the limitations set forth in Article 1020.14, except that the maximum temperature of the mixed concrete immediately before placing shall be 35 °C (96 °F), the required use of an approved retarding admixture when the plastic concrete reaches 30 °C (85 °F) shall not apply."

Revise the first paragraph of Article 442.06(h) of the Standard Specifications to read:

"(h) Curing and Protection. In addition to Article 1020.13, when the air temperature is less than 13 °C (55 °F), the Contractor shall cover the patch with minimum R12 insulation until opening strength is reached. Insulation is optional when the air temperature is 13 °C - 35 °C (55 °F - 96 °F). Insulation shall not be placed when the air temperature is greater than 35 °C (96 °F)."

Revise the second paragraph of Article 701.05(e)(1)d.1. of the Standard Specifications to read:

"No open holes, broken pavement, or partially filled holes shall remain overnight for bituminous patching or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used. The only exception is conditions beyond the control of the Contractor."

Revise Article 701.05(e)(2)b. of the Standard Specifications to read:

"b. Strength Tests. For patches constructed with Class PP-1, PP-2, PP-3, or PP-4 concrete, the pavement may be opened to traffic when test specimens cured with the patches have obtained a minimum flexural strength of 4150 kPa (600 psi) or a minimum compressive strength of 22,100 kPa (3200 psi) according to Article 1020.09.

For patches constructed with Class PP-2, PP-3, or PP-4 concrete which can obtain a minimum flexural strength of 4150 kPa (600 psi) or a minimum of compressive strength of 22,100 kPa (3200 psi) in 16 hours, the pavement may be opened to traffic at a lower opening strength. The specimens cured with the patches shall have obtained a minimum flexural strength of 2050 kPa (300 psi) or a minimum compressive strength of 11,000 kPa (1600 psi) according to Article 1020.09, to permit opening pavement to traffic.

With the approval of the Engineer, concrete strength may be determined according to AASHTO T 276. The strength-maturity relationship shall be developed from concrete which has an air content near the upper specification limit. The strength-maturity relationship shall be re-established if the mix design or materials are changed."

Revise Article 701.05(e)(2)c. of the Standard Specifications to read:

"c. Construction Operations. For Class PP-2, PP-3, or PP-4 concrete used on ramp pavements and two lane pavements with two way traffic, or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used for other pavements, Contractor construction operations shall be performed in a manner which allows the patches to be opened the same day and before nightfall. If patches are not opened before nightfall, the additional traffic control shall be at the Contractor's expense. Any time patches cannot be opened before nightfall, the Contractor shall change subsequent construction operations or the mix design. The changes shall be at no additional cost to the Department."

Revise Table 1 of Article 1020.04 of the Standard Specifications by replacing Class PP concrete with the following:

"TABLE 1. CLASSES OF PORTLAND CEMENT CONCRETE AND MIX DESIGN CRITERIA				
Class of Concrete	Use	Specification Section Reference	Cement Factor kg/cu m (cwt/cu yd)	Max. Water/Cement Ratio kg/kg (lb/lb)
PP-1	PCC Pavement Patching Bridge Deck Patching	442	Type I Cement 385 to 445 (6.50 to 7.50) Type III Cement 365 to 425 (6.20 to 7.20)	0.44
PP-2	PCC Pavement Patching Bridge Deck Patching	442	Type I Cement 435 (7.35)	0.38
PP-3	PCC Pavement Patching Bridge Deck Patching	442	Type III Cement 435 (7.35)	0.35
PP-4	PCC Pavement Patching Bridge Deck Patching	442	Rapid Hardening Cement 355 to 370 (6.00 to 6.25)	0.50

For PP-1, the Contractor has the option to replace the Type I Cement with Class C fly ash or ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 15 percent by mass (weight), at a minimum replacement ratio of 1.5:1.

For PP-2, the Contractor has the option to replace the Type I cement with ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 30 percent by mass (weight), at a minimum replacement ratio of 1:1.

For PP-3, in addition to the cement, 60 kg/cu m (100 lb/cu yd) of ground granulated blastfurnace slag and 30 kg/cu m (50 lb/cu yd) of microsilica are required. For an air temperature greater than 30 °C (85 °F), the Contractor has the option to replace the Type III cement with Type I cement.

For PP-4, the cement shall be from the Department's "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs".

TABLE 1. (CONT'D) CLASSES OF PORTLAND CEMENT CONCRETE AND MIX DESIGN CRITERIA					
Class of Concrete	Slump, mm (in.)	Mix Design Compressive Strength, kPa (psi) Hours 48	Mix Design Flexural Strength, kPa (psi) Hours 48	Air Content, %	Coarse Aggregate Gradations Permitted
PP – 1	100 (4) Max	22,100 (3200)	4150 (600)	4.0 - 7.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 2	150 (6) Max	22,100 (3200)	4150 (600)	4.0 - 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 3	100 (4) Max	22,100 (3200)	4150 (600)	4.0 - 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 4	150 (6) Max	22,100 (3200)	4150 (600)	4.0 - 6.0	CA-7, CA-11, CA-13, CA14, or CA-16

For PP-1, PP-2, PP-3 or PP-4; only CA-13, CA-14, or CA-16 may be used for bridge deck patching. In addition, the mix design strength at 48 hours shall be increased to 27,500 kPa (4,000 psi) compressive or 4,650 kPa (675 psi) flexural for bridge deck patching.

For PP-1, the slump may be increased to 150 mm (6 in.) Max if a high range water-reducing admixture is used."

Delete Article 1020.05(g) of the Standard Specifications. 80036

## RAP FOR USE IN BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000 Revised: April 1, 2002

Revise Article 1004.07 to read:

"**1004.07 RAP Materials.** RAP is reclaimed asphalt pavement resulting from cold milling or crushing of an existing dense graded hot-mix asphalt pavement. RAP must originate from routes or airfields under federal, state or local agency jurisdiction. The Contractor shall supply documentation that the RAP meets these requirements.

- (a) Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. No additional RAP will be allowed on top of the pile after the pile has been sealed.
  - (1) Homogeneous. Homogeneous RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only and represent the same aggregate quality, but shall be at least C quality or better, the same type of crushed aggregate (either crushed natural aggregate, ACBF slag, or steel slag), similar gradation and similar AC content. If approved by the Engineer, combined single pass surface/binder millings may be considered "homogenous", with a quality rating dictated by the lowest coarse aggregate quality present in the mixture. Homogenous stockpiles shall meet the requirements of Article 1004.07(d). Homogeneous RAP stockpiles not meeting these requirements may be processed (crushing and screening) and retested.
  - (2) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only. The coarse aggregate in this RAP shall be crushed aggregate only and may represent more than one aggregate type and/or quality but shall be at least C quality or better. This RAP may have an inconsistent gradation and/or asphalt cement content prior to processing. All conglomerate RAP shall be processed prior to testing by crushing to where all RAP shall pass the 16 mm (5/8 in.) or smaller screen. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate RAP stockpiles shall meet the requirements of Article 1004.07(d).
  - (3) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP containing coarse aggregate (crushed or round) that is at least D quality or better. This RAP may have an inconsistent gradation and/or asphalt content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate DQ RAP shall meet the requirements of Article 1004.07(d).

Reclaimed Superpave Low ESAL IL-9.5L surface mixtures shall only be placed in conglomerate DQ RAP stockpiles due to the potential for rounded aggregate.

- (4) Other. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Other". "Other" RAP stockpiles shall not be used in any of the Department's bituminous mixtures.
- (b) Use. The allowable use of a RAP stockpile shall be set by the lowest quality of coarse aggregate in the RAP stockpile. Class I/Superpave surface mixtures are designated as containing Class B quality coarse aggregate only. Superpave Low ESAL IL-19.0L binder

and IL-9.5L surface mixtures are designated as Class C quality coarse aggregate only. Class I/Superpave binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate only. Bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate only. Any mixture not listed above shall have the designated quality determined by the Department.

RAP containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in Class I/Superpave (including Low ESAL) surface mixtures only. RAP stockpiles for use in Class I/Superpave mixtures (including Low ESAL), base course, base course widening and Class B mixtures shall be either homogeneous or conglomerate RAP stockpiles except conglomerate RAP stockpiles shall not be used in Superpave surface mixture Ndesign 50 or greater. RAP for use in bituminous aggregate mixtures (BAM) shoulders and BAM stabilized subbase shall be from homogeneous, conglomerate, or conglomerate DQ stockpiles.

Additionally, RAP used in Class I/Superpave surface mixtures shall originate from milled or crushed mixtures only, in which the coarse aggregate is of Class B quality or better. RAP stockpiles for use in Class I/Superpave (including Low ESAL) binder mixes as well as base course, base course widening and Class B mixtures shall originate from milled or processed surface mixture, binder mixture, or a combination of both mixtures uniformly blended to the satisfaction of the Engineer, in which the coarse aggregate is of Class C quality or better.

- (c) Contaminants. RAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.
- (d) Testing. All RAP shall be sampled and tested either during or after stockpiling.

For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 450 metric tons (500 tons) for the first 1800 metric tons (2,000 tons) and one sample per 1800 metric tons (2,000 tons) thereafter. A minimum of five tests shall be required for stockpiles less than 3600 metric tons (4,000 tons).

For testing existing stockpiles, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP pile either insitu or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to extract representative samples throughout the pile for testing.

Before extraction, each field sample shall be split to test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

All of the extraction results shall be compiled and averaged for asphalt content and gradation. Individual extraction test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	Homogeneous / Conglomerate	Conglomerate "D" Quality
25 mm (1 in.)		± 5%
12.5 mm (1/2 in.)	± 8%	± 15%
4.75 mm (No. 4)	± 6%	± 13%
2.36 mm (No. 8)	± 5%	
1.18 mm (No. 16)		± 15%
600 μm (No. 30)	± 5%	
75 μm (No. 200)	$\pm 2.0\%$	$\pm 4.0\%$
AC	± 0.4%	$\pm 0.5\%$

If more than 20 percent of the individual sieves are out of the gradation tolerances, or if more than 20 percent of the asphalt content test results fall outside the appropriate tolerances, the RAP will not be allowed to be used in the Department's bituminous concrete mixtures unless the RAP representing the failing tests is removed from the stockpile to the satisfaction of the Engineer. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

(e) Designs. At the Contractor's option, bituminous concrete mixtures may be constructed utilizing RAP material meeting the above detailed requirements. The amount of RAP included in the mixture shall not exceed the percentages specified in the plans.

RAP designs shall be submitted for volumetric verification. If additional RAP stockpiles are tested and found that no more than 20 percent of the results, as defined under "Testing" herein, are outside of the control tolerances set for the original RAP stockpile and design, and meets all of the requirements herein, the additional RAP stockpiles may be used in the original mix design at the percent previously verified.

(f) Production. The coarse aggregate in all RAP used shall be equal to or less than the nominal maximum size requirement for the bituminous mixture being produced.

To remove or reduce agglomerated material, a scalping screen, crushing unit or comparable sizing device approved by the Engineer shall be used in the RAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If the RAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP and either switch to the virgin aggregate design or submit a new RAP design.

80011

### SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: April 2, 2005

To account for the preparatory work and operations necessary for the movement of subcontractor personnel, equipment, supplies, and incidentals to the project site and for all other work or operations that must be performed or costs incurred when beginning work approved for subcontracting in accordance with Article 108.01 of the Standard Specifications, the Contractor shall make a mobilization payment to each subcontractor.

This mobilization payment shall be made at least 14 days prior to the subcontractor starting work. The amount paid shall be equal to 3 percent of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

This provision shall be incorporated directly or by reference into each subcontract approved by the Department.

80143

### SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000

Revised: April 1, 2004

<u>Description</u>. This work shall consist of designing, producing and constructing Superpave bituminous concrete mixtures using Illinois Modified Strategic Highway Research Program (SHRP) Superpave criteria. This work shall be according to Sections 406 and 407 of the Standard Specifications and the special provision, "Quality Control/Quality Assurance of Bituminous Concrete Mixtures", except as follows.

Materials.

- (a) Fine Aggregate Blend Requirement. The Contractor may be required to provide FA 20 manufactured sand to meet the design requirements. For mixtures with Ndesign ≥ 90, at least 50 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation.
- (b) Reclaimed Asphalt Pavement (RAP). If the Contractor is allowed to use more than 15 percent RAP, as specified in the plans, a softer performance-graded binder may be required as determined by the Engineer.

RAP shall meet the requirements of the special provision, "RAP for Use in Bituminous Concrete Mixtures".

RAP will not be permitted in mixtures containing polymer modifiers.

RAP containing steel slag will be permitted for use in top-lift surface mixtures only.

(c) Bituminous Material. The asphalt cement (AC) shall be performance-graded (PG) or polymer modified performance-graded (SBS-PG or SBR-PG) meeting the requirements of Article 1009.05 of the Standard Specifications for the grade specified on the plans.

The following additional guidelines shall be used if a polymer modified asphalt is specified:

- (1) The polymer modified asphalt cement shall be shipped, maintained, and stored at the mix plant according to the manufacturer's requirements. Polymer modified asphalt cement shall be placed in an empty tank and shall not be blended with other asphalt cements.
- (2) The mixture shall be designed using a mixing temperature of  $163 \pm 3 \degree C (325 \pm 5 \degree F)$ and a gyratory compaction temperature of  $152 \pm 3 \degree C (305 \pm 5 \degree F)$ .
- (3) Pneumatic-tired rollers will not be allowed unless otherwise specified by the Engineer. A vibratory roller meeting the requirements of Article 406.16 of the Standard Specifications shall be required in the absence of the pneumatic-tired roller.

### Laboratory Equipment.

- (a) Superpave Gyratory Compactor. The superpave gyratory compactor (SGC) shall be used for all QC/QA testing.
- (b) Ignition Oven. The ignition oven shall be used to determine the AC content. The ignition oven shall also be used to recover aggregates for all required washed gradations.

The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

<u>Mixture Design</u>. The Contractor shall submit mix designs, for approval, for each required mixture. Mix designs shall be developed by Level III personnel who have successfully completed the course, "Superpave Mix Design Upgrade". Articles 406.10 and 406.13 of the Standard Specifications shall not apply. The mixtures shall be designed according to the respective Illinois Modified AASHTO references listed below.

AASHTO MP 2 Standard Specification for Superpave Volumetric Mix Design

- AASHTO R 30 Standard Practice for Mixture Conditioning of Hot-Mix Asphalt (HMA)
- AASHTO PP 28 Standard Practice for Designing Superpave HMA
- AASHTO T 209 Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
- AASHTO T 312 Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the Superpave Gyratory Compactor
- AASHTO T 308 Determining the Asphalt Content of Hot Mix Asphalt (HMA) by the Ignition Method
  - (a) Mixture Composition. The ingredients of the bituminous mixture shall be combined in such proportions as to produce a mixture conforming to the composition limits by weight. The gradation mixture specified on the plans shall produce a mixture falling within the limits specified in Table 1.

TABLE 1. MIXTURE COMPOSITION (% PASSING) <sup>1/</sup>								
Sieve	e IL-25.0 mm		IL-25.0 mm IL-19.0 mm		IL-12.5 mm <sup>4/</sup>		IL-9.5 mm⁴′	
Size	min	max	min	max	Min	max	min	max
37.5 mm		100						
(1 1/2 in.)								
25 mm	90	100		100				
(1 in.)								
19 mm (3/4 in.)		90	82	100		100		
12.5 mm (1/2 in.)	45	75	50	85	90	100		100
9.5 mm						89	90	100
(3/8 in.) 4.75 mm				0/				
(#4)	24	42 <sup>2/</sup>	24	50 <sup>2/</sup>	28	65	28	65
2.36 mm (#8)	16	31	20	36	28	48 <sup>3/</sup>	28	48 <sup>3/</sup>
1.18 mm (#16)	10	22	10	25	10	32	10	32
600 μm (#30)								
300 μm (#50)	4	12	4	12	4	15	4	15
150 μm (#100)	3	9	3	9	3	10	3	10
75 μm (#200)	3	6	3	6	4	6	4	6

- 1/ Based on percent of total aggregate weight.
- 2/ The mixture composition shall not exceed 40 percent passing the 4.75 mm (#4) sieve for binder courses with Ndesign  $\ge$  90.
- 3/ The mixture composition shall not exceed 40 percent passing the 2.36 mm (#8) sieve for surface courses with Ndesign  $\ge$  90.
- 4/ The mixture composition for surface courses shall be according to IL-12.5 mm or IL-9.5 mm, unless otherwise specified by the Engineer.

One of the above gradations shall be used for leveling binder as specified in the plans and according to Article 406.04 of the Standard Specifications.

It is recommended that the selected combined aggregate gradation not pass through the restricted zones specified in Illinois Modified AASHTO MP 2.

- (b) Dust/AC Ratio for Superpave. The ratio of material passing the 75 μm (#200) sieve to total asphalt cement shall not exceed 1.0 for mixture design (based on total weight of mixture).
- (c) Volumetric Requirements. The target value for the air voids of the hot mix asphalt (HMA) shall be 4.0 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix and shall conform to the requirements listed in Table 2.

TABLE 2. VOLUMETRIC REQUIREMENTS					
	Voids in the Mineral Aggregate (VMA), % minimum				Voids Filled with Asphalt (VFA),
Ndesign	IL-25.0	IL-19.0	IL-12.5	IL-9.5	%
50					65 - 78
70	12.0	13.0	14.0	15	
90	12.0	13.0	14.0	10	65 - 75
105					

(d) Determination of Need for Anti-Stripping Additive. The mixture designer shall determine if an additive is needed in the mix to prevent stripping. The determination will be made on the basis of tests performed according to Illinois Modified T 283 using 4 in. Marshall bricks. To be considered acceptable by the Department as a mixture not susceptible to stripping, the ratio of conditioned to unconditioned split tensile strengths (TSRs) shall be equal to or greater than 0.75. Mixtures, either with or without an additive, with TSRs less than 0.75 will be considered unacceptable.

If it is determined that an additive is required, the additive may be hydrated lime, slaked quicklime, or a liquid additive, at the Contractor's option. The liquid additive shall be selected from the Department's list of approved additives and may be limited to those which have exhibited satisfactory performance in similar mixes.

Dry hydrated lime shall be added at a rate of 1.0 to 1.5 percent by weight of total dry aggregate. Slurry shall be added in such quantity as to provide the required amount of hydrated lime solids by weight of total dry aggregate. The exact rate of application for all anti-stripping additives will be determined by the Department. The method of application shall be according to Article 406.12 of the Standard Specifications.

<u>Personnel</u>. The QC Manager and Level I Technician shall have successfully completed the Department's "Superpave Field Control Course".

<u>Required Plant Tests</u>. Testing shall be conducted to control the production of the bituminous mixture. The Contractor shall use the test methods identified to perform the following mixture tests at a frequency not less than that indicated in Table 3.

TABLE 3. REQUIRED PLANT TESTS for SUPERPAVE			
Pa	arameter	Frequency of Tests	Test Method
Hot	ate Gradation bins for batch and tinuous plants	1 dry gradation per day of production (either morning or afternoon sample). And	Illinois Procedure (See Manual of Test Procedures for Materials).
Individual cold-feeds or combined belt-feed for drier drum plants.		1 washed ignition oven test on the mix per day of production (conduct in afternoon if dry gradation is conducted in the morning or vice versa).	
12.5 mn 4.75 mn 2.36 mn 600 μm	sing sieves: n (1/2 in.), n (No. 4), n (No. 8), (No. 30), No. 200))	NOTE. The order in which the above tests are conducted shall alternate from the previous production day (example: a dry gradation conducted in the morning will be conducted in the afternoon on the next production day and so forth).	
		The dry gradation and washed ignition oven test results shall be plotted on the same control chart.	
Asphalt Oven (I	Content by Ignition Note 1.)	1 per half day of production	Illinois Modified AASHTO T 308
Air Voids	Bulk Specific Gravity of Gyratory Sample	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	Illinois Modified AASHTO T 312
	Maximum Specific Gravity of Mixture		Illinois Modified AASHTO T 209

Note 1. The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

During production, the ratio of minus 75  $\mu$ m (#200) sieve material to total asphalt cement shall be not less than 0.6 nor more than 1.2 and the moisture content of the mixture at discharge from the mixer shall not exceed 0.5 percent. If at any time the ratio of minus 75  $\mu$ m (#200) material to asphalt or moisture content of the mixture falls outside the stated limits, production of the mix shall cease. The cause shall be determined and corrective action satisfactory to the Engineer shall be initiated prior to resuming production.

During production, mixtures containing an anti-stripping additive will be tested by the Department for stripping according to Illinois Modified T 283. If the mixture fails to meet the TSR criteria for acceptance, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria.

### Construction Requirements

#### Lift Thickness.

(a) Binder and Surface Courses. The minimum compacted lift thickness for constructing bituminous concrete binder and surface courses shall be according to Table 4:

TABLE 4 – MINIMUM COMPACTED LIFT THICKNESS			
Mixture	Thickness, mm (in.)		
IL-9.5	32 (1 1/4)		
IL-12.5	38 (1 1/2)		
IL-19.0	57 (2 1/4)		
IL-25.0	76 (3)		

(b) Leveling Binder. Mixtures used for leveling binder shall be as follows:

TABLE 5 – LEVELING BINDER			
Nominal, Compacted, Leveling	Mixture		
Binder Thickness, mm (in.)			
≤ 32 (1 1/4)	IL-9.5		
32 (1 1/4) to 50 (2)	IL 9.5 or IL-12.5		

Density requirements shall apply for leveling binder when the nominal, compacted thickness is 32 mm (1 1/4 in.) or greater for IL-9.5 mixtures and 38 mm (1 1/2 in.) or greater for IL-12.5 mixtures.

(c) Full-Depth Pavement. The compacted thickness of the initial lift of binder course shall be 100 mm (4 in.). The compacted thickness of succeeding lifts shall meet the minimums specified in Table 4 but not exceed 100 mm (4 in.).

If a vibratory roller is used for breakdown, the compacted thickness of the binder lifts, excluding the top lift, may be increased to 150 mm (6 in.) provided the required density is obtained.

(d) Bituminous Patching. The minimum compacted lift thickness for constructing bituminous patches shall be according to Table 4.

<u>Control Charts/Limits</u>. Control charts/limits shall be according to QC/QA Class I requirements, except density shall be plotted on the control charts within the following control limits:

TABLE 6. DENSITY CONTROL LIMITS			
Mixture	Parameter	Individual Test	
12.5 mm / 9.5 mm	Ndesign ≥ 90	92.0 - 96.0%	
12.5 mm / 9.5 mm	Ndesign < 90	92.5 - 97.4%	
19.0 mm / 25.0 mm	Ndesign ≥ 90	93.0 - 96.0%	
19.0 mm / 25.0 mm	Ndesign < 90	93.0 - 97.4%	

<u>Basis of Payment</u>. On resurfacing projects, this work will be paid for at the contract unit price per metric ton (ton) for BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On resurfacing projects in which polymer modifiers are required, this work will be paid for at the contract unit price per metric ton (ton) for POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On full-depth pavement projects, this work will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE PAVEMENT, (FULL-DEPTH), SUPERPAVE, of the thickness specified.

On projects where widening is constructed and the entire pavement is then resurfaced, the binder for the widening will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition, Ndesign, and thickness specified. The surface and binder used to resurface the entire pavement will be paid for according to the paragraphs above for resurfacing projects. 80010

## TEMPORARY PORTABLE BRIDGE TRAFFIC SIGNALS (BDE)

Effective: August 1, 2003

<u>Description</u>. At the Contractor's option, temporary portable bridge traffic signals may be used in place of temporary bridge traffic signals. Work shall be according to Article 701.06(b) of the Standard Specifications except as follows:

Materials. Materials shall meet the following Articles of Section 1000 – Materials:

Item	Article/Section
(a) Traffic Signal Head	
(b) Electric Cable	
(c) Controller	
(d) Controller Cabinet	
(e) Detector Loop	

## CONSTRUCTION REQUIREMENTS

<u>General</u>. The temporary portable bridge traffic signals shall be trailer-mounted units. The trailer-mounted units shall be set up securely and level. Each unit shall be self-contained and consist of two signal heads. The left signal head shall be mounted on a mast arm capable of extending over the travel lane. Each unit shall contain a solar cell system to facilitate battery charging. There shall be a minimum of 12 days backup reserve battery supply and the units shall be capable of operating with a 120 V power supply from a generator or electrical service.

All signal heads located over the travel lane shall be mounted at a minimum height of 5 m (17 ft) from the bottom of the signal back plate to the top of the road surface. All far right signal heads located outside the travel lane shall be mounted at a minimum height of 2.5 m (8 ft) from the bottom of the signal back plate to the top of the adjacent travel lane surface.

The long all red intervals for the traffic signal controller shall be adjustable up to 250 seconds in one-second increments.

As an alternative to detector loops, temporary portable bridge traffic signals may be equipped with microwave sensors or other approved methods of vehicle detection and traffic actuation. All portable traffic signal units shall be interconnected using hardwire communication cable or radio communication equipment. If radio communication is used, a site analysis shall be completed to ensure that there is no interference present that would affect the traffic signal operation. The radio equipment shall meet all applicable FCC requirements.

The temporary portable bridge traffic signal system shall meet the physical display and operational requirements of conventional traffic signals as specified in Part IV of the Manual on Uniform Traffic Control Devices (MUTCD). The signal system shall be designed to continuously operate over an ambient temperature range between -34 °C (-30 °F) and 48 °C (120 °F).

When not being utilized to inform and direct traffic, portable signals shall be treated as non-operating equipment according to Article 701.04(b)(3).

Basis of Payment. This work will be paid for according to Article 701.08(c).

80106

## TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: April 1, 1992

Revised: January 1, 2005

To ensure a prompt response to incidents involving the integrity of work zone traffic control, the Contractor shall provide a telephone number where a responsible individual can be contacted 24 hours-a-day.

When the Engineer is notified, or determines a traffic control deficiency exists, he/she will notify and direct the Contractor to correct the deficiency within a specified time. The specified time, which begins upon notification to the Contractor, will be from 1/2 hour to 12 hours based upon the urgency of the situation and the nature of the deficiency. The Engineer shall be the sole judge.

A deficiency may be any lack of repair, maintenance, or non-compliance with the traffic control plan. A deficiency may also be applied to situations where corrective action is not an option such as the use of non-certified flaggers for short term operations; working with lane closures beyond the time allowed in the contract; or failure to perform required contract obligations such as traffic control surveillance.

If the Contractor fails to correct a deficiency within the specified time, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The calendar day(s) will begin with notification to the Contractor and end with the Engineer's acceptance of the correction. The daily monetary deduction will be either \$1,000 or 0.05 percent of the awarded contract value, whichever is greater. For those deficiencies where corrective action was not an option this monetary deduction will be immediate.

In addition, if the Contractor fails to respond, the Engineer may correct the deficiency and the cost thereof will be deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities.

57291

## TRUCK BED RELEASE AGENT (BDE)

Effective: April 1, 2004

Add the following sentence after the third sentence of the first paragraph of Article 406.14 of the Standard Specifications.

"In addition to the release agent, the Contractor may use a light scatter of manufactured sand (FA 20 or FA 21) evenly distributed over the bed of the vehicle." 80123

## WEIGHT CONTROL DEFICIENCY DEDUCTION

Effective: April 1, 2001 Revised: August 1, 2002

The Contractor shall provide accurate weights of materials delivered to the contract for incorporation into the work (whether temporary or permanent) and for which the basis of payment is by weight. These weights shall be documented on delivery tickets which shall identify the source of the material, type of material, the date and time the material was loaded, the contract number, the net weight, the tare weight when applicable and the identification of the

transporting vehicle. For aggregates, the Contractor shall have the driver of the vehicle furnish or establish an acceptable alternative to provide the contract number and a copy of the material order to the source for each load. The source is defined as that facility that produces the final material product that is to be incorporated into the contract pay items.

The Department will conduct random, independent vehicle weight checks for material sources according to the procedures outlined in the Documentation Section Policy Statement of the Department's Construction Manual and hereby incorporated by reference. The results of the independent weight checks shall be applicable to all contracts containing this Special Provision. Should the vehicle weight check for a source result in the net weight of material on the vehicle exceeding the net weight of material shown on the delivery ticket by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. No adjustment in pay quantity will be made. Should the vehicle weight check for a source result in the net weight of material shown on the delivery ticket exceeding the net weight of material on the vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. The Engineer will adjust the net weight shown on the delivery ticket to the checked delivered net weight as determined by the independent vehicle weight check.

The Engineer will also adjust the method of measurement for all contracts for subsequent deliveries of all materials from the source based on the independent weight check. The net weight of all materials delivered to all contracts containing this Special Provision from this source, for which the basis of payment is by weight, will be adjusted by applying a correction factor "A" as determined by the following formula:

$$A = 1.0 - \left(\frac{B-C}{B}\right); \text{ Where } A \le 1.0; \ \left(\frac{B-C}{C}\right) > 0.50\% \text{ (0.70\% for aggregates)}$$

Where A = Adjustment factor

B = Net weight shown on delivery ticket

C = Net weight determined from independent weight check

The adjustment factor will be applied as follows:

Adjusted Net Weight =  $A \times Delivery Ticket Net Weight$ 

The adjustment factor will be imposed until the cause of the deficient weight is identified and corrected by the Contractor to the satisfaction of the Engineer. If the cause of the deficient weight is not identified and corrected within seven (7) calendar days, the source shall cease delivery of all materials to all contracts containing this Special Provision for which the basis of payment is by weight.

Should the Contractor elect to challenge the results of the independent weight check, the Engineer will continue to document the weight of material for which the adjustment factor would be applied. However, provided the Contractor furnishes the Engineer with written

documentation that the source scale has been calibrated within seven (7) calendar days after the date of the independent weight check, adjustments in the weight of material paid for will not be applied unless the scale calibration demonstrates that the source scale was not within the specified Department of Agriculture tolerance.

At the Contractor's option, the vehicle may be weighed on a second independent Department of Agriculture certified scale to verify the accuracy of the scale used for the independent weight check.

80048

### WORK ZONE TRAFFIC CONTROL DEVICES (BDE)

Effective: January 1, 2003

Revised: November 1, 2004

Add the following to Article 702.01 of the Standard Specifications:

"All devices and combinations of devices shall meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350 for their respective categories. The categories are as follows:

Category 1 includes small, lightweight, channelizing and delineating devices that have been in common use for many years and are known to be crashworthy by crash testing of similar devices or years of demonstrable safe performance. These include cones, tubular markers, flexible delineators and plastic drums with no attachments. Category 1 devices shall be crash tested and accepted or may be self-certified by the manufacturer.

Category 2 includes devices that are not expected to produce significant vehicular velocity change but may otherwise be hazardous. These include drums and vertical panels with lights, barricades and portable sign supports. Category 2 devices shall be crash tested and accepted for Test Level 3.

Category 3 includes devices that are expected to cause significant velocity changes or other potentially harmful reactions to impacting vehicles. These include crash cushions, truck mounted attenuators and other devices not meeting the definitions of Category 1 or 2. Category 3 devices shall be crash tested and accepted for either Test Level 3 or the test level specified.

Category 4 includes portable or trailer-mounted devices such as arrow boards, changeable message signs, temporary traffic signals and area lighting supports. Currently, there is no implementation date set for this category and it is exempt from the NCHRP 350 compliance requirement.

The Contractor shall provide a manufacturer's self-certification letter for each Category 1 device and an FHWA acceptance letter for each Category 2 and Category 3 device used on the contract. The letters shall state the device meets the NCHRP 350 requirements for its respective category and test level, and shall include a detail drawing of the device."

Delete the third, fourth and fifth paragraphs of Article 702.03(b) of the Standard Specifications.

Delete the third sentence of the first paragraph of Article 702.03(c) of the Standard Specifications.

Revise the first sentence of the first paragraph of Article 702.03(e) of the Standard Specifications to read:

"Drums shall be nonmetallic and have alternating reflectorized Type AA or Type AP fluorescent orange and reflectorized white horizontal, circumferential stripes."

Add the following to Article 702.03 of the Standard Specifications:

"(h) Vertical Barricades. Vertical barricades may be used in lieu of cones, drums or Type II barricades to channelize traffic."

Delete the fourth paragraph of Article 702.05(a) of the Standard Specifications.

Revise the sixth paragraph of Article 702.05(a) of the Standard Specifications to read:

"When the work operations exceed four days, all signs shall be post mounted unless the signs are located on the pavement or define a moving or intermittent operation. When approved by the Engineer, a temporary sign stand may be used to support a sign at 1.2 m (5 ft) minimum where posts are impractical. Longitudinal dimensions shown on the plans for the placement of signs may be increased up to 30 m (100 ft) to avoid obstacles, hazards or to improve sight distance, when approved by the Engineer. "ROAD CONSTRUCTION AHEAD" signs will also be required on side roads located within the limits of the mainline "ROAD CONSTRUCTION AHEAD" signs."

Delete all references to "Type 1A barricades" and "wing barricades" throughout Section 702 of the Standard Specifications.

80097

#### WORKING DAYS (BDE)

Effective: January 1, 2002

The Contractor shall complete the work within 30 working days.

80071

#### DECK SLAB REPAIR

Effective: May 15, 1995 Revised: December 12, 2005

This work shall consist of bituminous surface removal, when required, the removal and disposal of all loose and deteriorated concrete from bridge deck and the replacement with new concrete to the original top of deck. The work shall be done according to the applicable requirements of

Sections 501, 503 and 1020 of the Standard Specifications and this Special Provision.

Deck slab repairs will be classified as follows:

(a) Partial-Depth. Partial-depth repairs shall consist of removing the loose and unsound deck concrete, disposing of the concrete removed and replacing with new concrete. The removal may be performed by chipping with power driven hand tools or by hydro-scarification equipment. The depth shall be measured from the top of the concrete deck surface, at least 20 mm (3/4 in.) but not more than 1/2 the concrete deck thickness.

(b) Full-Depth. Full-depth repairs shall consist of removing concrete full-depth of the deck, disposing of the concrete removed, and replacing with new concrete to the original concrete deck surface. The removal may be performed with power driven hand tools or by hydro-scarification equipment. Full-depth repairs shall be classified for payment as Full-Depth, Type I and Full-Depth, Type II according to the following:

Type I Full-depth patches less than or equal to 0.5 sq m (5 sq ft) in area. The minimum dimensions for a patch shall be 300 mm x 300 mm (1 ft X 1 ft).

Type II Full-depth patches greater than 0.5 sq m (5 sq ft) in area.

#### Materials.

Materials shall be according to Article 1020.02.

Portland cement concrete for partial and full-depth repairs shall be according to Section 1020. Class PP-1, PP-2, PP-3, PP-4, or BD concrete shall be used at the Contractor's option. For Class BD concrete, a CA 13, 14, or 16 shall be used.

Grout. The grout for bonding new concrete to old concrete shall be proportioned by mass (weight) and mixed at the job site, or it may be ready-mixed if agitated while at the job site. The bonding grout shall consist of one part portland cement and one part sand, mixed with sufficient water to form a slurry. The bonding grout shall have a consistency allowing it to be scrubbed onto the prepared surface with a stiff brush or broom leaving a thin, uniform coating that will not run or puddle in low spots. Grout that can not be easily and evenly applied or has lost its consistency may be rejected by the Engineer. Grout that is more than two hours old shall not be used.

#### Equipment:

The equipment used shall be subject to the approval of the Engineer and shall meet the following requirements:

(a) Surface Preparation Equipment. Surface preparation and concrete removal equipment shall be according to the applicable portions of Section 1100 and the following:

(1) Sawing Equipment. Sawing equipment shall be a concrete saw capable of sawing concrete to the specified depth.

(2) Blast Cleaning Equipment. The blast cleaning may be performed by wet sandblasting, high-pressure waterblasting, shotblasting or abrasive blasting. Blast cleaning equipment shall be capable of removing rust and old concrete from exposed reinforcement bars, and shall have oil traps.

(3) Power-Driven Hand Tools. Power-driven hand tools will be permitted including jackhammers lighter than the nominal 20 kg. (45 lb) class. Chipping hammers heavier than a nominal 6.8 kg. (15 lb) class shall not be used for removing concrete from below any reinforcing bar for partial depth repairs or final removal at the boundary of full-depth repairs. Jackhammers or chipping hammers shall not be operated at an angle in excess of 45 degrees measured from the surface of the slab.

(4) Hydro-Scarification Equipment. The hydro-scarification equipment shall consist of filtering and pumping units operating with a remote-controlled robotic device. The equipment may use river, stream or lake water. Operation of the equipment shall be performed and supervised by qualified personnel certified by the equipment manufacturer. Evidence of certification shall be presented to the Engineer. The equipment shall be capable of removing concrete to the specified depth and removing rust and concrete particles from exposed reinforcing bars. Hydro-scarification equipment shall be calibrated before being used and shall operate at a minimum of 124 MPa (18,000 psi).

(b) Concrete Equipment: Equipment for proportioning and mixing the concrete shall be according to Article 1020.03.

(c) Finishing Equipment: Finishing equipment shall be according to Article 1103.17. Adequate hand tools will be permitted for placing and consolidating concrete in the patch areas and for finishing small patches.

<u>Construction Requirements:</u> Sidewalks, curbs, drains, reinforcement and/or existing transverse and longitudinal joints which are to remain in place shall be protected from damage during removal and cleaning operations. All damage caused by the Contractor shall be corrected, at the Contractor's expense, to the satisfaction of the Engineer.

The Contractor shall control the runoff water generated by the various construction activities in such a manner as to minimize, to the maximum extent practicable, the discharge of construction debris into adjacent waters, and shall properly dispose of the solids generated according to Article 202.03. Runoff water will not be allowed to constitute a hazard on adjacent or underlying roadways, waterways, drainage areas or railroads nor be allowed to erode existing slopes.

(a) Bituminous Surface Removal.

The bituminous concrete surface course and all waterproofing membrane shall be removed and disposed of according to applicable portions of Articles 440.03 and 440.06, except milling equipment will not be allowed if the deck is to receive a waterproofing membrane system. If the overlay or waterproofing membrane contains asbestos fibers, removal shall be in accordance with the Special Provision for "Asbestos Waterproofing Membrane or Asbestos Bituminous Concrete Surface Removal". Removal of the bituminous surface by the use of radiant or direct heat will not be permitted.

(b) Surface Preparation:

All loose, disintegrated and unsound concrete shall be removed from portions of the deck slab shown on the plans or as designated by the Engineer. The Engineer will determine the limits of removal as the work progresses.

The Contractor shall take care not to damage reinforcement bars or expansion joints which are to remain in place. Any damage to reinforcement bars or expansion joints shall be corrected at the Contractor's expense. All loose reinforcement bars, as determined by the Engineer, shall be retied at the Contractor's expense.

(1) Partial-Depth. Areas to be repaired will be determined and marked by the Engineer. A concrete saw shall be used to provide vertical edges approximately 20 mm (3/4 in.) deep around the perimeter of the area to be patched when an overlay is not specified. Where high steel is present, the depth may be reduced as directed by the Engineer. A saw cut will not be required on those boundaries along the face of the curb, parapet or joint or when sharp vertical edges are provided by hydroscarification.

The loose and unsound concrete shall be removed by chipping, with power driven hand tools or by hydro-scarification equipment. All exposed reinforcing bars and newly exposed concrete shall be thoroughly blast cleaned. Where, in the judgment of the Engineer, the bond between existing concrete and reinforcement steel within the patch area has been destroyed, the concrete adjacent to the bar shall be removed to a depth that will permit new concrete to bond to the entire periphery of the exposed bar. A minimum of 25 mm (1 in.) clearance will be required. The Engineer may require enlarging a designated removal area should inspection indicate deterioration beyond the limits previously designated. In this event, a new saw cut shall be made around the extended area before additional removal is begun. The removal area shall not be enlarged solely to correct debonded reinforcement or deficient lap lengths.

(2) Full-Depth. Concrete shall be removed as determined by the Engineer within all areas designated for full-depth repair and in all designated areas of partial depth repair in which unsound concrete is found to extend below half the concrete deck thickness. Full depth removal shall be performed according to Article 501.03. Saw cuts shall be made on the top of the deck, except those boundaries along the face of curbs, parapets and joints or where hydro-scarification provided sharp vertical edges. The top saw cut may be omitted if the deck is to receive an overlay.

Forms for full-depth repair may be supported by hangers with adjustable bolts or by blocking from the beams below. When approved by the Engineer, forms for Type 1 patches may be supported by No. 9 wires or other devices attached to the reinforcement bars.

All form work shall be removed after the curing sequence is complete and prior to opening to traffic.

(3) Reinforcement Treatment. Care shall be exercised during concrete removal to protect the reinforcement bars and structural steel from damage. Any damage to the reinforcement bars or structural steel to remain in place shall be repaired or replaced to the satisfaction of the Engineer at the Contractor's expense. All existing reinforcement bars shall remain in place except as herein provided for corroded bars. Tying of loose bars will be required. Reinforcing bars which have been cut or have lost 25 percent or more of their original cross sectional area shall be supplemented by new in kind reinforcement bars. New bars shall be lapped a minimum of 32 bar diameters to existing bars. An approved mechanical bar splice capable of developing in tension at least 125 percent of the yield strength of the existing bar shall be used when it is not feasible to provide the minimum bar lap. No welding of bars will be permitted.

(4) Cleaning. Immediately after completion of the concrete removal and reinforcement repairs, the repair areas shall be cleaned of dust and debris. Once the initial cleaning is completed, the repair areas shall be thoroughly blast cleaned to a roughened appearance free from all foreign matter. Particular attention shall be given to removal of concrete fines. Any method of cleaning which does not consistently produce satisfactory results shall be discontinued and replaced by an acceptable method. All debris, including water, resulting from the blast cleaning shall be confined and shall be immediately and thoroughly removed from all areas of accumulation. If concrete placement does not follow immediately after the final cleaning, the area shall be carefully protected with well-anchored polyethylene sheeting.

Exposed reinforcement bars shall be free of dirt, detrimental scale, paint, oil, or other foreign substances which may reduce bond with the concrete. A tight non-scaling coating of rust is not considered objectionable. Loose, scaling rust shall be removed by rubbing with burlap, wire brushing, blast cleaning or other methods approved by the Engineer.

(c) Placement & Finishing of Concrete Repair:

(1) Grout Placement. After the repair areas have been cleaned and immediately prior to concrete placement, the grout shall be applied to a dampened surface. A thin layer of grout shall be thoroughly scrubbed into the deck surface. All vertical as well as horizontal surfaces shall receive a thorough, even coating. The rate of grout placement shall be limited so the brushed grout does not dry out before it is covered with concrete. Grout that has become dry and chalky shall be blast cleaned and replaced at the Contractor's expense. No concrete shall be placed over dry grout.

(2) Concrete Placement.

The concrete shall be placed and consolidated according to Article 503.07 and as herein specified. Article 1020.14 (b) shall apply, except for the requirement to use an approved retarding admixture when the plastic concrete reaches 30°C (85°F).

When an overlay system is not specified, the patches shall be finished according to Article 503.17 (c)(2)a., followed by a light brooming.

#### (d) Curing and Protection.

Concrete patches shall be cured by the Wetted Burlap or Wetted Cotton Mat Method according to Article 1020.13 (a)(3). The curing period shall be 3 days for Class PP-1, PP-2, PP-3, and PP-4 concrete. The curing period shall be 7 days for Class BD concrete. In addition to Article 1020.13, when the air temperature is less than 13° C (55° F), the Contractor shall cover the patch with minimum R12 insulation. Insulation is optional when the air temperature is 13° C - 32° C (55° F. - 90° F). Insulation shall not be placed when the air temperature is greater than 32° C (90° F). A 72-hour minimum drying period shall be required before placing waterproofing or bituminous surfacing.

(e) Opening to Traffic.

No traffic will be permitted on a patch until after the specified cure period, and the concrete has obtained a minimum compressive strength of 27.6 MPa (4000 psi) or flexural strength of 4.65 MPa (675 psi).

Construction equipment will be permitted on a patch during the cure period if the concrete has obtained the minimum required strength. In this instance, the strength specimens shall be cured with the patch.

#### Method of Measurement.

When specified, bituminous surface removal and full or partial depth repairs will be measured for payment and computed in square meters (square yards).

#### Basis of Payment.

The bituminous concrete surface removal will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE REMOVAL (DECK). Areas removed and replaced up to and including a depth of half the concrete deck thickness will be paid for at the contract unit price per square meter (square yard) for DECK SLAB REPAIR (PARTIAL). Areas requiring removal greater than a depth of half the concrete deck thickness shall be removed and replaced full depth and will be paid for at the contract unit price per square meter (square yard) for DECK SLAB REPAIR (FULL DEPTH, TYPE I) and/or DECK SLAB REPAIR (FULL DEPTH, TYPE II).

When corroded reinforcement bars are encountered in the performance of this work and replacement is required, the Contractor will be paid according to Article 109.04.

No payment will be allowed for removal and replacement of reinforcement bars damaged by the Contractor in the performance of his/her work or for any increases in dimensions needed to provide splices for these replacement bars.

Removal and disposal of asbestos waterproofing and/or asbestos bituminous concrete will be paid for as specified in the Special Provision for "Asbestos Waterproofing Membrane or Asbestos Bituminous Concrete Surface Removal".

#### BRIDGE DECK MICROSILICA CONCRETE OVERLAY

Effective: May 15, 1995 Revised: December 12, 2005

<u>Description</u>. This work shall consist of the preparation of the existing concrete bridge deck and the construction of a microsilica concrete overlay to the specified thickness. The minimum thickness of the overlay shall be 60 mm (2 1/4 in.).

Materials. Materials shall meet the requirements of the following Articles of Section 1000:

Item

Article/Section

(a) Microsilica 1014
(b) Portland Cement (Notes 1-6) 1020
(c) Grout (Note 7)
(d) Rapid Set Materials (Note 8)
(e) Concrete Curing Materials (Note 9)

- Note 1: Cement shall be Type I portland cement. Fine aggregate shall be natural sand and the coarse aggregate shall be crushed stone or crushed gravel. The gradation of the coarse aggregate shall be CA 11, CA 13, CA 14 or CA 16.
- Note 2: Mix Design Criteria.

Article 1020.04 shall not apply. The microsilica concrete mix design shall meet the following requirements: Cement Factor 335 kg/cu m (565 lb/cu yd) Microsilica Solids 20 kg/cu m (33 lb/cu yd) Water/Cement Ratio 0.37 to 0.41

(including water in the slurry) Mortar Factor 0.88 to 0.92Slump 75 to 150 mm (3 to 6

in.) Air Content 5.0 to 8.0 percent Compressive Strength (14 days) 27,500 kPa (4000

psi ) minimum Flexural Strength (14 days) 4,650 kPa (675 psi) minimum

Note 3: Admixtures.

Article 1020.05(b) shall apply except as follows: High-range water reducing admixtures (superplasticizers) shall be added as determined by the Engineer.

Note 4: Fly Ash. Article 1020.05(c) shall apply except as follows: Only Class C fly ash may be

used to partially replace portland cement. The amount of

cement replaced and replacement ratio

shall be the same as for bridge decks. Note 5:

Ground Granulated Blast-Furnace Slag. Ground

granulated blast-furnace slag shall not be used.

Note 6: Mixing. The mixing requirements shall be

#### according to Article 1020.11(d), except

as follows:

(a) Water-based microsilica slurry:

(1) Truck Mixer:

Combine simultaneously air entraining admixture, water-reducing admixture and/or retarding admixture, microsilica slurry and 80 percent of the water with cement, fly ash (if used) and aggregates.

Add remaining water.

Mix 30-40 revolutions at 12-15 RPM.

Add high range water-reducing admixture.

Mix 60-70 revolutions at 12-15 RPM.

(2) Stationary Mixer:

The microsilica slurry shall be diluted into the water stream or weigh box prior to adding into mixer. Combine simultaneously air entraining admixture, water-reducing admixture and/or retarding admixture, microsilica slurry and 80 percent of the water with cement, fly ash (if used) and aggregates.

Add remaining water.

After mixing cycle is completed deposit into truck mixer.

Add high range water-reducing admixture.

Mix 60-70 revolutions at 12-15 RPM.

(b) Densified microsilica (bulk):

(1) Truck Mixer:

• Same as (a)1 above except the densified microsilica shall be added with the cement.

(2) Stationary Mixer:

• Same as (a)2 above except the densified microsilica shall be added with the cement.

(c) Densified microsilica (bag): Bagged microsilica shall be kept dry. No bag or material containing moisture shall be introduced into the concrete mixer.

(1) Truck Mixer:

Combine air entraining admixture, water-reducing admixture and/or retarding admixture and 80 percent of the water.

Add cement, fly ash (if used), and aggregates.

Add remaining water.

Mix 30-40 revolutions at 12-15 RPM.

Add microsilica.

Mix 70-80 revolutions at 12-15 RPM.

Add high range water-reducing admixture.

Mix 60-70 revolutions at 12-15 RPM.

(2) Stationary Mixer:

Combine air entraining admixture, water-reducing admixture and/or retarding admixture and 80% of the water.

Add cement, fly ash (if used), and aggregates.

Add remaining water.

After mixing cycle is completed deposit into truck mixer.

Add microsilica to truck. Mix 70-80 revolutions at 12-15 RPM. Add high range water-reducing admixture. Mix 60-70 revolutions at 12-15 RPM.

Note 7: Grout. The grout for bonding new concrete to old concrete shall be proportioned by mass (weight) and mixed at the job site, or it may be ready-mixed if agitated while at the job site. The bonding grout shall consist of one part portland cement and two parts sand, mixed with sufficient water to form a slurry. The bonding grout shall have a consistency allowing it to be scrubbed onto the prepared surface with a stiff brush or broom leaving a thin, uniform coating that will not run or puddle in low spots. Grout that can not be easily and evenly applied or has lost its consistency may be rejected by the Engineer. Grout that is more than two hours old shall not be used.

At the option of the Contractor the grout may be applied by mechanical applicators. If this option is chosen, the sand shall be eliminated from the grout mix.

- Note 8: Rapid set materials shall be obtained from the Department's approved list of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs.
- Note 9: Cotton mats shall consist of a cotton fill material, minimum 400 g/sq m (11.8 oz/sq yd), covered with unsized cloth or burlap, minimum 200 g/sq m (5.9 oz/sq yd), and be tufted or stitched to maintain stability. Cotton mats shall be free from tears and in good condition.

<u>Equipment:</u> The equipment used shall be subject to the approval of the Engineer and shall meet the following requirements:

(a) Surface Preparation Equipment. Surface preparation equipment shall be according to the applicable portions of Section 1100 and the following:

(1) Sawing Equipment. Sawing equipment shall be a concrete saw capable of sawing concrete to the specified depth.

(2) Mechanical Blast Cleaning Equipment. Mechanical blast cleaning may be performed by high-pressure waterblasting or shotblasting. Mechanical blast cleaning equipment shall be capable of removing weak concrete at the surface, including the microfractured concrete surface layer remaining as a result of mechanical scarification, and shall have oil traps.

Mechanical high-pressure waterblasting equipment shall be mounted on a wheeled carriage and shall include multiple nozzles mounted on a rotating assembly. The distance between the nozzles and the deck surface shall be kept constant and the wheels shall maintain contact with the deck surface during operation.

(3) Hand-Held Blast Cleaning Equipment. Blast cleaning using hand-held equipment may be performed by high-pressure waterblasting or abrasive blasting. Hand-held blast cleaning equipment shall have oil traps.

Hand-held high-pressure waterblasting equipment that is used in areas inaccessible to mechanical blast cleaning equipment shall have a minimum pressure of 48 MPa (7,000 psi).

(4) Mechanical Scarifying Equipment. Scarifying equipment shall be a poweroperated, mechanical scarifier capable of uniformly scarifying or removing the old concrete surface and new patches to the depths required in a satisfactory manner. Other types of removal devices may be used if their operation is suitable and they can be demonstrated to the satisfaction of the Engineer. (5) Hydro-Scarification Equipment. The hydro-scarification equipment shall consist of filtering and pumping units operating with a computerized, self-propelled robotic machine with gauges and settings that can be easily verified. The equipment shall use potable water according to Section 1002. Operation of the equipment shall be

performed and supervised by qualified personnel certified by the equipment manufacturer. Evidence of certification shall be presented to the Engineer. The equipment shall be capable of removing concrete to the specified depth and be capable of removing rust and old concrete particles from exposed reinforcement bars. The hydro-scarification equipment shall be calibrated before being used and shall operate at a uniform pressure sufficient to remove the specified depth of concrete in a timely manner.

(6) Vacuum Cleanup Equipment. The equipment shall be equipped with fugitive dust control devices capable of removing wet debris and water all in the same pass. Vacuum equipment shall also be capable of washing the deck with pressurized water prior to the vacuum operation to dislodge all debris and slurry from the deck surface.

(7) Power-Driven Hand Tools. Power-driven hand tools will be permitted including jackhammers lighter than the nominal 20 kg. (45 lb) class. Jackhammers or chipping hammers shall not be operated at an angle in excess of 45 degrees measured from the surface of the slab.

(b) Pull-off Test Equipment. Equipment used to perform pull-off testing shall be either approved by the Engineer, or obtained from one of the following approved sources:

James Equipment Germann Instruments, Inc. 007 Bond Tester BOND-TEST Pull-off System 800-426-6500 847-329-9999

SDS Company DYNA Pull-off Tester 805-238-3229

Pull-off test equipment shall include all miscellaneous equipment and materials to perform the test and clean the equipment, as indicated in the Illinois Test Procedures 304 and 305 "Pull-off Test (Surface or Overlay Method)". Prior to the start of testing, the Contractor shall submit to the Engineer a technical data sheet and material safety data sheet for the epoxy used to perform the testing. For solvents used to clean the equipment, a material safety data sheet shall be submitted.

(c) Concrete Equipment. Equipment for proportioning and mixing the concrete shall be according to Article1020.03.

(d) Finishing Equipment. Finishing equipment shall be according to Article 503.03.

(e) Mechanical Fogging Equipment. Mechanical fogging equipment shall consist of a mechanically operated, pressurized system using a triple headed nozzle or an equivalent nozzle. The fogging nozzle shall be capable of producing a fine fog mist that will increase the relative humidity of the air just above the fresh concrete surface without accumulating any water on the concrete. The fogging equipment shall be mounted on

either the finishing equipment or a separate foot bridge. Controls shall be designed to vary the volume of water flow, be easily accessible and immediately shut off the water when in the off position.

(f) Hand-Held Fogging Equipment. Hand-held fogging equipment shall use a triple headed nozzle or an equivalent nozzle. The fogging nozzle shall be capable of producing a fine fog mist that will increase the relative humidity of the air just above the fresh concrete surface without accumulating any water on the concrete.

<u>Construction Requirements:</u> Sidewalks, curbs, drains, reinforcement and/or existing transverse and longitudinal joints which are to remain in place shall be protected from damage during scarification and cleaning operations. All damage caused by the Contractor shall be corrected, at the Contractor's expense, to the satisfaction of the Engineer.

The Contractor shall control the runoff water generated by the various construction activities in such a manner as to minimize, to the maximum extent practicable, the discharge of construction debris into adjacent waters, and shall properly dispose of the solids generated according to Article 202.03. Runoff water will not be allowed to constitute a hazard on adjacent or underlying roadways, waterways, drainage areas or railroads nor be allowed to erode existing slopes.

- (a) Deck Preparation:
  - (1) Bridge Deck Scarification. The scarification work shall consist of removing the designated concrete deck surface using mechanical or hydro-scarifying equipment as specified. The areas designated shall be scarified uniformly to the depth as specified on the plans. In areas of the deck not accessible to the scarifying equipment, power-driven hand tools will be permitted. Power driven hand tools shall be used for removal around areas to remain in place.

A trial section on the existing deck surface will be designated by the Engineer to demonstrate that the equipment, personnel and methods of operation are capable of producing results satisfactory to the Engineer. The trial section will consist of approximately 3 sq m (30 sq ft).

Once the settings for the equipment are established, they shall not be changed without the permission of the Engineer. The removal shall be verified, as necessary, at least every 5 m (16 ft) along the cutting path. If sound concrete is being removed below the desired depth, the equipment shall be reset or recalibrated.

If the use of hydro-scarification equipment is specified, the Contractor may use mechanical scarification equipment to remove an initial depth of concrete provided that the last 6 mm (1/4 in.) of removal is accomplished with hydro-scarification equipment. If the Contractor's use of mechanical scarifying equipment results in exposing, snagging, or dislodging the top mat of reinforcing steel, the scarifying shall be stopped immediately and the remaining removal shall be accomplished using the hydro-scarification equipment. All damage to the existing reinforcement resulting from the Contractor's operation shall be repaired or replaced at the Contractor's expense as directed by the Engineer. Replacement shall include the removal of any additional concrete required to position or splice the new reinforcing steel. Undercutting of exposed reinforcement bars shall only be as required to replace or repair damaged or corroded reinforcement. Repairs to existing reinforcement shall be according to the Special Provision for "Deck Slab Repair".

After hydro-scarification the deck shall be vacuum cleaned in a timely manner before the water and debris are allowed to dry and re-solidify to the deck. The uses of alternative cleaning and debris removal methods to minimize driving heavy vacuum equipment over exposed deck reinforcement may be used subject to the approval of the Engineer.

(2) Deck Patching. After bridge deck scarification, all designated patching, except as note below, shall be completed according to the Special Provision for "Deck Slab Repair". All full depth patching shall be completed prior to final surface preparation. When mechanical scarification is specified, partial depth patches may be fill with overlay material at the time of overlay placement.

All patches placed prior to overlay placement shall be struck off and then roughened with a suitable stiff bristled broom or wire brush to provide a rough texture designed to promote bonding of the overlay. Hand finishing of the patch surface shall be kept to a minimum to prevent overworking of the surface.

After scarification, the deck shall be thoroughly cleaned of broken concrete and other debris. The Engineer will sound the scarified deck and all remaining unsound areas will be marked for additional removal and/or repairs as applicable. If the bottom mat of reinforcement is exposed, that area shall be defined as a full depth repair.

In areas where hydro-scarification is specified, No separate payment for partial depth patching will be made regardless of whether it was detailed in the plans or not. Just prior to performing hydro-scarification, the deck shall be sounded, with unsound areas marked on the deck to assist the hydro-scarification process in performing the partial depth removal simultaneously with the hydro-scarification operation. If in the opinion of the Engineer additional removal is required after the hydro-scarifications to the scarification process, such removal shall be paid for according to Article 109.04. Any removal required or made below the specified depth for scarification of the bridge deck, which does not result in full depth patching, shall be filled with the overlay material at the time of the overlay placement.

(3) Final Surface Preparation. Final surface preparation shall consist of the operation of mechanical blast cleaning equipment to remove any weak concrete at the surface, including the microfractured concrete surface layer remaining as a result of mechanical scarification. Any areas determined by the Engineer to be inaccessible to mechanical equipment shall be thoroughly blast cleaned with hand-held equipment. When hydro-scarification equipment is used for concrete removal, the deck surface need not be blast cleaned with mechanical equipment unless the spoils from the scarification operation are allowed to dry and resolidify on the deck surface.

Final surface preparation shall also include the cleaning of all dust, debris, and concrete fines from the deck surface including vertical faces of curbs, previously placed adjacent overlays, barrier walls up to a height of 25 mm (1 in.) above the overlay, depressions, and beneath reinforcement bars. Hand-held high-pressure waterblasting equipment shall be used for this operation.

If mechanical scarification is used to produce the final deck surface texture, surface pull-off testing will be required. After the final surface preparation has been completed and before placement of the overlay, the prepared deck surface will be tested by the Engineer according to the Illinois Test Procedure 304 "Pull-off Test (Surface Method)". The Contractor shall provide the test equipment.

a. Start-up Testing. Prior to the first overlay placement, the Engineer will evaluate the blast cleaning method. The start-up area shall be a minimum of 56 sq m (600 sq ft). After the area has been prepared, six random test locations will be determined by the Engineer, and tested according to the Illinois Test Procedure 304 "Pull-off Test (Surface Method)".

The average of the six tests shall be a minimum of 1,207 kPa (175 psi) and each individual test shall have a minimum strength of 1,103 kPa (160 psi). If the criteria are not met, the Contractor shall adjust the blast cleaning method. Start-up testing will be repeated until satisfactory results are attained.

Once an acceptable surface preparation method is established, it shall be continued for the balance of the work. The Contractor may, with the permission of the Engineer, change the surface preparation method, in which case, additional start-up testing will be required.

b. Lot Testing. After start-up testing has been completed, the following testing frequency will be used. For each structure, each stage will be divided into lots of not more than 420 sq m (4500 sq ft). Three random test locations will be determined by the Engineer for each lot, and tested according to the Illinois Test procedure 304 "Pull-off Test (Surface Method)".

The average of the three tests shall be a minimum of 1,207 kPa (175 psi) and each individual test shall have a minimum strength of 1,103 kPa (160 psi). In the case of a failing individual test or a failing average of three tests, the Engineer will determine the area that requires additional surface preparation by the Contractor. Additional test locations will be determined by the Engineer.

In addition to start-up and lot testing, the Department may require surface pull-off testing of areas inaccessible to mechanical blast cleaning equipment and blast cleaned with hand-held equipment. The Engineer shall determine each test location, and each individual test shall have a minimum strength of 1,207 kPa (175 psi).

Exposed reinforcement bars shall be free of dirt, detrimental scale, paint, oil, and other foreign substances which may reduce bond with the concrete. A tight non-scaling coating of rust is not considered objectionable. Loose, scaling rust shall be removed by rubbing with burlap, wire brushing, blast cleaning or other methods approved by the Engineer. All loose reinforcement bars, as determined by the Engineer, shall be retied at the Contractor's expense.

All dust, concrete fines, debris, including water, resulting from the surface preparation shall be confined and shall be immediately and thoroughly removed from all areas of accumulation. If concrete placement does not follow immediately after the final surface preparation, the area shall be carefully protected with well-anchored white polyethylene sheeting.

(b) Pre-placement Procedure. Prior to placing the overlay, the Engineer will inspect the deck surface. All contaminated areas shall be blast cleaned again at the Contractor's expense.

Before placing the overlay, the finishing machine shall be operated over the full length of bridge segment to be overlaid to check support rails for deflection and confirm the minimum overlay thickness. All necessary adjustments shall be made and another check performed, unless otherwise directed by the Engineer.

(c) Placement Procedure:

- (1) Bonding Methods. The Contractor shall prepare the deck prior to overlay placement by one of the following methods unless restricted as specified on the plans:
  - a. Grout Method. The deck shall be cleaned to the satisfaction of the Engineer and shall be thoroughly wetted and maintained in a dampened condition for at least 12 hours before placement of the grout is started. Any excess water shall be removed by compressed air or by vacuuming prior to grout placement. Water shall not be applied to the deck surface within one hour before or at any time during placement of the grout. Immediately before placing the overlay mixture, the exposed area shall be thoroughly covered with a thin layer of grout. The grout shall be thoroughly scrubbed into the surface. All vertical as well as horizontal surfaces shall receive a thorough, even coating. The rate of grout placement shall be limited so the brushed grout does not dry out before it is covered with the concrete.

Grout that is allowed to become dry and chalky shall be blast cleaned and replaced at the Contractor's expense. No concrete shall be placed over dry grout.

- b. Direct Bond Method. The deck shall be cleaned to the satisfaction of the Engineer and shall be thoroughly wetted and maintained in a dampened condition for at least 12 hours before placement of the overlay. Any excess water shall be removed by compressed air or by vacuuming prior to beginning overlay placement. Water shall not be applied to the deck surface within one hour before or at any time during placement of the overlay.
- (2) Overlay Placement. For the overlay pour, fogging equipment shall be in operation unless the evaporation rate is less than 0.5 kg/sq m/hr. (0.1 lb./sq ft/hr.) and the Engineer gives permission to turn off the equipment. The evaporation rate shall be determined according to the figure in the Portland Cement Association's publication, "Design and Control of Concrete Mixtures" (refer to the section on plastic shrinkage cracking).

The fogging equipment shall be adjusted to adequately cover the entire width of the pour.

Hand-held fogging equipment shall be allowed only when a vibratory screed is used. The fog mist shall not be used to apply water to a specific location to aid finishing.

Placement of the concrete shall be a continuous operation throughout the pour. The overlay shall be placed as close to its final position as possible and then mechanically consolidated and screeded to final grade. All finishing and texturing shall be according to Article 503.17 except that the use of vibrating screeds will be allowed for pour widths of 3.6 m (12 feet) or less without length restrictions.

Internal vibration shall be performed along edges, adjacent to bulkheads, and where the overlay thickness exceeds 75 mm (3 in.). Internal vibration along the longitudinal edges of a pour shall be performed with a minimum of 2 hand-held vibrators, one on each edge of the pour. Hand finishing shall be performed along the edges of the pour and shall be done from sidewalks, curbs or work bridges.

A construction dam or bulkhead shall be installed in case of a delay of 30 minutes or more in the concrete placement operation. If there is a delay of more than ten minutes during overlay placement, wet burlap shall be used to protect the concrete until operations resume.

Concrete placement operations shall be coordinated to limit the distance between the point of concrete placement and concrete covered with cotton mats for curing. The distance shall not exceed 10.5 m (35 ft). For overlay pour widths greater than 15 m (50 ft), the distance shall not exceed 7.5 m (25 ft).

All construction joints shall be formed. When required by the Engineer the previously placed overlay shall be sawed full-depth to a straight and vertical edge before fresh concrete is placed. The Engineer will determine the extent of the removal. When longitudinal joints are not shown on the plans, the locations shall be subject to approval by the Engineer and shall not be located in the wheel paths.

The Contractor shall stencil the date of construction (month and year) and the appropriate letters MS, or MSFA when fly ash is used in the mix design, into the overlay before it takes its final set. The stencil shall be located in a conspicuous location, as determined by the Engineer, for each stage of construction. This location shall be outside of the grooving where possible and within 1 m (3 ft) of an abutment joint. The characters shall be 75 mm to 100 mm (3 to 4 in.) in height, 5 mm (1/4 in.) in depth and face the centerline of the roadway.

(3) Limitations of Operations:

a. Weather limitations. Concrete shall not be placed unless the deck temperature is above  $10^{\circ}C$  ( $50^{\circ}F$ ) and the air temperature is predicted to be above  $10^{\circ}C$  ( $50^{\circ}F$ ) for at least 12 hours after placement. The concrete shall be maintained at a minimum of  $10^{\circ}C$  ( $50^{\circ}F$ ) during the curing period according to Article 1020.13. The temperature of the concrete mixture as placed shall not be less than  $10^{\circ}C$  ( $50^{\circ}F$ ) nor more than  $32^{\circ}C$  ( $90^{\circ}F$ ). If night placement is required, illumination and placement procedures will be subject to approval of the Engineer. No additional compensation will be allowed if night work is required.

b. Other Limitations. Concrete delivery trucks shall be limited to a maximum load of

4.6 cu m (6 cu yd).

Truck mixers, concrete pumps, or other heavy equipment will not be permitted on any portion of the deck where the top reinforcing mat has been exposed. Conveyors, buggy ramps and pump piping shall be installed in a way that will not displace undercut reinforcement bars. Air compressors may be operated on the deck only if located directly over a pier and supported off undercut reinforcement bars. Compressors will not be allowed to travel over undercut reinforcement bars.

Concrete removal may proceed during final cleaning and concrete placement on adjacent portions of the deck, provided the removal does not interfere in any way with the cleaning or placement operations.

If water or contaminants from the hydro-scarification flow into the area of final cleaning or concrete placement, hydro-scarification shall be suspended until the concrete has been placed and has cured a minimum of 24 hours. No concrete shall be removed within 1.8 m (6 ft) of a newly-placed overlay until the concrete has obtained a minimum compressive strength of 20,700 kPa (3000 psi) or flexural strength of 4,150 kPa (600 psi).

(4) Curing Procedure. The surface shall be continuously wet cured for at least 7 days according to Article 1020.13(a)(5) Wetted Cotton Mat Method.

(5) Opening to Traffic. No traffic or construction equipment will be permitted on the overlay until after the specified cure period and the concrete has obtained a minimum compressive strength of 27,500 kPa (4000 psi) or flexural strength of 4,650 kPa (675 psi) unless permitted by the Engineer.

(6) Overlay Testing. The Engineer reserves the right to conduct pull-off tests on the overlay to determine if any areas are not bonded to the underlying concrete, and at a time determined by the Engineer. The overlay will be tested according to the Illinois Test Procedure 305 "Pull-off Test (Overlay Method)", and the Contractor shall provide the test equipment. Each individual test shall have a minimum strength of 1,034 kPa (150 psi). Unacceptable test results will require removal and replacement of the overlay at the Contractor's expense, and the locations will be determined by the Engineer. When removing portions of an overlay, the saw cut shall be a minimum depth of 25 mm (1 in.).

If the overlay is to remain in place, all core holes due to testing shall be filled with a rapid set mortar or concrete. Only enough water to permit placement and consolidation by rodding shall be used, and the material shall be struck-off flush with the adjacent material.

For a rapid set mortar mixture, one part packaged rapid set cement shall be combined with two parts fine aggregate, by volume; or a packaged rapid set mortar shall be used. For a rapid set concrete mixture, a packaged rapid set mortar shall be combined with coarse aggregate according to the manufacturer's instructions; or a packaged rapid set concrete shall be used. Mixing of a rapid set mortar or concrete shall be according to the manufacturer's instructions.

<u>Method of Measurement</u>. The areas of mechanical and/or hydro scarification on the bridge deck will be measured for payment in square meters (square yards). No additional payment will be made for multiple passes of the equipment required to achieve the specified scarification depth.

The concrete overlay will be measured for payment in square meters (square yards).

When Bridge Deck Hydro-Scarification is specified, the additional concrete placed with the overlay, required to fill all depressions below the specified thickness will be measured for payment in cubic meters (cubic yards). The volume will be determined by subtracting the theoretical volume of the overlay from the ticketed volume of overlay delivered minus the volume estimated by the Engineer left in the last truck at the end of the overlay placement. The theoretical cubic meter (cubic yard) quantity for the overlay will be determined by multiplying the plan surface area of the overlay times the specified thickness of the overlay.

<u>Basis of Payment</u>. Concrete scarification of the bridge deck using mechanical scarification equipment will be paid for at the contract unit price per square meter (square yard) for CONCRETE BRIDGE DECK SCARIFICATION of the depth specified. Concrete scarification of the bridge deck using hydro-scarification equipment will be paid for at the contract unit price per square meter (square yard) for BRIDGE DECK HYDRO-SCARIFICATION of the depth specified.

Microsilica concrete overlay will be paid for at the contract unit price per square meter (square yard) for BRIDGE DECK MICROSILICA CONCRETE OVERLAY, of the thickness specified. When hydro-scarification equipment is used, the additional volume of overlay required to fill all depressions below the specified thickness will be paid for at the Contractor's actual material cost for the microsilica concrete per cubic meter (cubic yard) plus 15 percent.

When mechanical scarification equipment is used, additional partial depth patches poured monolithically with the overlay will be paid for at the contract unit price bid per square meter (square yard) for DECK SLAB REPAIR (PARTIAL).

When the Engineer conducts pull-off tests on the overlay and they are acceptable, Contractor expenses incurred due to testing and for filling core holes will be paid according to Article 109.04. Unacceptable pull-off tests will be at the Contractor's expense.

When specified, the Contractor has the option of choosing the type of overlay. The options will be limited to those specified in the plans and will be paid for at the contract unit price per square meter (square yard) for BRIDGE DECK CONCRETE OVERLAY OPTION, of the thickness specified.

Overlay material placed off the deck in abutment backwalls, and/or other locations will not be measured for payment but will be included in the pay item involved.

### SILICONE BRIDGE JOINT SEALER

Effective: August 1, 1995 Revised: February 7, 2005

<u>Description</u>. This work shall consist of furnishing all labor, equipment, technical assistance and materials necessary to install the silicone joint sealer as shown on the plans and as specified herein.

When specified, a polymer concrete nosing compatible with the silicone sealant as required by the sealant manufacturer shall be installed. The minimum dimensions for a polymer concrete nosing cross section are 40 mm (1 1/2 in.) deep by 90 mm (3 1/2 in.) wide. The polymer concrete shall be furnished and installed according to the Special Provision for "Polymer Concrete".

### Materials:

(a) <u>Silicone Joint Sealer</u>. The silicone joint sealer shall be rapid cure, self-leveling, cold applied, two component silicone sealant. The sealant, upon curing, shall demonstrate resilience, flexibility and resistance to moisture and puncture. The sealant shall also demonstrate excellent adhesion to portland cement concrete, polymer concrete and steel over a range of temperatures from -34 to 54°C (-30 to 130°F) while maintaining a watertight seal. The sealant shall not contain any solvents or diluents that cause shrinkage or expansion during curing. Acid cure sealants are not acceptable. The date of manufacture shall be provided with each lot. Materials twelve months old or older from the date of manufacture will not be accepted. The manufacturer shall certify that the sealant meets or exceeds the following test requirements before installation begins. The Department reserves the right to test representative samples from material proposed for use.

**Physical Properties:** 

<u>Each component as supplied</u> : Specific Gravity (ASTM D1475) Extrusion Rate (MIL-5-8802) Flow		1.2-1.4 200 - 600 grams per minute Self-leveling
Durometer Hardness, Shore (ASTM I "00" (0° and 25°C <u>+</u> 1°C (32°F and 77	,	40-80
Ozone and U.V. (ASTM C 793) Resistance		No chalking, cracking or bond loss after 5,000 hours.
<u>After Mixing</u> : Tack Free Time (ASTM C679) Joint Cure Rate (% of total cure)	60 minutes max. 50% within 4 - 6 ho 75% within 24 hou 100% within 48 - 1	rs
Upon Complete Cure: (ASTM D-356 Joint Elongation (adhesion to	·	
concrete/steel/polymer concrete) Joint Modulus	600% min 21-103 kPa (3-15 j	osi) @ 100% elongation
<sup>1</sup> Modified; Sample cured 2 days at 25	5±1°C (77±2°F) 50±5	% relative humidity

(b) <u>Backer Rod</u>. The backer rod shall conform to ASTM D5249, Type 3.

### CONSTRUCTION REQUIREMENTS

<u>General</u>. Technical assistance provided by the manufacturer during surface preparation and installation shall be furnished at no additional cost to the Department. The Contractor shall furnish the Engineer with the manufacturer's written product information, installation procedures, and instructional video at least two weeks prior to installation. The Contractor, the manufacturer's representative, and the Engineer shall meet to review and clarify installation procedures, and requirements prior to starting the work. A technical representative must be present for the start of surface preparations and installation for at least one day. The Contractor shall contact the manufacturer at least two weeks prior to installation.

When placing the silicone against concrete, the concrete surface shall be dry. For newly placed concrete, the concrete shall be fully cured and allowed to dry out a minimum of 7 additional days prior to placement of the silicone. Cold, wet, inclement weather will require an extended drying time.

#### (a) <u>Surface Preparation</u>:

(1) Sandblasting. Both faces of the joint shall be sandblasted. A separate pass for each face for the full length of the joint and to the design depth of the center of the backer rod will be required. The nozzle shall be held at an angle of 30-90 degrees to the joint face, at a distance of 25-50 mm (1 - 2 in.).

For portland cement concrete and polymer concrete surfaces, sandblasting will be considered acceptable when both joint faces have a roughened surface with clean, exposed aggregate. The surface shall be free of foreign matter or plastic residue.

For steel surfaces, sandblasting will be considered acceptable when the steel surfaces have been cleaned to an SSPC-SP10 degree of cleanliness.

After sandblasting is completed, the joint shall be cleaned of debris using compressed air with a minimum pressure of 620 kPa (90 psi). The air compressor shall be equipped with traps to prevent the inclusion of water and/or oil in the air line.

(2) Priming. This operation will immediately follow sandblasting and cleaning and will only be permitted to proceed with the air and substrate temperatures are at least 5°C (41°F) and rising. Sandblasting, priming and sealing must be performed on the same day. The entire sandblasted surface shall be primed using a brush applied primer. The primer shall be allowed to dry a minimum of one hour or more until it is thoroughly dry, whichever is longer, before proceeding. For steel surfaces, the minimum drying time shall be extended to 90 minutes when the substrate temperature is below  $15^{\circ}C$  ( $60^{\circ}F$ ).

For portland cement concrete and polymer concrete, the primer shall be in according to the manufacturer's recommendations. For steel surfaces, the primer shall be a rust inhibiting primer recommended by the sealant manufacturer.

The primer shall be supplied in original containers and shall have a "use-by" date clearly marked on them. Only primer, freshly poured from the original container into clean pails will be permitted. The primer must be used immediately. All primer left in the pail after priming shall be disposed of and shall not be reused.

#### (b) Joint Installation:

- (1) Backer Rod Placement. The backer rod shall be installed to a uniform depth as specified on the plans and as recommended by the manufacturer. All splices in the backer rod shall be taped to prevent material loss during sealing. The backer rod shall be installed to within 3 mm (1/8 in.) tolerance prior to sealing.
- (2) Sealant Placement. The sealant shall be 13 mm (1/2 in.) thick within ± 3 mm (1/8 in.) tolerance as measured in the center of the joint at the thinnest point. The sealant thickness shall be measured during installation every ±600 mm (±2 ft). Adjustments to correct sealant thickness to within tolerance shall be made immediately before the sealant begins to set up. Sealant placement will only be permitted when the air and substrate temperatures are above 5°C (41°F) and 2.8°C (5°F) above the dew point. The joint must be kept clean and dry during sealing. If the joint becomes wet and/or dirty during sealing, the operation will be halted until the joint has been restored to a clean and dry state.

Sealing shall be performed using a pneumatic gun approved by the sealant manufacturer. Prior to sealing, the gun shall be inspected to insure that it is in proper working order and that it is being operated at the recommended air pressure.

The gun must demonstrate proper mixing action before sealant will be allowed into the joint. Unmixed sealant will not be permitted in the joint. All unmixed sealant found in the joint will be removed and replaced at the Contractors expense.

After the Engineer has determined that the pneumatic gun is functioning properly, the joint shall be sealed to the thickness and depth as shown on the plans. The sealant must be allowed to achieve initial set before opening the joint to traffic.

End of seal treatment at vertical faces of curbs, sidewalks or parapets shall be as recommended by the manufacturer and as shown on the plans.

Sealant placed incorrectly shall be removed and replaced by the Contractor at no additional cost to the Department.

(3) Field Testing. A minimum of one joint per bridge per joint configuration will be tested by the Engineer by performing a Pull Test. The sealant shall be allowed to cure for a minimum of 24 hours before testing. The locations for the tests will be determined by the Engineer. The tests will be performed per the manufacture's written instructions. As part of the test, the depth and thickness of the sealant will be verified. All joint system installations failing to meet the specifications shall be removed and replaced, by the Contractor, to the satisfaction of the Engineer at no additional cost to the Department. In addition, the "Pull Test" is a destructive test, the Contractor shall repair the joint after completion of the test per the manufacturer's written instructions at no additional cost to the Department.

<u>Method of Measurement</u>. The installed joint sealer will be measured in meters (feet) along the centerline of the joint.

<u>Basis of Payment</u>. The silicone joint sealer measured as specified will be paid for at the contract unit price per meter (foot) for SILICONE JOINT SEALER, of the size specified. The size is defined as the joint opening at  $10^{\circ}$ C ( $50^{\circ}$ F), rounded to the nearest 13 mm (½ inch). When a polymer concrete nosing is specified it shall not be included in this item but will be paid for according to the Special Provision for "Polymer Concrete".

#### PLUG EXISTING DECK DRAINS

Effective: November 6, 1996 Revised: April 7, 1998


#### Description.

This work consists of the satisfactory plugging of the existing bridge deck drains at locations and as detailed in the plans.

<u>Construction Requirements</u>. The threaded rod, nuts and washers shall be galvanized according to AASHTO M 232. The material used to plug the drains shall be Class BD concrete and shall be placed according to Section 503 of the Standard Specifications.

#### Basis of Payment.

This work will be paid for at the contract unit price each for PLUG EXISTING DECK DRAINS, which price shall include all material and labor to satisfactorily complete the work

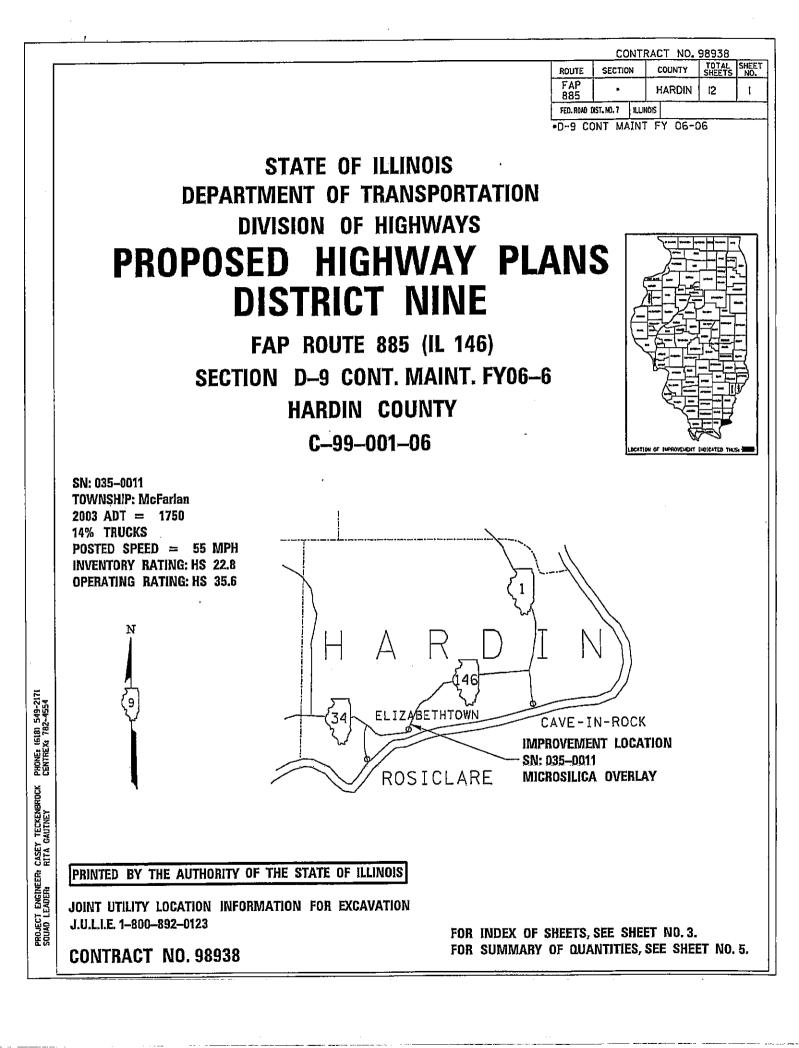

			CO	NTRACT NO	. 98938	}
· · · · · · · · · · · · · · · · · · ·		ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET ND.
		FAP 885	•	HARDIN	12	2
		FED. ROAD D	HST. NO. 7 ILLI	NOIS		L
		•D-9 CC	NT MAINT	FY 06-06	5	
	SIGNATURE SHEET					
				—		
	STATE OF ILLINOIS					
	DEPARTMENT OF TRANSPORTATION	J				
	DIVISION OF HIGHWAYS	•				
	DIVISION OF HIGHWAYS					
·						
	SUBMITTED Dec. 28 20,05					
	Mary C. Zamie					
	DEPUTY DIRECTOR OF HIGHWAYS,					
	REGION ENGINEER					
		$\overline{)}$	$\overline{\Lambda}$			
	Prepared By:	a th	4			
	DISTRICT OPERATIONS ENGINEE	R				
	Examined By: Land	- ~				1
	ASSISTANT REGIONAL ENGINEER					
	Examined By: James Maris me	in				
	STRICT LAND ACQUISITION P	NEINEE	R			
	Examined By: <u>Carrie Nelson</u>	7				
	DISTRICT PROGRAM DEVELOPMEN	IT ENGI	NEER	1		
	Energy A. R.D. D.					
	Examined By: 1, 100 Thank rewun DISTRICT STUDIES AND PLANS	ENGINF	ER			
	Examined By: June Luni					
	DISTRICT CONSTRUCTION ENGIN	IEER			-	
	Examined By: <u>Brunce teebles</u>					
	DISTRICT MATERIALS ENGINEER	? •				
		1-				
	Examined By:	TION F	NGINEER			

\_\_\_\_

----

CONTRACT NO. 98938								
ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.				
FAP 885	•	HARDIN	12	3				
FED. ROAD DIST. NO. 7 ILLINOIS								
+D-9 CONT MAINT FY 06-06								

INDEX OF SHEETS

## <u>SHEET</u>

NO.	DESCRIPTION
1	TITLE SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, STANDARDS
4	GENERAL NOTES
5	SUMMARY OF QUANTITIES
6	GENERAL PLAN
7	SECTIONS THRU DECK
8	JOINT ARMOR MODIFICATION
9	DECK REPAIR
10	DECK DRAINS
11	PAVEMENT MARKING, BITUMINOUS MIX
12	STAGES OF CONSTRUCTION

<u>STANDARDS</u>

701301-02	
701316-03	
702001-05	
780001-01	

... --

CONTRACT_NO. 98938								
	ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
	FAP 885	•	HARDIN	12	4			
	FED. ROAD D	151. NO. 7   ILL	NOIS					
	•D-9 CO	NT MAINT	FY 06-06	5				

# GENERAL NOTES

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING STRUCTURE HAVE BEEN TAKEN FROM EXISTING PLANS AND ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY SUCH DIMENSIONS AND DETAILS IN THE FIELD AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO THE CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN THE SCOPE OF THE WORK: HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT PRICE BID FOR THE WORK.

THE CONTRACTOR SHALL SUPPLY 2 PORTABLE CHANGEABLE MESSAGE SIGNS AT LEAST TWO WEEKS PRIOR TO ANY LANE CLOSURE.

THE ADVANCE DETECTOR LOOPS ARE TYPICALLY LOCATED 300 FEET IN ADVANCE OF THE STOP BAR. THE BUREAU OF OPERATIONS MUST APPROVE THE LOOP LOCATIONS PRIOR TO INSTALLATION.

WHILE SIGNAL HEADS ARE MOUNTED IN PLACE, BUT NOT YET IN OPERATION, THEY SHALL BE SECURELY COVERED IN WHITE PLASTIC.

THE CENTERLINE PAVEMENT MARKING SHALL BE REMOVED FROM THE STOP BAR TO THE TYPE III BARRICADE FOR STAGE I AND STAGE II PRIOR TO BARRICADE PLACEMENT.

ALL EXISTING BRIDGE DECK PATCHES WHICH ARE DE-BONDED SHALL BE REMOVED DURING HYDRO-SCARIFICATION. LOCATIONS OF DE-BONDED PATCHES SHALL BE DETERMINED BY THE ENGINEER.

THE SEASONAL REQUIREMENTS OF ARTICLE 420.21 WILL NOT APPLY TO APPLICATION OF PROTECTIVE COAT.

PRIOR TO PLACEMENT OF THE FINAL PAVEMENT MARKINGS THE RESIDENT ENGINEER SHOULD CONTACT THE BUREAU OF OPERATIONS AND ARRANGE FOR INSPECTION AND APPROVAL OF THE PAVEMENT MARKING LAYOUT.

ALL STRUCTURAL STEEL SHALL BE AASHTO M 270 GRADE 36. STRUCTURAL STEEL SHALL BE SHOP PAINTED WITH THE INORGANIC ZINC RICH PRIMER PER AASHTO M300, TYPE I. COST INCLUDED IN FURNISHING AND ERECTING STRUCTURAL STEEL.

AREAS AND LOCATIONS OF DECK REPAIRS ARE ONLY ESTIMATES. ACTUAL QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD. THE ENGINEER SHALL MARK THE ACTUAL REPAIRS ON THE AS-BUILT PLANS.

FACTORS USED FOR ESTIMATING PLAN QUANTITIES ARE AS FOLLOWS AND SHALL NOT BE USED FOR THE BASIS OF FINAL QUANTITIES:

ALL BITUMINOUS CONCRETE ALL AGGREGATE BITUMINOUS MATERIALS: ON PAVEMENT INTERMEDIATE LIFTS (FOG COAT) ON AGGREGATE SURFACE AGGREGATE (PRIME COAT) RIPRAP

2.016 TONS/CU.YD. 2.05 TONS/CU.YD. 0.09 GAL./SQ. YD.

0.04 GAL./SQ.YD. 0.32 GAL./SQ. YD. 0.0015 TONS/SQ.YD. 1.50 TONS/CU.YD.

# <u>SUMMARY OF QUANTITIES</u>

 
 CONTRACT NO. 98938


 ROUTE
 SECTION
 COUNTY
 TOTAL SHEETS
 SHEET NO.


 FAP 885
 HARDIN
 12
 5


 FED. ROAD DIST. NO. 7
 ILLINOIS
 ILLINOIS
 ILLINOIS


+D-9 CONT MAINT FY 06-06

	CONSTRUCTION TYPE CODE: SFTY-2A	100% S	TATE
CODE NO.	ITEM DESCRIPTION	UNIT	QUANTITY
40600300	AGGREGATE PRIME COAT	TON	1
40600100	BITUMINOUS MATERIALS PRIME COAT	GALLON	20.0
40600990	TEMPORARY RAMP	SQ. YD.	16
42001300	PROTECTIVE COAT	SO. YD.	413
50300260	BRIDGE DECK GROOVING	SO. YD.	366
50500405	FURNISHING AND ERECTING STRUCTURAL STEEL	POUND	430
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL. MO.	3
67100100	MOBILIZATION	L. SUM	1
70100100	TRAFFIC CONTROL AND PROTECTION, STANDARD 701316	EACH	1
70106500	TEMPORARY BRIDGE TRAFFIC SIGNALS	EACH	1
70300100	SHORT -TERM PAVEMENT MARKING	FOOT	15
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	444
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ. FT.	107
78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	444
X0323076	SILICONE JOINT SEALER, 1 3/4"	FOOT	29
X0323077 X0321468	SILICONE JOINT SEALER, 2 3/4" PLUG EXISTING DECK DRAINS	FOOT EACH	29 12
	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N90	TON	12
X4066418	DITUMINUUS CONCRETE SOM ACE COMSE, SUI EN AVE, MAK C, NOS		
X7015000	CHANGEABLE MESSAGE SIGN	CAL. MO.	2
XZ193500	BRIDGE DECK MICROSILICA CONCRETE OVERLAY 2 1/4"	SQ. YD.	396
Z0006204	BRIDGE DECK HYDRO-SCARIFICATION 1/2"	SO. YD.	396
Z0016001	DECK SLAB REPAIR (FULL DEPTH, TYPE I)	SO. YD.	0.5
Z0016002	DECK SLAB REPAIR (FULL DEPTH, TYPE II)	SQ. YD.	9.0
Z0016002	DECK SLAB REPAIR (FULL DEPTH. TYPE II)	SQ. YD.	9.

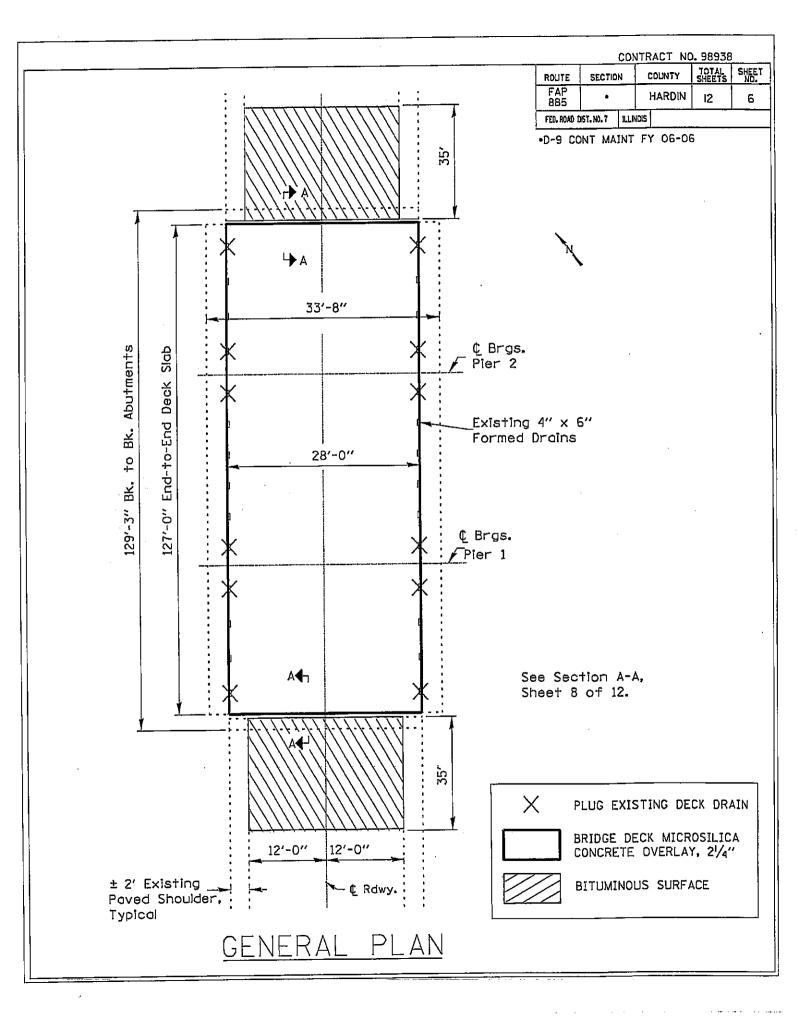

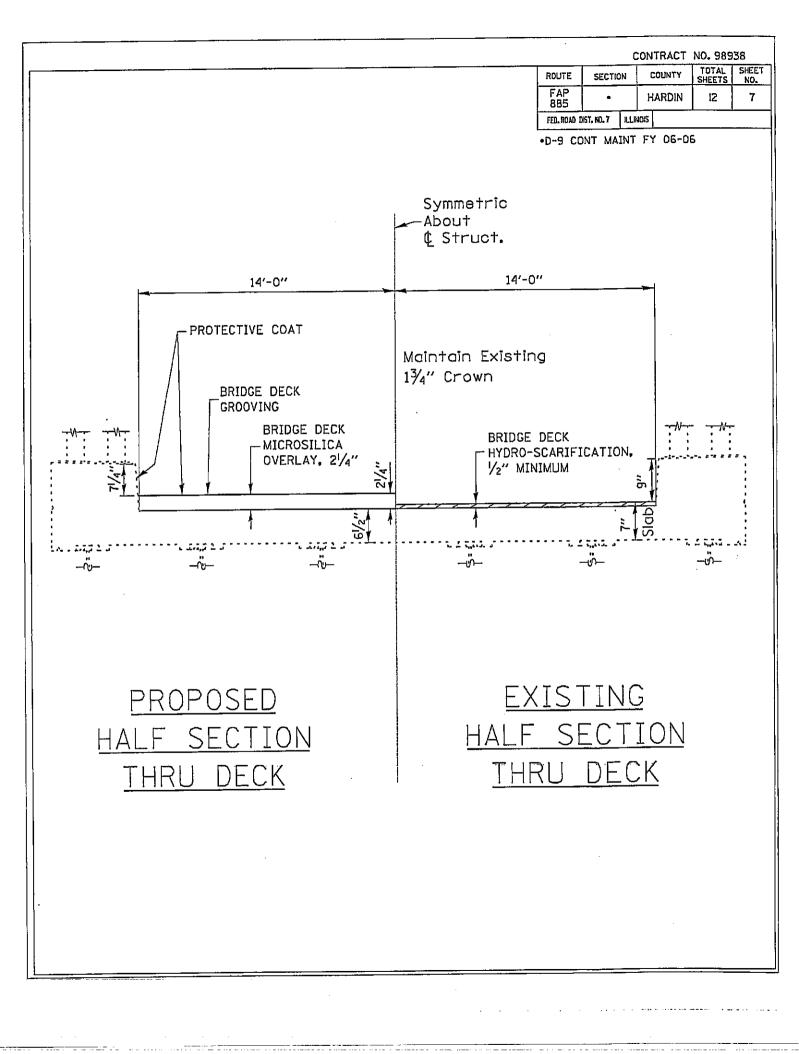

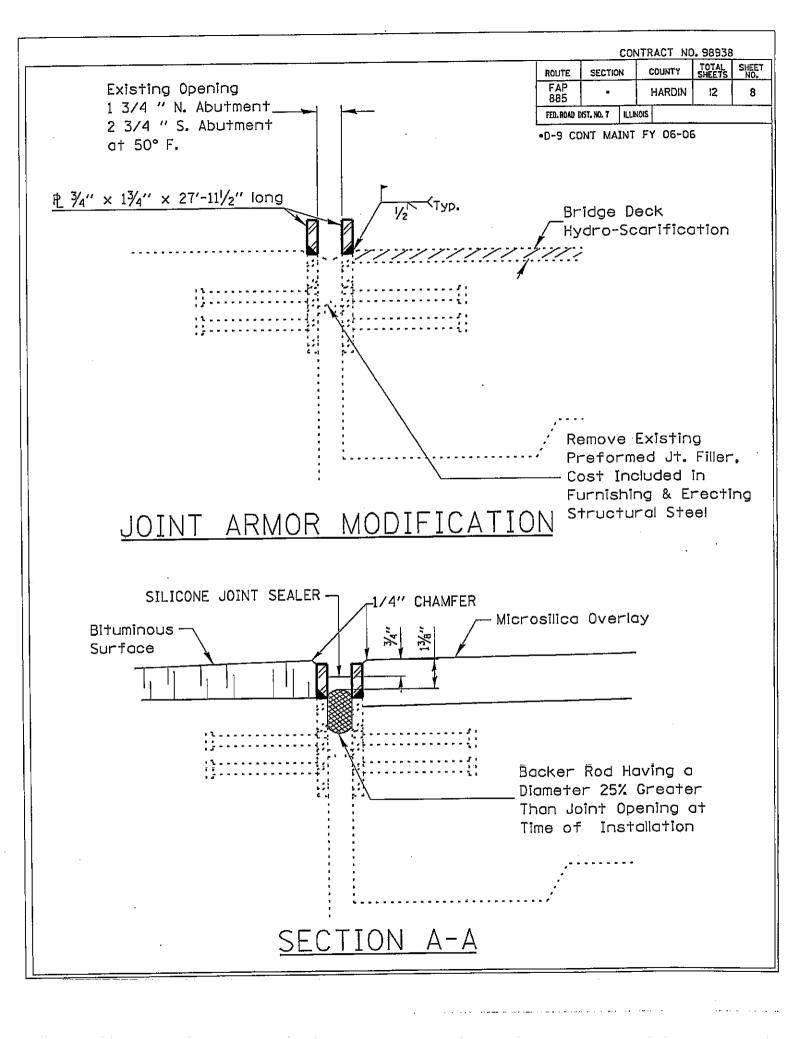

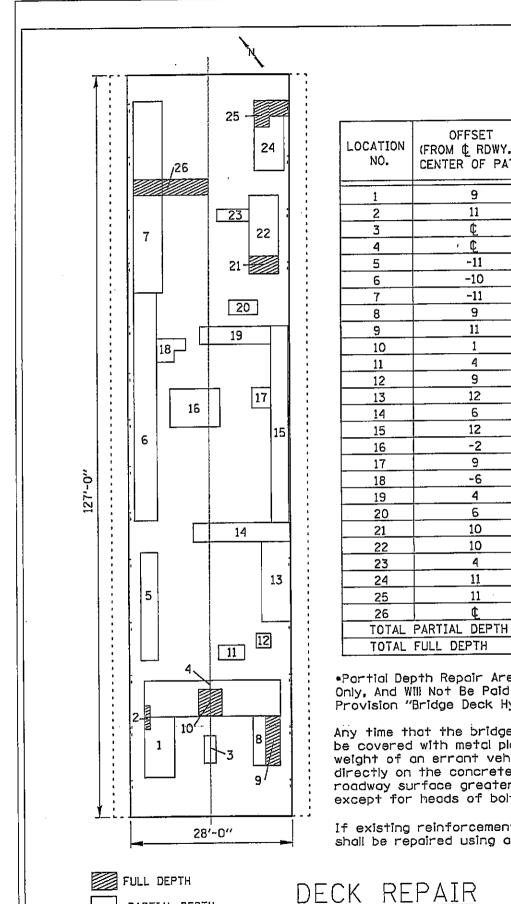

PARTIAL DEPTH

FAP 885 HARDIN 12 FED. ROAD DIST. NO. 7 ILLINOIS -D-9 CONT MAINT FY 06-06 PARTIAL FULL (FROM ¢ RDWY. TO DEPTH DEPTH CENTER OF PATCH) (SO. YD.) (SQ. YD.) 6.0 .5 1.1 13.7 0.6 17.5 16.7 2.0 2,0 2.0 1.2 0.7 7.8 6.1 11.2 6.3 1.2 1.7 4.1 1.5 1.0 6.0 1.5 4.2 1.3 1.7 111.0 9.5

ROUTE

SECTION

CONTRACT NO. 98938

COUNTY


TOTAL SHEETS SHEET

9

•Partial Depth Repair Areas Are Shown For Information Only, And Will Not Be Paid For Separately. See Special Provision "Bridge Deck Hydro-Scarification".

Any time that the bridge deck has open holes, they shall be covered with metal plates capable of carrying the full weight of an errant vehicle. Plates shall be placed directly on the concrete deck. Projections above the roadway surface greater than 1" are not permitted except for heads of bolts.

If existing reinforcement is damaged, the reinforcement shall be repaired using approved splicing method.

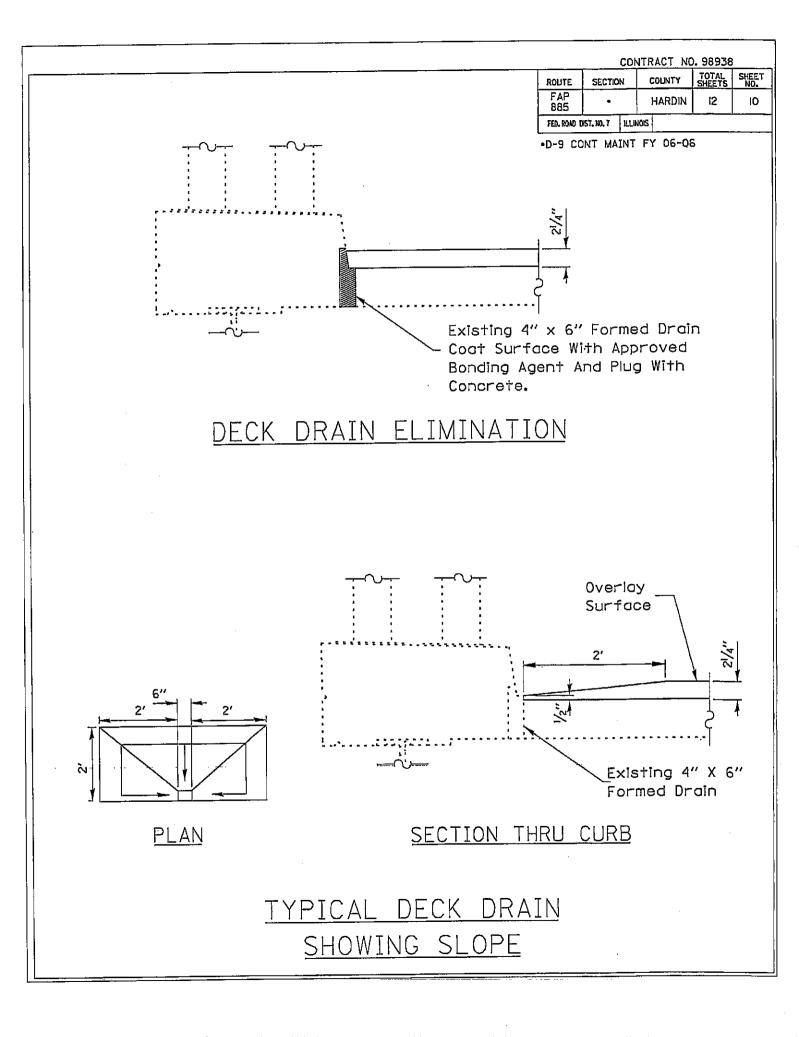


					). 98938	) 
•	ROUTE	SECTIO	אכ	COUNTY	TOTAL SHEETS	SHEE NO.
	FAP 885	•		HARDIN	12	) ม
	FED. ROAD	XST. NO. 7	ILLINO	s		
	•D-9 C	ONT MA	INT	FY 06-0	6	
				,		
PAINT PAVE	FMFNT					
MARKING LIN	<u> </u>					
I						
	IFT.					
YELLOW 50	FT.					
BITUMINOUS M	IX DESIC	3N			,	

LOCATION:	BITUMINOUS SURFACE COURSE
MIXTURE USE(S):	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N90
AC/PG:	PG64-22
RAP % (MAX):	10
DESIGN AIR VOIDS:	4.0%, 90 GYRATION SUPERPAVE DESIGN
MIXTURE COMPOSITION: (GRADATION MIXTURE)	IL - 9.5 mm OR IL 12.5 mm
FRICTION AGGREGATE:	C SURFACE

. .

.

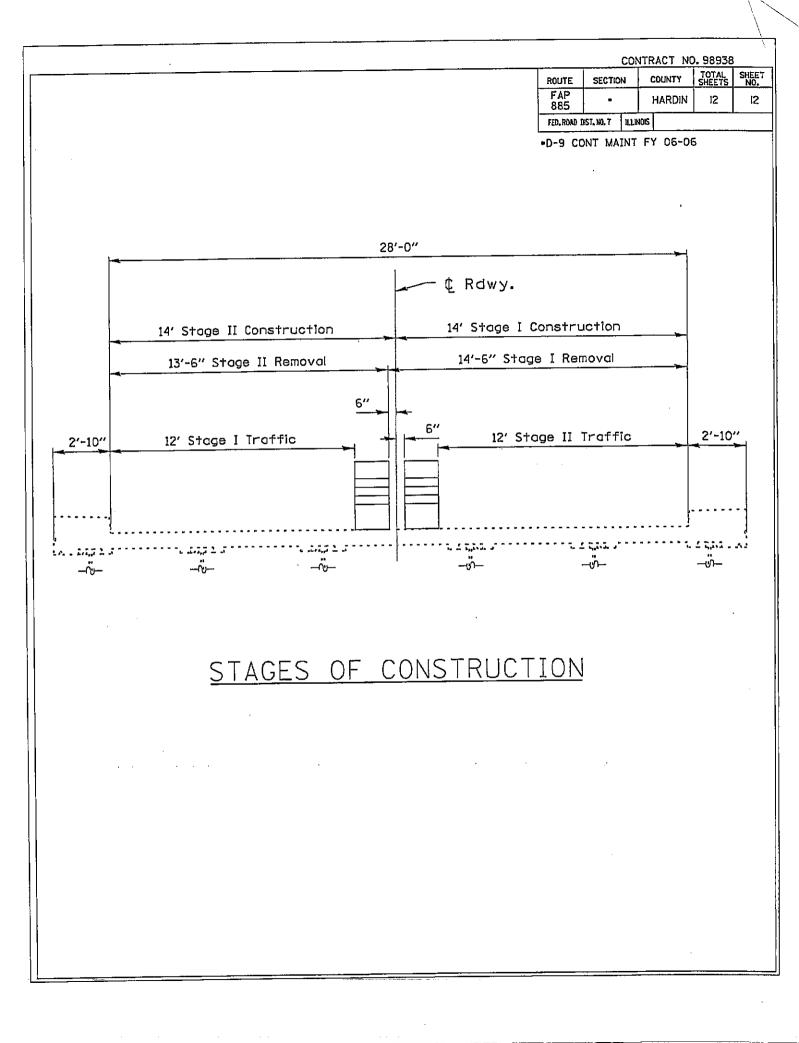

## ILLINOIS DEPARTMENT OF LABOR

## PREVAILING WAGES FOR HARDIN COUNTY EFFECTIVE FEBRUARY 2006

The Prevailing rates of wages are included in the Contract proposals which are subject to Check Sheet #5 of the Supplemental Specifications and Recurring Special Provisions. The rates have been ascertained and certified by the Illinois Department of Labor for the locality in which the work is to be performed and for each craft or type of work or mechanic needed to execute the work of the Contract. As required by Prevailing Wage Act (820 ILCS 130/0.01, et seq.) and Check Sheet #5 of the Contract, not less than the rates of wages ascertained by the Illinois Department of Labor and as revised during the performance of a Contract shall be paid to all laborers, workers and mechanics performing work under the Contract. Post the scale of wages in a prominent and easily accessible place at the site of work.

If the Illinois Department of Labor revises the prevailing rates of wages to be paid as listed in the specification of rates, the contractor shall post the revised rates of wages and shall pay not less than the revised rates of wages. Current wage rate information shall be obtained by visiting the Illinois Department of Labor web site at <a href="http://www.state.il.us/agency/idol/">http://www.state.il.us/agency/idol/</a> or by calling 312-793-2814. It is the responsibility of the contractor to review the rates applicable to the work of the contract at regular intervals in order to insure the timely payment of current rates. Provision of this information to the contractor by means of the Illinois Department of Labor web site satisfies the notification of revisions by the Department to the contractor pursuant to the Act, and the contractor agrees that no additional notice is required. The contractor shall notify each of its subcontractors of the revised rates of wages.

# Hardin County Prevailing Wage for February 2006

Trade Name	RG TYP (		FRMAN *M-F>8			Pensn	Vac	Trng =====
ASBESTOS ABT-GEN	ALL		20.400 1.5	1.5 2.0				
ASBESTOS ABT-MEC	BLD	20.800	0.000 2.0	2.0 2.0	4.750	3.000	0.000	0.000
BOILERMAKER	BLD	27.750	30.250 1.5	1.5 2.0	6.620	10.48	0.000	0.210
BRICK MASON	BLD	24.990	26.490 1.5	1.5 2.0	5.750	4.900	0.000	0.425
CARPENTER	BLD	27.030	28.530 1.5	1.5 2.0	4.750	3.500	0.000	0.350
CARPENTER	HWY	27.030	28.530 1.5	1.5 2.0	4.750	3.500	0.000	0.350
CEMENT MASON	BLD		24.500 1.5	1.5 2.0				
CEMENT MASON	HWY		24.350 1.5	1.5 2.0				
CERAMIC TILE FNSHER	BLD	24.990	0.000 1.5	1.5 2.0				
ELECTRICIAN	ALL		33.720 1.5	1.5 2.0				
ELECTRONIC SYS TECH	BLD		25.920 1.5	1.5 2.0				
FLOOR LAYER	BLD		26.780 1.5	1.5 2.0				
GLAZIER	BLD	22.490	0.000 1.5	1.5 2.0				
HT/FROST INSULATOR	BLD		26.050 1.5 22.900 1.5	1.5 2.0				0.190
IRON WORKER LABORER	ALL BLD		20.400 1.5	1.5 2.0				
LABORER	HWY		20.400 1.5	1.5 2.0				
LABORER	0&C		15.410 1.5		5.000			
MACHINIST	BLD		37.630 2.0		3.880			
MARBLE FINISHERS	BLD	24.990	0.000 1.5	1.5 2.0				
MARBLE MASON	BLD		26.490 1.5	1.5 2.0				
MILLWRIGHT	BLD	27.030	28.530 1.5	1.5 2.0				
MILLWRIGHT	HWY	27.030	28.530 1.5	1.5 2.0	4.750	3.500	0.000	0.350
OE RIVER 1	RIV 1	25.500	0.000 1.5	1.5 2.0	4.900	5.650	0.000	0.940
OE RIVER 2	RIV 2	22.050	0.000 1.5	1.5 2.0	4.900	5.650	0.000	0.940
OPERATING ENGINEER			26.400 1.5	1.5 2.0				
OPERATING ENGINEER			26.400 1.5	1.5 2.0				
OPERATING ENGINEER			26.400 1.5	1.5 2.0				
OPERATING ENGINEER			26.400 1.5	1.5 2.0				
OPERATING ENGINEER			20.050 1.5	1.5 2.0				
OPERATING ENGINEER			20.050 1.5 20.050 1.5	1.5 2.0	4.900			0.940
OPERATING ENGINEER OPERATING ENGINEER			20.050 1.5		4.900			0.940
PAINTER	BLD		23.090 1.5	1.5 2.0				
PAINTER	HWY		27.390 1.5	1.5 2.0				
PAINTER OVER 30FT	BLD		24.090 1.5	1.5 2.0				
PAINTER PWR EQMT	BLD	23.090	24.090 1.5	1.5 2.0	5.080	4.200	0.000	0.250
PAINTER PWR EQMT	HWY	26.890	27.890 1.5	1.5 2.0	4.480	4.000	0.000	0.250
PILEDRIVER	BLD	27.030	28.530 1.5	1.5 2.0				
PILEDRIVER	HWY	27.030	28.530 1.5	1.5 2.0	4.750	3.500	0.000	0.350
PIPEFITTER	BLD	30.800	33.880 1.5	2.0 2.0				
PLASTERER	BLD		24.500 1.5	1.5 2.0				
PLUMBER	BLD		33.880 1.5	2.0 2.0				
ROOFER	BLD		25.690 1.5	1.5 2.0				
SHEETMETAL WORKER	ALL		28.460 1.5	1.5 2.0				
SPRINKLER FITTER	BLD		33.240 1.5	1.5 2.0				
STONE MASON	BLD		26.490 1.5	1.5 2.0				
TERRAZZO FINISHER	BLD ATT 1	24.990		1.5 2.0 1.5 2.0				
TRUCK DRIVER TRUCK DRIVER		24.040	0.000 1.5 0.000 1.5	1.5 2.0				
TRUCK DRIVER		24.640		1.5 2.0				
TRUCK DRIVER		24.890	0.000 1.5	1.5 2.0				
TRUCK DRIVER		25.640	0.000 1.5	1.5 2.0				
TRUCK DRIVER		19.500	0.000 1.5	1.5 2.0				
TRUCK DRIVER		15.900	0.000 1.5	1.5 2.0				
TRUCK DRIVER		16.400		1.5 2.0				
TUCKPOINTER	BLD	24.990	26.490 1.5	1.5 2.0	5.750	4.900	0.000	0.425

M-F>8 (Overtime is required for any hour greater than 8 worked each day, Monday through Friday. OSA (Overtime is required for every hour worked on Saturday) OSH (Overtime is required for every hour worked on Sunday and Holidays) H/W (Health & Welfare Insurance) Pensn (Pension) Vac (Vacation) Trng (Training)

# **Explanations**

HARDIN COUNTY

The following list is considered as those days for which holiday rates of wages for work performed apply: New Years Day, Memorial/Decoration Day, Fourth of July, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration such as the day after Thanksgiving for Veterans Day. If in doubt, please check with IDOL.

Oil and chip resealing (O&C) means the application of road oils and liquid asphalt to coat an existing road surface, followed by application of aggregate chips or gravel to coated surface, and subsequent rolling of material to seal the surface.

EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

LABORER - OIL AND CHIP RESEALING ONLY

Hook and unhook chip box from aggregate truck; distribute material within chip box; perform flagging work related to oil and chip resealing; hand spray oil fluids; handle traffic control, including setting-up and maintaining barricades, drums, cones, delineators, signs and other such items, as well as laying-out and applying or removing temporary roadway markings used to control traffic in job site related to oil and chip resealing; and perform clean- up related to oil and chip resealing.

#### CERAMIC TILE FINISHER, MARBLE FINISHER, TERRAZZO FINISHER

Assisting, helping or supporting the tile, marble and terrazzo mechanic by performing their historic and traditional work assignments required to complete the proper installation of the work covered by said crafts. The term "Ceramic" is used for naming the classification only, and is in no a limitation of the product handled. Ceramic takes into consideration most hard tiles.

#### ELECTRONIC SYSTEMS TECHNICIAN

Installation, service and maintenance of low-voltage systems which utilizes the transmission and/or transference of voice, sound, vision, or digital for commercial, education, security and entertainment purposes for the following: TV monitoring and surveillance, background/foreground music, intercom and telephone interconnect, field programming, inventory control systems, microwave transmission, multi-media, multiplex, radio page, school, intercom and sound burglar alarms and low voltage master clock systems.

Excluded from this classification are energy management systems, life safety systems, supervisory controls and data acquisition systems not intrinsic with the above listed systems, fire alarm systems, nurse call systems and raceways exceeding fifteen feet in length.

TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION Class 1. Drivers on 2 axle trucks hauling less than 9 ton. Air compressor and welding machines and brooms, including those pulled by separate units, truck driver helpers, warehouse employees, mechanic helpers, greasers and tiremen, pickup trucks when hauling materials, tools, or workers to and from and on-the-job site, and fork lifts up to 6,000 lb. capacity.

Class 2. Two or three axle trucks hauling more than 9 ton but hauling less than 16 ton. A-frame winch trucks, hydrolift trucks, vactor trucks or similar equipment when used for transportation purposes. Fork lifts over 6,000 lb. capacity, winch trucks, four axle combination units, and ticket writers.

Class 3. Two, three or four axle trucks hauling 16 ton or more. Drivers on water pulls, articulated dump trucks, mechanics and working forepersons, and dispatchers. Five axle or more combination units.

Class 4. Low Boy and Oil Distributors.

Class 5. Drivers who require special protective clothing while employed on hazardous waste work.

TRUCK DRIVER - O & C (Oil and Chip Resealing ONLY)

It involves driving of contractor or subcontractor owned, leased, or hired pickup, dump, service, or oil distributor trucks. Includes transporting materials and equipment (including, but not limited to oils, aggregate supplies, parts, machinery and tools) to or from the job site; distributing oil or liquid asphalt and aggregate; stock piling material; and maintaining trucks at job site related to oil and chip resealing.

Class 1. Distributors, liquid asphalt hauling and hauling of asphalt rubber-tired rollers.

Class 2. Stockpiling.

Class 3. Tandem hauling to job site.

OPERATING ENGINEERS - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION

Class 1. APSCO or Equal Spreading Machine, Backhoe, Backfiller, Boom or Winch Cat, Bituminous Mixplane Machine, Blacksmith, Bituminous Surfacing Machine, Bull-Dozer, Crane, Shovel, Dragline, Truck Crane, Pile Driver, Concrete Breaker, Concrete or PumpCrete Pumps, Dinky or Standard Locomotives, Well or Caisson Drills, Elevating Grader, Fork Lifts, Flexplane, Gradeall, Hi-Lift Hoists, Guy-Derricks, Hysters, Mechanic Motor Patrol, Mixers-21 cu. ft. or over, Push Cats, Pulls and Scrapers, Two Well Point Pumps, Pulverizer or Tiller, PugMill, Rubber-Tired Farm Type Tractor with Bulldozer/Blade/Auger or hi-lift over 1/2 yd., Jersey Spreader, Tract-Air used with Drill or Hi-Lift, Trenching or Ditching Machines, Wood Chipper w/Tractor, Self-Propelled Roller w/Blade, Equipment Greaser, Self-Propelled Bump Grinder on Concrete pavement, Boat Operator, Skid-Loaders, Tuggers, Lazer Screed, and Self-Propelled Chip Spreader (when others run conveyors).

Class 2. Any type tractor pulling any type roller or disc, Two Air Compressors (220 cu. ft. capacity or over), Two AirTract Drills, Air-Track Drill w/Compressor, Automatic Bins or Scales w/Compressor or Generator, Pipeline Boring Machine, Bulk Cement Plant w/Separate Compressor, Power Operated Bull Float, Hydra-Lift w/Single Motor, Straw Mulcher Blower w/Spout, Self-Propelled Roller/Compactor, Back-End man on Bituminous Surfacing Machine, oiler on milling machine.

Class 3. Air Compressor w/Valve driving piling, Boom or Winch Type Truck, Two Conveyors, Self-Propelled Concrete Saw, Form Grader, Truck Crane Oiler, Self-Propelled Vibrator, Rubber Tired Farm Type Tractor w/Blade/Bulldozer/Auger/hi-lift - 1/2 yd. or less, Elevator Operator, Man Lift (scissor lift) when lifting materials.

Class 4. Air-Track Drill (one), Belt Drag Machine, Power Broom, Mechanical Plasterer Applicator, Trac-Air, Air Compressor (220 cu. ft. or over) One, Air Compressor (under 220 cu. ft) four, Automatic Bin, Bulk Cement Plant w/Built-in Compressor running off same motor or electric motor, Fireman or Switchman, Self-Propelled Form Tamper, Light Plants (4), Welding Machines (4), Pumps (4), or Combination of four (4) Pumps, Light Plants, Welding Machines, Air-Compressors (under 220 cu. ft.), Mudjacks or Wood Chipper, Mixers - less than 21 cu. ft. Mortar Mixer w/Skip or Pump, Pipeline Tract Jack. One Operating Engineer may operate and maintain any combination of the following pieces of equipment, not to exceed four (4) which shall be within a reasonable distance, such combination may include any equipment in this classification: (Compressors, Light Plants, Generators, Welding Machines, Pumps or Conveyors), One Well- Point Pump, Two Motor Driven Heaters, One Air Compressor (under 220 cu. ft.), One Engine-Driven Conveyor, One Motor Driven Heater, One Light Plant, One Pump, One Welding Machine, One Ulmac or Equal Spreader, Oilers, and one Generator 10 kw or greater.

OPERATING ENGINEER - O & C (Oil and Chip Resealing ONLY). Includes the operation of all motorized heavy equipment used in oil and chip rsealing, including but not limited to operating self-propelled chip spreaders, and all types of rollers (both hard and rubber tired); and other duties pertaining to the operation or maintenance of heavy equipment relatd to oil and chip resealing.

Class 1. See Class 1 above for types of equipment operated. Class 2. See Class 2 above for types of equipment operated. Class 3. See Class 3 above for types of equipment operated.

Class 4. See Class 4 above for types of equipment operated.

OPERATING ENGINEER RIVER WORK 1 - operate the following machines when working on River Work and Levee Work on the Mississippi and Ohio Rivers, Lakes and Tributaries: Crane, Shovel, Drageline, Scrapers, Dredge, Derrick, Pile-Driver, Push Boat, all power boat operators, Mechanic, Engineman on Dredge, Leverman on Dredge, All Bituminous Spreader machines, Backhoe, Backfiller, Boom, or Winch Cat, Bituminous Mixplane Machine, Blacksmith, Bituminous Surfacing Machine, Bulldozer, Truck Cranes, Hydraulic Truck Mounted Boom/Crane, Concrete Finishing Machine, or Spreader Machine, Concrete Breaker, Concrete or Pumpcrete Machines, Concrete Plant Operator, All Off Road Material Hauling Equipment, Dinky or Standard Locomotives, Well Drill, Elevating Grader, Fork-Lifts, Flexplane, Gradeall, Hi-Lift, Power Handblade Tugger type Hoist, Hoist Two Drum (or over one), Guyderrick, Hyster, Motor Patrol, Mixers - 21 Cu. Ft. or over, Push Cat, Pulls, & Scrapers, Pumps-Two Well Points, Equipment Greaser, P & H Pulverizer or Pulverizer equal to Pugmill, Pugmill, Rubber-Tired farm type tractor w/Bulldozer/Blade/Auger or Hi-Lift over ½ yard, Skimmer Scoops, Seaman Tiller, Jersey Spreader, Tract-Air used with Drill or Hi-Lift, Trenching or Ditching Machine, Wood Chipper w/Tractor, self-propelled roller w/Blade, Concrete Pumps and Small Equipment Operators.

OPERATING ENGINEER RIVER 2 - when working on River Work and Levee Work on the Mississippi and Ohio Rivers, Lakes and Tributaries shall be employed as the Oiler or Fireman on Crane, Dragline, Shovel, Dredge, Truck Crane, Pile Driver, Gradeall, Dinky or Standard Locomotive, Guy Derrick, Trenching Machine or Ditching Machine 80 H.P. and over, All Terrain (cherry-picker) with over 40 ton Lifting Capacity, Deck Oiler and Deckhands.

#### Other Classifications of Work:

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classifications of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 618/993-7271 for wage rates or clarifications.

#### LANDSCAPING

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.