KANKAKEE VALLEY AIRPORT AUTHORITY KANKAKEE, ILLINOIS


CONSTRUCTION PLANS
FOR
GREATER KANKAKEE AIRPORT

REHABILITATE AIRFIELD LIGHTING SYSTEM - RUNWAY 16/34 AND TAXIWAY H

ILLINOIS PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13



FEBRUARY 29, 2008

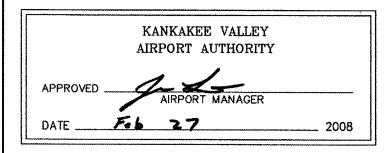

CALL J.U.L.I.E.

BEFORE EXCAVATING

1-800-892-0123

KANKAKEE VALLEY AIRPORTY AUTHORITY

GREATER KANKAKEE AIRPORT


TOWNSHIP: T 30 N


RANGE: R 12 E

SECTIONS 20 & 21

COUNTY: KANKAKEE

TOWNSHIP: OTTO

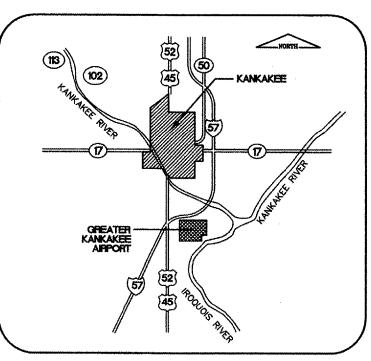


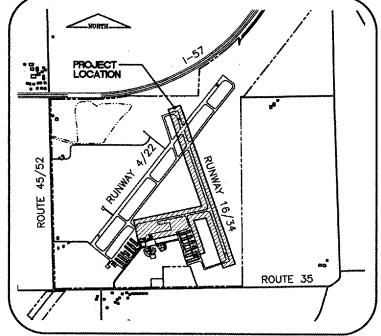

IDOT STANDARDS (INCLUDED WITH SPECIAL PROVISIONS) 814001

DESIGN INFORMATION

DESIGN AIRCRAFT APPROACH CATEGORY B
DESIGN AIRCRAFT GROUP II

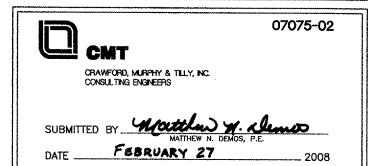

SITE PLAN

LOCATION MAP

0707502\COVER.DWG

SUMMARY OF QUANTITIES

ITEM	DESCRIPTION	UNIT	ESTIMATED	RECORD
NUMBER	DESCRIPTION	OMI	QUANTITY	QUANTITY
AR108108	1/C #8 5KV UG CABLE	5,000	L.F.	
AR108158	1/C #8 5 KV UG CABLE IN UD	23,100	L.F.	
AR110214	4" STEEL DUCT, DIRECT BURY	1,850	L.F.	
AR110314	4" STEEL DUCT, JACKED	80	L.F.	
AR110610	R110610 ELECTRICAL HANDHOLE		EACH	
AR125410	MITL - STAKE MOUNTED	61	EACH	
AR125415	MITL - BASE MOUNTED	10	EACH	
AR125442	TAXI GUIDANCE SIGN, 2 CHARACTER	2	EACH	
AR125470	MODIFY EXISTING SIGN PANEL	8	EACH	
AR125505	R125505 MIRL, STAKE MOUNTED		EACH	
AR125510	125510 MIRL, BASE MOUNTED		EACH	
AR125540	25540 MI THRESHOLD LIGHT STAKE MTD		EACH	
AR125545	MITHRESHOLD LIGHT BASE MTD	4	EACH	
AR125901	REMOVE STAKE MOUNTED LIGHT	101	EACH	
AR125902	REMOVE BASE MOUNTED LIGHT	23	EACH	
AR125904	REMOVE TAXI GUIDANCE SIGN	2	EACH	
AR125964	RELOCATE TAXI GUIDANCE SIGN	1	EACH	
AR150510	ENGINEER'S FIELD OFFICE	1	L.\$.	***************************************


INDEX TO SHEETS

- 1 COVER SHEET
- 2 INDEX TO SHEETS/SUMMARY OF QUANTITIES
- 3 SITE PLAN / PROJECT CONTROL PLAN
- 4 SEQUENCE OF CONSTRUCTION GENERAL NOTES AND DETAILS
- 5 SEQUENCE OF CONSTRUCTION PER AC 150/5370-2E (LATEST EDITION)
- 6 EXISITING CONDITIONS/PROPOSED REMOVALS RUNWAY 16/34 STA. 0+00 TO STA. 11+00
- 7 EXISITNG CONDITIONS/PROPOSED REMOVALS RUNWAY 16/34 STA. 11+00 TO STA. 33+00 8 EXISITNG CONDITIONS/PROPOSED REMOVALS RUNWAY 16/34 - STA, 33+00 TO STA, 44+00
- 9 EXISITNG CONDITIONS/PROPOSED REMOVALS TAXIWAY H STA. 2+00 TO STA. 10+00
- 10 EXISITNG CONDITIONS/PROPOSED REMOVALS TAXIWAY H STA. 10+00 TO STA. 22+00
- 11 AIRFIELD LIGHTING PLAN RUNWAY 16/34 STA, 0+00 TO STA, 11+00
- 12 AIRFIELD LIGHTING PLAN RUNWAY 16/34 STA. 11+00 TO STA. 33+00
- 13 AIRFIELD LIGHTING PLAN RUNWAY 16/34 STA, 33+00 TO STA, 44+00
- 14 AIRFIELD LIGHTING PLAN TAXIWAY H STA, 2+00 TO STA, 10+00
- 15 AIRFIELD LIGHTING PLAN TAXIWAY H STA. 10+00 TO STA, 21+00
- 16 ELECTRICAL DETAILS SHEET 1
- 17 ELECTRICAL DETAILS SHEET 2

	REVIS				
	NUMBER	E	iY	DATE	
		-			
		 			
	0		1	2	
	THIS P	AR IS	EQUAL LE (34	TO 2" X22).	
	AT FULL SCALE (34X22).				
	GREATER KANKAKEE AIRPORT KANKAKEE, ILLINOIS REHABILITATE AIRFIELD LIGHTING SYSTEM -		ANDEX TO SHEETS/	SUMMARY OF QUANTITIES	
	CANTON A FIRM & THEY BUT	CONSULTING ENGNEERS ICENSE No. 184-000613			
	CAWEGE	CONSULTIN License No.			
-				·····	
	DESIGN BY:		**********	ND	
	DRAWN BY:	····		30	
	APPROVED		M	ND	
	DATE:	υI.	02/2	9/08	
	JOB No:		0707	·····	
	IL. PI A.I.P. PRO	ROJECT: 3			
	SHEET	2 QF	17	SHEETS	

KA036 K:\KankakeeAp\0707502\Draw\Sheets FILE: Qty-index.dwg LAYOUT: Layout1 UPDATE BY: Jim Ohse

OPDATE BY: Jim Onse
SURVEY BOOK #
DATE: Thursdoy, April 17, 2008 2:26:34 PM
XREF DWG: tbcInt.dwg
tb.dwg

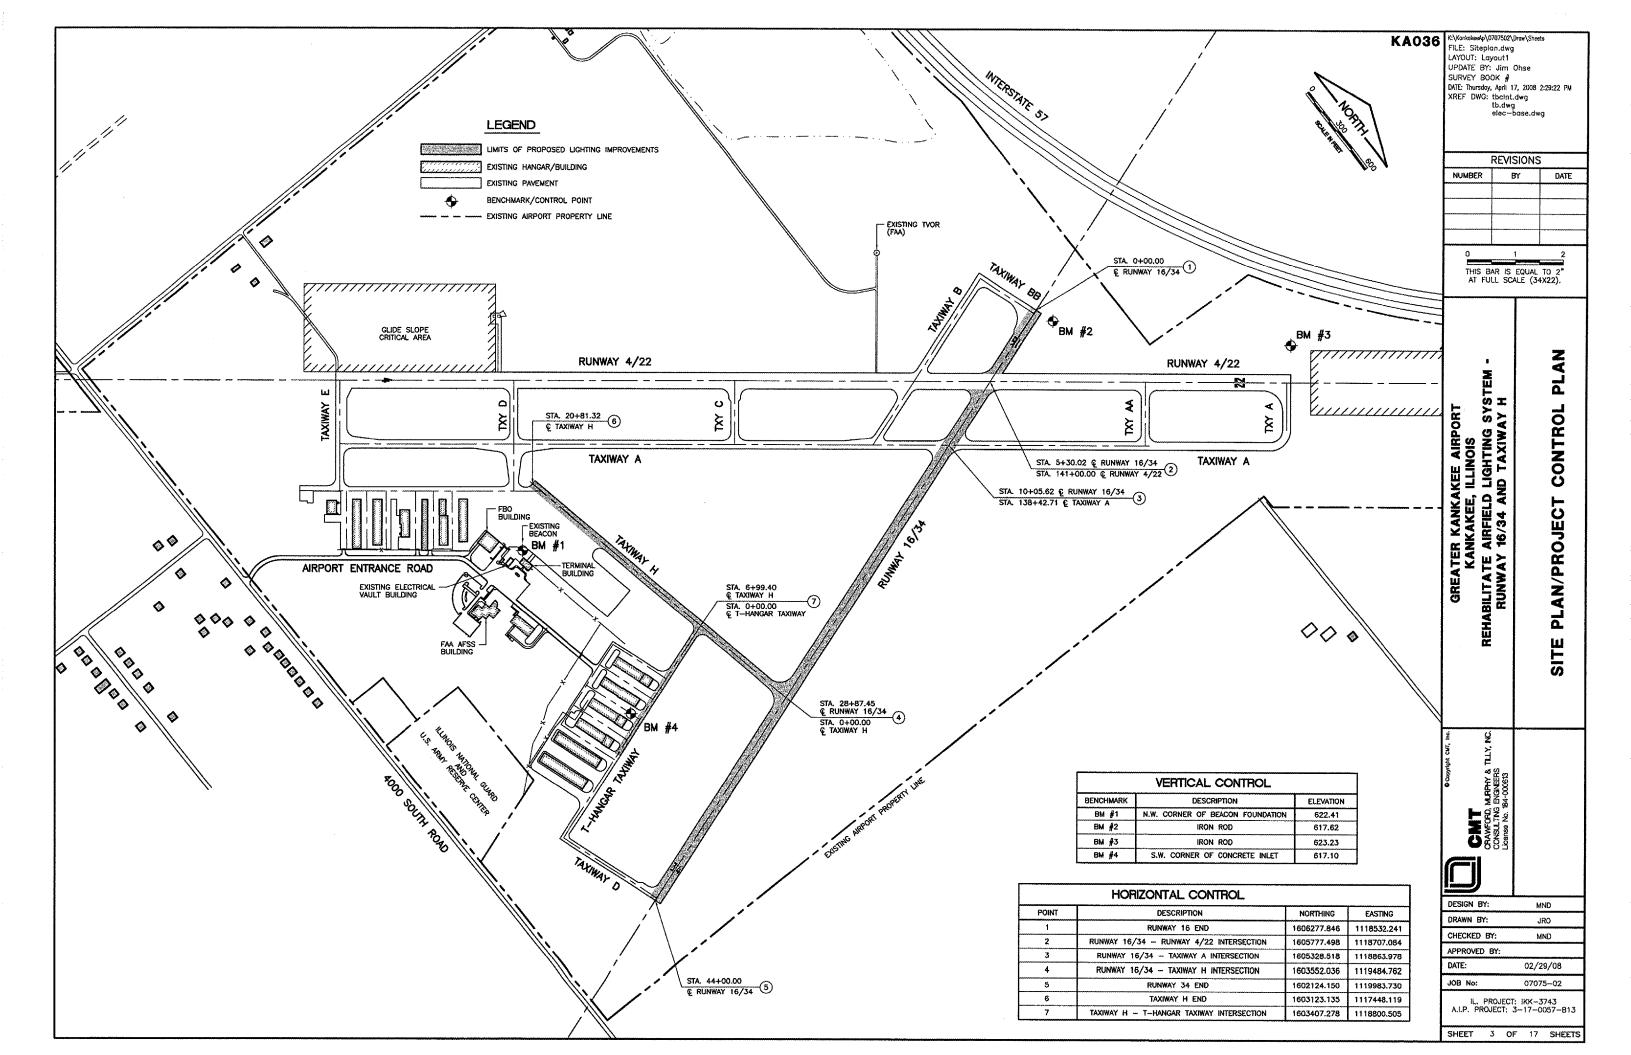

GENERAL NOTES

- 1. THE SUGGESTED SEQUENCE OF CONSTRUCTION SHOWN IS INTENDED TO ALLOW FOR THE ORDERLY CONSTRUCTION OF THE PROPOSED IMPROVEMENTS WHILE MAINTAINING AIRCRAFT ACCESS AT ALL TIMES. THE PHASING SHOWN IS A SUGGESTED SEQUENCE OF CONSTRUCTION ONLY. THIS SEQUENCE MAY BE MODIFIED HOWEVER, ALTERNATE STAGING PLANS MUST MAINTAIN AIRPORT OPERATIONS TO THE SATISFACTION OF THE AIRPORT MANAGER AND RESIDENT ENGINEER AND BE APPROVED BY THE DIVISION OF AERONAUTICS AND FEDERAL AVIATION ADMINISTRATION.
- 2. ALL OPERATIONS SHALL BE IN CONFORMANCE WITH AC 150/5370-2E (LATEST EDITION) SAFETY DURING
- 3. CONTRACTOR'S EQUIPMENT SHALL BE STORED IN THE EQUIPMENT AND MATERIAL STORAGE AREA WHEN CONSTRUCTION IS NOT IN PROGRESS.
- 4. THE AIRPORT MANAGER, IN CONSULTATION WITH THE RESIDENT ENGINEER, SHALL HAVE FINAL SAY IN THE APPROVAL OF THE CONSTRUCTION OPERATING SEQUENCE AS IT RELATES TO PEDESTRIAN, VEHICULAR AND
- 5. ALL EXISTING PAVEMENTS, DRIVES OR ANY OTHER AREAS USED AS A HAUL ROAD OR STORAGE AREA BY THE CONTRACTOR SHALL BE RESTORED IN KIND TO THEIR PRE-CONSTRUCTION CONDITION OR TO THE SATISFACTION OF THE RESIDENT ENGINEER AND AIRPORT MANAGER. THE COST OF MAINTAINING, REPAIRING OR CONSTRUCTING THESE PAVEMENTS AND AREAS SHALL BE INCIDENTAL TO THE CONTRACT. EXISTING RESTORED BY HIM AT HIS EXPENSE TO THE SATISFACTION OF THE RESIDENT ENGINEER AND THE REPORT MANAGER. AREAS OUTSIDE THE PROJECT LIMITS WHICH ARE DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL
- THE CONTRACTOR SHALL KEEP ALL TRUCKS, EQUIPMENT AND MATERIALS OFF OF THE EXISTING TAXIWAYS, APRONS AND RUNWAYS OUTSIDE OF THE PROJECT LIMITS EXCEPT AS SHOWN OR WITH THE PRIOR PERMISSION OF THE RESIDENT ENGINEER.
- WORK PERFORMED BY THE CONTRACTOR OUTSIDE OF DAYLIGHT HOURS SHALL BE DONE UNDER SUFFICIENT ARTIFICIAL LIGHTING TO ALLOW FOR PROPER CONSTRUCTION METHODS AND INSPECTIONS. LIGHT SHALL CONSIST OF MOVABLE POLE MOUNTED FLOODLIGHTS AND/OR SPOTLIGHTS OF SUFFICIENT NUMBER TO ILLUMINATE THE WORK AREA. VEHICLE HEADLIGHTS WILL BE ALLOWED ONLY IN ADDITION TO OTHER LIGHTS MENTIONED ABOVE. LIGHTING SHALL BE AS APPROVED BY THE ENGINEER AND SHALL NOT BE USED IF THEY AFFECT FLIGHT SAFETY. CONTRACTOR'S WORK HOURS SHALL BE IN ACCORDANCE WITH LOCAL
- 8. THE CONTRACTOR SHALL PROVIDE PORTABLE FLOOD LIGHTING FOR NIGHTIME CONSTRUCTION, SUFFICIENT UNITS SHALL BE PROVIDED SO THAT WORK AREAS ARE ILLUMINATED TO A LEVEL OF FIVE HORIZONTAL FOOT CANDLES. THE LIGHTING LEVELS SHALL BE CALCULATED AND MEASURED IN ACCORDANCE WITH THE CURRENT STANDARDS OF THE ILLUMINATION ENGINEERING SOCIETY. LIGHTS SHALL BE POSITIONED SO AS NOT TO INTERFERE WITH AIRPORT OPERATIONS
- 9. THE CONTRACTOR WILL BE REQUIRED TO HAVE A SWEEPER AVAILABLE FOR USE AT ALL TIMES. WHEN ACTIVE AIRRIELD PAVEMENTS ARE UTILIZED AS HAUL ROADS BY THE CONTRACTOR, MATERIAL TRACKED ON TO THE PAVEMENT SHALL BE CONTINUALLY REMOVED WITH SAID SWEEPER. THIS SWEEPING SHALL NOT BE PAID FOR SEPERATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
- 10. MATERIALS REMOVED FROM THE PROJECT WILL BE DISPOSED OF OFF AIRPORT PROPERTY, UNLESS NOTED
- 11. FOR WORK ON AIRPORT PROPERTY: PAYMENT FOR TRAFFIC CONTROL INCLUDING, BUT NOT LIMITED TO BARRICADES, SIGNING, RUNWAY CLOSED MARKERS, AIR OPERATIONS AREA (A.O.A.) LATHE AND RIBBON, ETC. SHALL NOT BE PAID SEPARATELY, BUT SHALL BE CONSIDERED INCIDENTAL. TO THE CONTRACT. BARRICADES AT 10-FOOT CENTERS WITH ONE ORANGE FLAG (24" x 24") BETWEEN EACH SET OF BARRICADES SHALL BE PLACED AT THE LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER. BARRICADES SHALL HAVE A FLASHING RED LIGHT AND CONFORM TO IDOT STANDARD 702001, TYPE II. BARRICADE INSTALLATION WILL BE REQUIRED DEPORT OF MARKET AND CONFORM TO IDOT STANDARD 702001, TYPE II. BARRICADE INSTALLATION WILL BE REQUIRED. PRIOR TO ACCESS TO THE A.O.A. BY CONTRACTOR'S WORKERS, EQUIPMENT OR MATERIAL SIGNS SHALL BE PLACED AT EACH TAXIWAY/RUNWAY CLOSURE LOCATION AND SHALL BE ATTACHED TO THE BARRICADES. EACH BARRICADE LOCATION SHALL CONSIST OF ONE "DO NOT ENTER" SIGN AND ONE "AIRCRAFT MOVEMENT AREA" SIGN. SIGNS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
- 12. THE CONTRACTOR SHALL CONTACT THE AIRPORT MANAGER (5) WORKING DAYS IN ADVANCE OF THE START OF CONSTRUCTION SO THAT THE APPROPRIATE NOTAMS MAY BE ISSUED.
- 13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ALL CONSTRUCTION ACCESS GATES CLOSED DURING NON WORKING HOURS. THE CONTRACTOR SHALL PROVIDE A SIGN AT THE ACCESS GATE SAYING "AUTHORIZED PERSONNEL ONLY". THE CONTRACTOR SHALL CLOSE AND LOCK THE ACCESS GATE UPON LEAVING THE SITE. THROUGHOUT THE DURATION OF THE CONTRACT, ANY DAMAGES TO THE ACCESS ROAD, ACCESS GATE OR FENCING ADJACENT TO THE PROJECT SHALL BE REPAIRED BY THE CONTRACTOR TO THE ITISFACTION OF THE RESIDENT ENGINEER. ALL COST RELATING TO CONTRACTOR'S ACCESS AND SECURITY
- 14. CONTRACTOR WILL BE REQUIRED TO PUT AIRPORT FLAGS AND HAVE BEACON LIGHTS ON ALL EQUIPMENT AT ALL TIMES DURING CONSTRUCTION (SEE FLAG DETAIL, THIS SHEET).
- 15. IN THE CASE OF AN EMERGENCY, CONTRACTOR SHALL NOTIFY AIRPORT MANAGER AND THE RESIDENT ENGINEER IMMEDIATELY.
- 16. DURING ADVERSE WEATHER, THE CONTRACTOR SHALL MAKE PROVISIONS FOR ACCESS TO THE WORK AT NO ADDITIONAL COST TO THE CONTRACT. NO EXTENSION OF CONTRACT TIME WILL BE CONSIDERED FOR DELAYS DUE TO LACK OF ADEQUATE ACCESS TO THE WORK.
- 17. THE AIRPORT WILL BE IN OPERATION DURING THE CONSTRUCTION OF THIS PROJECT. COORDINATION OF WORK WITH THE AIRPORT IS MANDATORY SO AS TO MINIMIZE IMPACTS ON AIRPORT OPERATIONS.
- 18. APPROXIMATE LOCATION OF HAUL ROUTES ON THE AIRPORT SITE ARE SHOWN ON THE GENERAL PROJECT LAYOUT AND THE PHASING PLANS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE OFF-SITE HAUL ROUTES (STATE HIGHWAYS, COUNTY ROADS OR CITY STREETS) WITH THE APROPRIATE OWNER WHO HAS JURISDICTION OVER THE AFFECTED ROUTE. ON-SITE ROADS USED AS HAUL ROUTES OWNER WHO HAS JURISDICTION OVER THE AFFECTED ROUTE. ON-SITE ROADS USED AS HAUL ROUTES SHALL BE MAINTAINED BY THE CONTRACTOR AND SHALL BE RESTORED AT THE CONTRACTOR'S EXPENSE TO THEIR ORIGINAL CONDITION UPON COMPLETION OF BEING USED AS A HAUL ROUTE. THE BEFORE AND AFTER CONDITION OF ON-SITE HAUL ROUTES SHALL BE JOINTLY INSPECTED AND DETERMINED BY THE CONTRACTOR AND THE RESIDENT ENGINEER. FENCING, DRAINAGE, GRADING AND OTHER MISCELLANEOUS CONSTRUCTION REQUIRED TO CONSTRUCT TEMPORARY HAUL ROUTES OR ACCESS POINTS ON THE AIRPORT WILL BE THE CONTRACTOR'S TOTAL RESPONSIBILITY AND SHALL BE APPROVED BY THE RESIDENT ENGINEER PRIOR TO THE WORK. ALL ON-SITE ACCESS ROADS TO AIRPORT FACILITIES SHALL SEMAIN OPEN AND MAINTAINED AT ALL THIES REMAIN OPEN AND MAINTAINED AT ALL TIMES.
- 19. MOBILIZATION/EQUIPMENT STORAGE AREA WILL BE MADE AVAILABLE FOR CONTRACTOR'S MOBILIZATION AND STORAGE AS SHOWN ON THE PLANS. THIS AREA SHALL BE RESTORED TO THE ORIGINAL CONDITION UPON COMPLETION OF THE PROJECT AT THE CONTRACTOR'S EXPENSE.
- 20. LOCATION OF KNOWN EXISTING AIRPORT UNDERGROUND CABLES ARE SHOWN ON THE PLANS AND MUST BE VERIFIED BY THE CONTRACTOR, REPAIR OF DAMAGED CABLE MUST BE STARTED IMMEDIATELY AND CONTINUED UNTIL COMPLETED. ALL SUCH REPAIRS SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS, OR AS DIRECTED BY THE OWNER OF THE CABLE, AND SHALL BE AT THE CONTRACTOR'S EXPENSE. IF FAA CABLES ARE DAMAGED, REPAIRS SHALL BE DONE FROM POINT TO POINT IN ACCORDANCE WITH FAA REQUIREMENTS AND IN THE PRESENCE OF A FAA REPRESENTATIVE. THE OWNER MAY ELECT TO HAVE THE REPAIR PERFEORMED BY DITHERS IN WHICH CASE THE CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE THE INCIDENCE OF THE PERFECT OF THE PERFE PAYING THE INCURRED COSTS OF REPAIRS.

- 21. COORDINATION MEETINGS THE CONTRACTOR SHALL CONDUCT WEEKLY COORDINATION MEETINGS TO DISCUSS WORK AREAS AND SCHEDULING, ETC. WITH THE RESIDENT ENGINEER, AIRPORT OPERATIONS, FAA, AND OTHER APPROPRIATE OFFICIALS MINUTES FROM THE WEEKLY MEETINGS SHALL BE PREPARED BY THE CONTRACTOR, FURNISHED TO ALL ATTENDEES PRIOR TO THE SUBSEQUENT MEETING, AND KEPT ON FILE AT THE FIELD OFFICE. THE COORDINATION MEETING COSTS SHALL BE CONSIDERED INCIDENTAL TO
- 22. THE CONTRACTOR SHALL PROVIDE THE PHONE NUMBERS OF THREE PERSONNEL, INCLUDING THE PROJECT SUPERINTENDENT, WHO MAY BE CONTACTED IN AN EMERGENCY. PERSONNEL SHALL BE ON CALL 24 HOURS PER DAY FOR MAINTAINING AIRPORT HAZARD LIGHTING AND BARRICADES.
- 23. VEHICLES AND EQUIPMENT SHALL NOT BE ALLOWED WITHIN THE AIR OPERATIONS AREA (A.O.A.) FOR ACTIVE TAXIWAYS/RUNWAYS UNLESS OTHERWISE APPROVED BY THE AIRPORT MANAGER.
- 24. CONTRACTOR SHALL STORE EQUIPMENT AND MATERIALS IN SUCH A MANNER AS NOT TO VIOLATE FEDERAL AMATION ADMINISTRATION PART 77 SURFACES OR RUNWAY AND TAXIWAY SAFETY AREAS.
- 25. ALL EXISTING TAXIWAY AND RUNWAY AIRFIELD LIGHTING CIRCUITS, FAA CABLES AND OTHER ELECTRICAL CABLES SHALL REMAIN IN SERVICE AT ALL TIMES. ALL EXISTING LIGHTING AND VAULT EQUIPMENT SHALL REMAIN IN SERVICE UNTIL PROPOSED IMPROVEMENTS ARE INSTALLED AND OPERATIONAL, UNLESS OTHERWISE APPROVED BY THE ENGINEER. ANY CABLES DAMAGED BY THE CONTRACTOR SHALL BE
- 26. COORDINATION BY THE CONTRACTOR WITH THE EXISTING UTILITIES SHALL BE COMPLETED BEFORE CONSTRUCTION IS STARTED. CONTRACTOR IS REFERRED TO SECTION 50-17 OF THE SPECIAL PROVISIONS FOR SPECIFIC REQUIREMENTS. THE LOCATION OF UNDERGROUND UTILITIES AS INDICATED ON THE PLANS HAS BEEN OBTAINED FROM EXISTING RECORDS. NEITHER THE OWNER OR THE DESIGN ENGINEER ASSUME ANY RESPONSIBILITY WHATEVER IN RESPECT TO THE ACCURACY, COMPLETENESS OR SUFFICIENCY OF THE INFORMATION. THERE IS NO QUARANTEE, EITHER EXPRESSED OR IMPLIED THAT THE LOCATIONS, SIZE AND TYPE MATERIAL OF EXISTING UNDERGROUND UTILITIES AS INDICATED ARE REPRESENTATIVE OF THOSE TO TYPE MATERIAL OF EXISTING UNDERGROUND UTILITIES AS INDICATED ARE REPRESENTATIVE OF THOSE TO BE ENCOUNTERED DURING CONSTRUCTION. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE ACTUAL LOCATION OF ALL SUCH FACILITIES, INCLUDING SERVICE CONNECTIONS TO UNDERGROUND UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE UTILITY COMPANY OF HIS OPERATIONAL PLANS. THE CONTRACTOR SHALL MAKE ARRANGEMENTS FOR DETAILED INFORMATION AND ASSISTANCE IN LOCATING UTILITIES, IN THE EVENT AN UNEXPECTED UTILITY INTERFERENCE IS ENCOUNTERED DURING CONSTRUCTION, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE UTILITY COMPANY, THE RESIDENT ENGINEER AND THE AIRPORT MANAGER. ANY SUCH MAINS AND/OR SERVICES DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL BE RESTORED IMMEDIATELY AT HIS EVENTS OF THE CATISEACTION OF THE PESIDENT FACILIFY MAND AIRPORT MANAGER. EXPENSE TO THE SATISFACTION OF THE RESIDENT ENGINEER AND AIRPORT MANAGER.
- 27. ALL AIRFIELD LIGHTING AND LIGHTING GUIDANCE SYSTEMS (NAVAIDS) LOCATED WITHIN AND IMMEDIATELY ADJACENT TO THE CONTRACTORS WORK ZONE SHALL BE CHECKED FOR OPERATIONAL CONDITION PRIOR TO THE DEPARTURE FROM THE AIRPORT WITH THE AIRPORT MAINTENANCE, ANY DEFECIENCIES IN THESE SYSTEMS DUE TO THE ACTS OF CONTRACTOR OR HIS SUBCONTRACTORS, SUPPLIERS OR CONSULTANTS

CONTRACTOR CROSSING RUNWAY AND TAXIWAY AIR OPERATIONS AREA (A.O.A.)

- A. ANYTIME THE CONTRACTOR IS REQUIRED TO UTILIZE OR CROSS ACTIVE AIRFIELD PAVEMENTS FOR ACCESS TO ANYTIME THE CONTRACTOR IS REQUIRED TO UTILIZE OR CROSS ACTIVE AIRFIELD PAVEMENTS FOR ACCESS TO AND FROM THE WORK ZONE, A FULL TIME CROSSING GUARD IN RADIO CONTRACT WITH THE AIR TRAFFIC SHALL BE FURNISHED BY THE CONTRACTOR FOR MOVEMENTS OF VEHICLES OR EQUIPMENT TO AND FROM THE WORK ZONE. THE RADIO OPERATOR SHALL BE FAMILIAR WITH AIRPORT GROUND CONTROL PROCEDURES AND DEMONSTRATE KNOWLEDGE OF SAME TO THE AIRPORT. THE AIRPORT RESERVES THE RIGHT TO APPROVE THE CROSSING GUARDS. THE CONTRACTOR SHALL PROVIDE THEIR OWN RADIOS. THIS COST SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PAYMENT OF MUNICIPAL FINES (\$500 PER OCCURENCE) DUE TO AIRFIELD INCURSIONS BY HIS EMPLOYEES, SUBCONTRACTORS, SUPPLIERS, CONSULTANTS AND/OR AGENTS.
- B. ANY PAVEMENT DAMAGED BY CONTRACTOR'S OPERATIONS SHALL BE REPAIRED IMMEDIATELY BY HIM TO THE SATISFACTION OF THE RESIDENT ENGINEER AND AIRPORT MANAGER AT NO ADDITIONAL COST TO THE OWNER. PAVEMENT SHALL BE CONTINUALLY SWEPT TO PROVIDE DEBRIS FREE SURFACE DURING ALL HAUL ROAD OPERATIONS. THIS COST SHALL NOT BE PAID SEPERATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE
- C. WORK WITHIN THE A.O.A. SHALL BE EXPEDITED. ANY DROP OFF SHALL BE ADEQUATELY LIGHTED, SIGNED AND BARRICADED. NO MATERIAL SHALL BE STOCKFILED WITHIN THE A.O.A. SHOULD IT BE NECESSARY FOR THE CONTRACTOR TO TEMPORARILY RELOCATE EQUIPMENT TO ALLOW AIRCRAFT O PASS, THEY SHALL DO SO AT NO EXTRA COST TO THE PROJECT. THE CONTRACTOR SHALL NOTIFY THE RESIDENT ENGINEER AND AIRPORT MANAGER TWO (2) WORKING DAYS IN ADVANCE OF ANY PLANNED CONSTRUCTION WITHIN THESE LIMITS.

LIMITATIONS ON CONSTRUCTION WITHIN AIRPORT OPERATIONS AREA (A.O.A.)

ANY WORK WITHIN THE A.O.A. OF AN ACTIVE RUNWAY SHALL EITHER BE DONE ON WEEKENDS, OFF-PEAK DAYTIME OR NIGHTIME HOURS, LOCAL TIME AS SHOWN ON THE SEQUENCE OF CONSTRUCTION PLAN SHEETS. ON ANY DAY WHEN CONSTRUCTION IS WITHIN THE A.O.A. OF THE RUNWAY, THE RUNWAY SHALL BE CLOSED. THE CONTRACTOR SHALL NOTIFY THE RESIDENT ENGINEER AND AIRPORT MANAGER TWO (2) WORKING DAYS IN ADVANCE OF ANY PLANNED CONSTRUCTION WITHIN THESE LIMITS. STEEL PLATES IF NECCESSARY SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR TO COVER ANY OPEN TRENCHES OR EXCAVATION WITHIN THE A.O.A. IF DURING RUNWAY CLOSURE AN EMERGENCY IS DECLARED, THE CONTRACTOR SHALL IMMEDIATELY CLEAR THE RUNWAY OF ALL VEHICLES, MEN AND EQUIPMENT.

TAXIWAYS / TAXILANES / APRONS:

CONSTRUCTION WILL BE ALLOWED UP TO THE EDGE OF PAVEMENTS WITHOUT CLOSURE ON A LIMITED BASIS. WORK WITHIN THE A.O.A. SHALL BE EXPEDITED. ANY DROP OFF SHALL BE ADEQUATELY LIGHTED, SIGNED AND BARRICADED. NO MATERIAL SHALL BE STOCKPILED WITHIN THE A.O.A. SHOULD IT BE NECESSARY FOR THE CONTRACTOR TO TEMPORARILY RELOCATE EQUIPMENT TO ALLOW AIRCRAFT TO PASS, THEY SHALL DO SO AT NO EXTRA COST TO THE PROJECT. THE CONTRACTOR SHALL NOTIFY THE RESIDENT ENGINEER AND AIRPORT MANAGER TWO (2) WORKING DAYS IN ADVANCE OF ANY PLANNED CONSTRUCTION WITHIN THESE LIMITS.


NOTE - ALL PHASES
ALL EXISTING TAXIWAY AND RUNWAY AIRFIELD LIGHTING CIRCUITS, FAA CABLES AND OTHER AIRPORT
ELECTRICAL CABLES SHALL REMAIN IN SERVICE UNTIL REPLACED AS ACCEPTABLE TO THE RESIDENT
ENGINEER. ALL TEMPORARY CABLING AND SPLICING NECESSARY TO KEEP THE CIRCUITS IN OPERATION SHALL BE CONSIDERED INCIDENTAL TO CONTRACT.



ON PAVEMENT **CLOSED RUNWAY MARKER DETAIL**

CLOSED RUNWAY MARKER DETAIL NOTES

- 1. CLOSED RUNWAY MARKERS SHALL BE SOLID YELLOW
- 2. MARKERS SHALL BE MATERIAL APPROVED BY THE ENGINEER.
- 3. CONTRACTOR SHALL MAINTAIN AND RELOCATE MARKERS AS SHOWN ON THE PLANS OR AS NEEDED TO FACILITATE CONSTRUCTION
- MARKERS ON PAVEMENT SHALL BE PLACED OVER EXISTING RUNWAY NUMERALS AT BOTH
- COST OF FURNISHING, INSTALLING, MAINTAINING AND REMOVING MARKERS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
- 6. DURING VARIOUS PHASES OF WORK, IT WILL BE NECESSARY TO CLOSE RUNWAYS TO AIR TRAFFIC ON A TEMPORARY BASIS AS COORDINATED WITH THE AIRPORT. THE CONTRACTOR SHALL MARK THE RUNWAYS TO BE CLOSED BY PLACING A YELLOW CROSS AT THE LOCATION AND DIMENSIONS DETAILED ON THIS SHEET. THE CROSSES ARE SHOWN ON THE RESPECTIVE RUNWAYS ACCORDING TO THE VARIOUS PHASES OF WORK AS DELINEATED IN THE SUGGESTED SEQUENCE OF CONSTRUCTION.




FLASHER BARRICADE DETAIL

N.T.S.

NOTES

- FLASHERS TO BE BATTERY OPERATED. LENS TO BE RED AND BE ABLE TO ROTATE 90 DEGREES.
- SANDBAGS TO BE PLACED ON EACH SUPPORT BRACE AS REQUIRED TO PREVENT DISPLACEMENT BY WIND, JET OR PROP BLAST.
- NO SEPARATE PAYMENT WILL BE MADE FOR THIS ITEM. COSTS SHALL BE CONSIDERED INCIDENTAL TO THE PROJECT.
- 4. PLACE AT TEN-FOOT (10') INTERVALS.
- 5. ONE 20"x20" ORANGE FLAG TO BE INSTALLED ON EACH BARRICADE.

MAXIMUM ANTICIPATED HEIGHT OF CONSTRUCTION EQUIPMENT: 20 FEET



CONSTRUCTION EQUIPMENT AND TRUCK SIGNAL FLAG

CONTRACTOR SHALL PLAN AND PERFORM HIS WORK SO AS NOT TO INTERFERE OR HINDER THE PROGRESS, WORK OR HAVE ROAD ACCESS OF OTHER CONTRACTORS (SEE SPECIAL PROVISIONS SECTION 30-05). THE PRIME CONTRACTOR WILL BE RESPONSIBLE TO COORDINATE CONSTRUCTION

- RUNWAY 16/34 CRACK SEALING
- · RUNWAY 16/34 PAVEMENT MARKING.

K:\KankakeeAp\0707502\Draw\Sheet **KA036** FILE: Sea-1.dwa LAYOUT: Layout1 UPDATE BY: Jim Ohse SURVEY BOOK # DATE: Thursday, April 17, 2008 2:27:29 PM XREF DWG: tbclnt.dwg tb.dwg

> REVISIONS NUMBER BY DATE

THIS BAR IS EQUAL TO 2 AT FULL SCALE (34X22)

TEX ER KANKAKEE AIRPORT ANKAKEE, ILLINOIS AIRFIELD LIGHTING SYS 7 16/34 AND TAXIWAY H RUC DE: ONST Öσ GREATER KANK KANK NBILITATE AII RUNWAY 16 00 шZ AC EQUE! REHA S

ACTIVITIES AND ACCESS BETWEEN ALL ON-SITE CONTRACTORS SUBCONTRACTORS. IT IS ANTICIPATED THE FOLLOWING PROJECTS MAY BE UNDER CONSTRUCTION CONCURRENTLY WITH THIS PROJECT:

JOB No: 07075~02 .. PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13 SHEET 4 OF 17 SHEETS

MND

JRO

MND

02/29/08


CRAWFO CONSULT

DESIGN BY:

DRAWN BY

CHECKED BY


APPROVED BY:

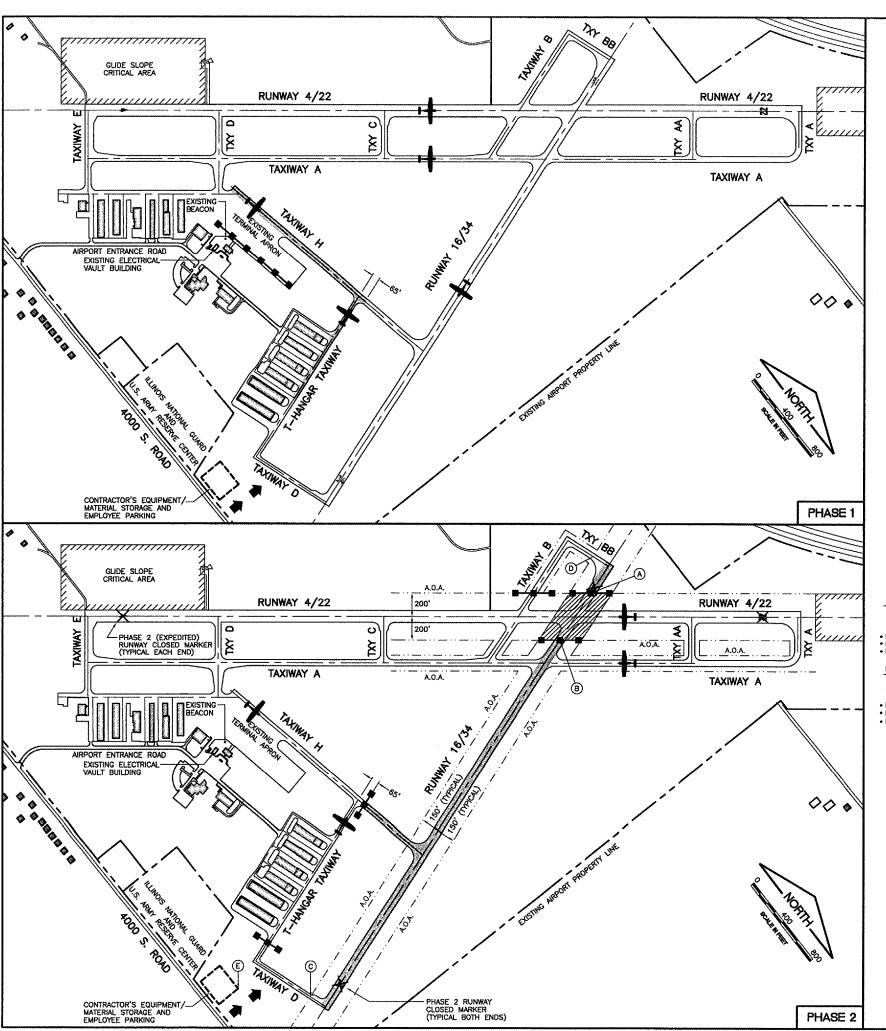

PHASE 1 NOTES

- THE CONTRACTOR SHALL PLACE ALL BARRICADES AS SHOWN PRIOR TO STARTING WORK ON THIS
 PHASE OR AS DIRECTED BY THE RESIDENT ENGINEER.
- 2. MARK THE AIR OPERATIONS AREA (A.O.A.) WITH LATHE AND RIBBON AS SHOWN BY THE CONSTRUCTION SETBACK LINE OR AS DIRECTED BY THE RESIDENT ENGINEER.
- 3. THE AIRPORT WILL REQUIRE THREE (3) CALENDAR DAYS NOTICE FROM THE CONTRACTOR PRIOR TO INITIATING THIS PHASE TO COORDINATE WITH THE TENANTS.
- 4. FOR ALL PHASES OF WORK, THE CONTRACTOR SHALL RETURN THE EQUIPMENT TO THE STAGING AND STORAGE AREA UNLESS PERMISSION IS GIVEN BY THE AIRPORT TO DO OTHERWISE.
- CONTRACTOR SHALL HAVE A DEDICATED FLAGGER ONSITE WHEN WORKING ADJACENT TO ACTIVE TAXIWAYS AND YIELD TO ALL ONCOMING AIRCRAFT. COST SHALL BE INCIDENTAL TO THE CONTRACT.

LEGEND



AIR OPERATIONS AREA (A.O.A.) ACTIVE RUNWAY 16/34 150' CENTERLINE TO A.O.A. ACTIVE RUNWAY 4/22 200' CENTERLINE TO A.O.A. ACTIVE TAXIWAYS 65' CENTERLINE TO A.O.A.

DESIGN AIRCRAFT APPROACH CATEGORY: D DESIGN AIRPORT GROUP: II

MAXIMUM ANTICIPATED HEIGHT OF CONSTRUCTION EQUIPMENT: 20 FEET

POINT "A"

NEAREST POINT ON CONSTRUCTION SITE TO ACTIVE RUNWAY 4/22

• LATITUDE: 41°04'30.818 (NAD 83) • LONGITUDE: 87°50'45.411" (NAD 83) • EXISTING ELEVATION: 621.2

POINT "B"

NEAREST POINT ON CONSTRUCTION SITE TO ACTIVE RUNWAY 4/22

• LATITUDE: 41°04°26.373" (NAD 83) • LONGITUDE: 87°50'43.395" (NAD 83) • EXISTING ELEVATION: 621.1

POINT "C"

NEAREST POINT ON CONSTRUCTION SITE TO ACTIVE RUNWAY 16/34 (34 END)

• LATITUDE: 41°03'52.110" (NAD 83) • LONGITUDE: 87°50'29.929" (NAD 83) • EXISTING ELEVATION: 615.4

POINT "D"

NEAREST POINT ON CONSTRUCTION SITE TO ACTIVE RUNWAY 16/34 (16 END)

• LATITUDE: 41"04"32.834" (NAD 83) • LONGITUDE: 87"50"48.395" (NAD 83) • EXISTING ELEVATION: 618.5

POINT "E"

NEAREST POINT ON CONSTRUCTION SITE TO ACTIVE RUNWAY 16/34

• LATITUDE: 41'03'47.827" (NAD 83) • LONGITUDE: 87"50'35.510" (NAD 83) • EXISTING ELEVATION: 615.0

PHASE 2 NOTES

- THE CONTRACTOR SHALL PLACE ALL BARRICADES AS SHOWN PRIOR TO STARTING WORK ON THIS PHASE OR AS DIRECTED BY THE RESIDENT ENGINEER.
- MARK THE AIR OPERATIONS AREA (A.O.A.) WITH LATHE AND RIBBON AS SHOWN BY THE CONSTRUCTION SETBACK LINE OR AS DIRECTED BY THE RESIDENT ENGINEER.
- 3. THE AIRPORT WILL REQUIRE SEVEN (7) CALENDAR DAYS NOTICE FROM THE CONTRACTOR PRIOR TO INITIATING THIS PHASE TO COORDINATE WITH THE TENANTS.
- 4. THE CONTRACTOR MAY WORK IN THE PHASE 1 WORK AREA PROVIDED THAT IT DOES NOT IMPACT THE PROGRESS OF THE PHASE 2 WORK AND AIRCRAFT OPERATIONS ARE MAINTAINED.
- 5. PHASE 2 EXPEDITED WORK AREA DESCRIPTION. THE WORK TO BE COMPLETED WITHIN THE PHASE 2 EXPEDITED WORK AREA SHALL BE COMPLETED WITHIN 4 CALENDAR DAYS. AN APPROVED PHASE 2 EXPEDITED WORK AREA SCHEDULE SHALL BE SUBMITTED TO THE AIRPORT MANAGER AND RESIDENT ENGINEER 48 HOURS PRIOR TO THE START OF SAID CONSTRUCTION. ACCESS TO THE AIRPIELD PAVEMENT SHALL BE MADE AVAILABLE AT ALL TIMES TO AIRCRAFT AND AIRPORT PERSONNEL. THE AREA SHALL BE KEPT FREE OF DUST AND DEBRIS AT ALL TIMES DURING CONSTRUCTION. SHOULD IT BE NECESSARY TO CLOSE BOTH RUNWAYS SIMULTANEOUSLY THE CONTRACTOR SHALL NOT HAVE BOTH RUNWAYS CLOSED FOR MORE THAN 6 HOURS. THE AIRPORT MANAGER HAS THE RIGHT TO, AT NO EXTRA COST TO THE CONTRACT, RESCHEDULE THE EXPEDITED WORK TO ACCOMODATE AIRPORT ACTIVITIES. COST OF THE EXPEDITED CONSTRUCTION SHALL BE CONSIDERED INCIDENTAL TO THE ASSOCIATED PAY ITEMS.
- FOR ALL PHASES OF WORK, THE CONTRACTOR SHALL RETURN THE EQUIPMENT TO THE STAGING AND STORAGE AREA UNLESS PERMISSION IS GIVEN BY THE AIRPORT TO DO OTHERWISE.
- CONTRACTOR SHALL HAVE A DEDICATED FLAGGER ONSITE WHEN WORKING ADJACENT TO ACTIVE TAXIWAYS AND YIELD TO ALL ONCOMING AIRCRAFT. COST SHALL BE INCIDENTAL TO THE CONTRACT.

K:\KankakeeAp\0707502\Draw\Sheets FILE: Seq-2.dwg LAYOUT: Layout1 UPDATE BY: Jim Ohse SURVEY BOOK # DATE: Thursday, April 17, 2008 2:28:32 PM XREF DWG: tbcint.dwg tb.dwg elec-base.dwg

KA036

REVISIONS				
NUMBER	BY	DATE		
0	1	2		
THIS BAR IS EQUAL TO 2"				

AT FULL SCALE (34X22).

TON SYST AY H Ö⊢ ANKAKEE, ILLINOIS : Airfield Lighting 8 ? 16/34 and taxiwa $\supset \omega$ TE SA ŬШ OF (70-2E) IABILITATE RUNWAY 国の SW QUEN. ЩO SA


5 MND DRAWN BY: JRO CHECKED BY: MND APPROVED BY:


07075-02 IL. PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13


02/29/08

SHEET 5 OF 17 SHEETS


DATE:

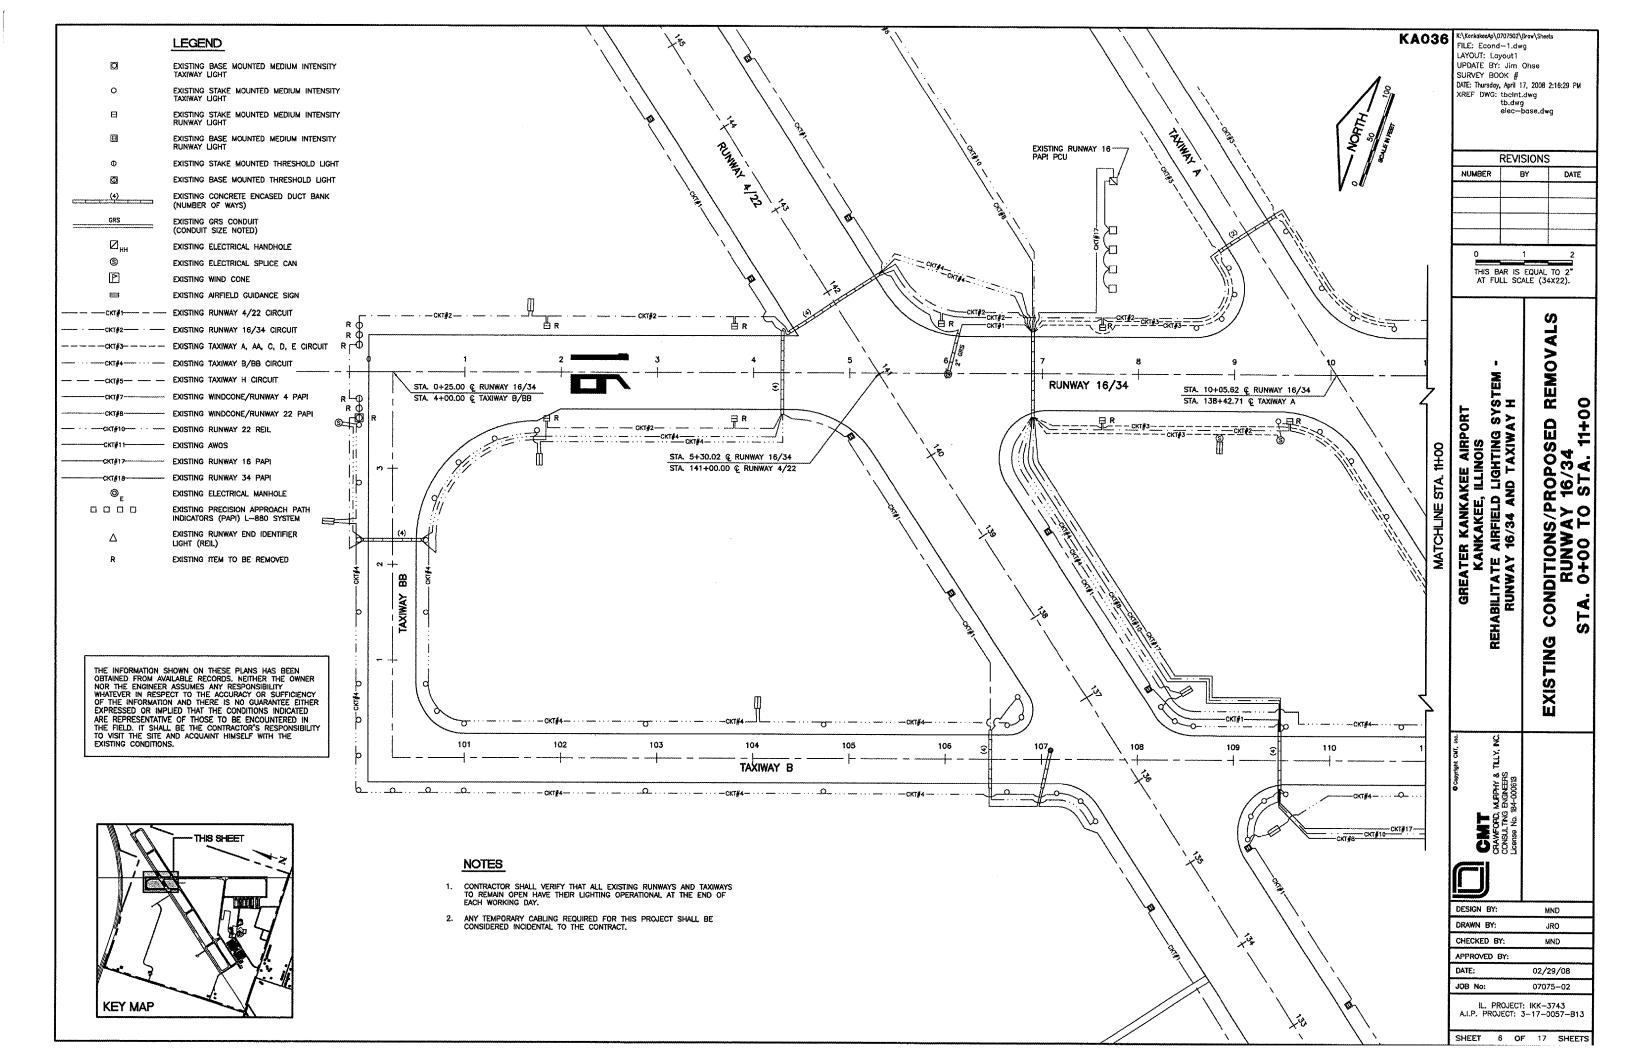


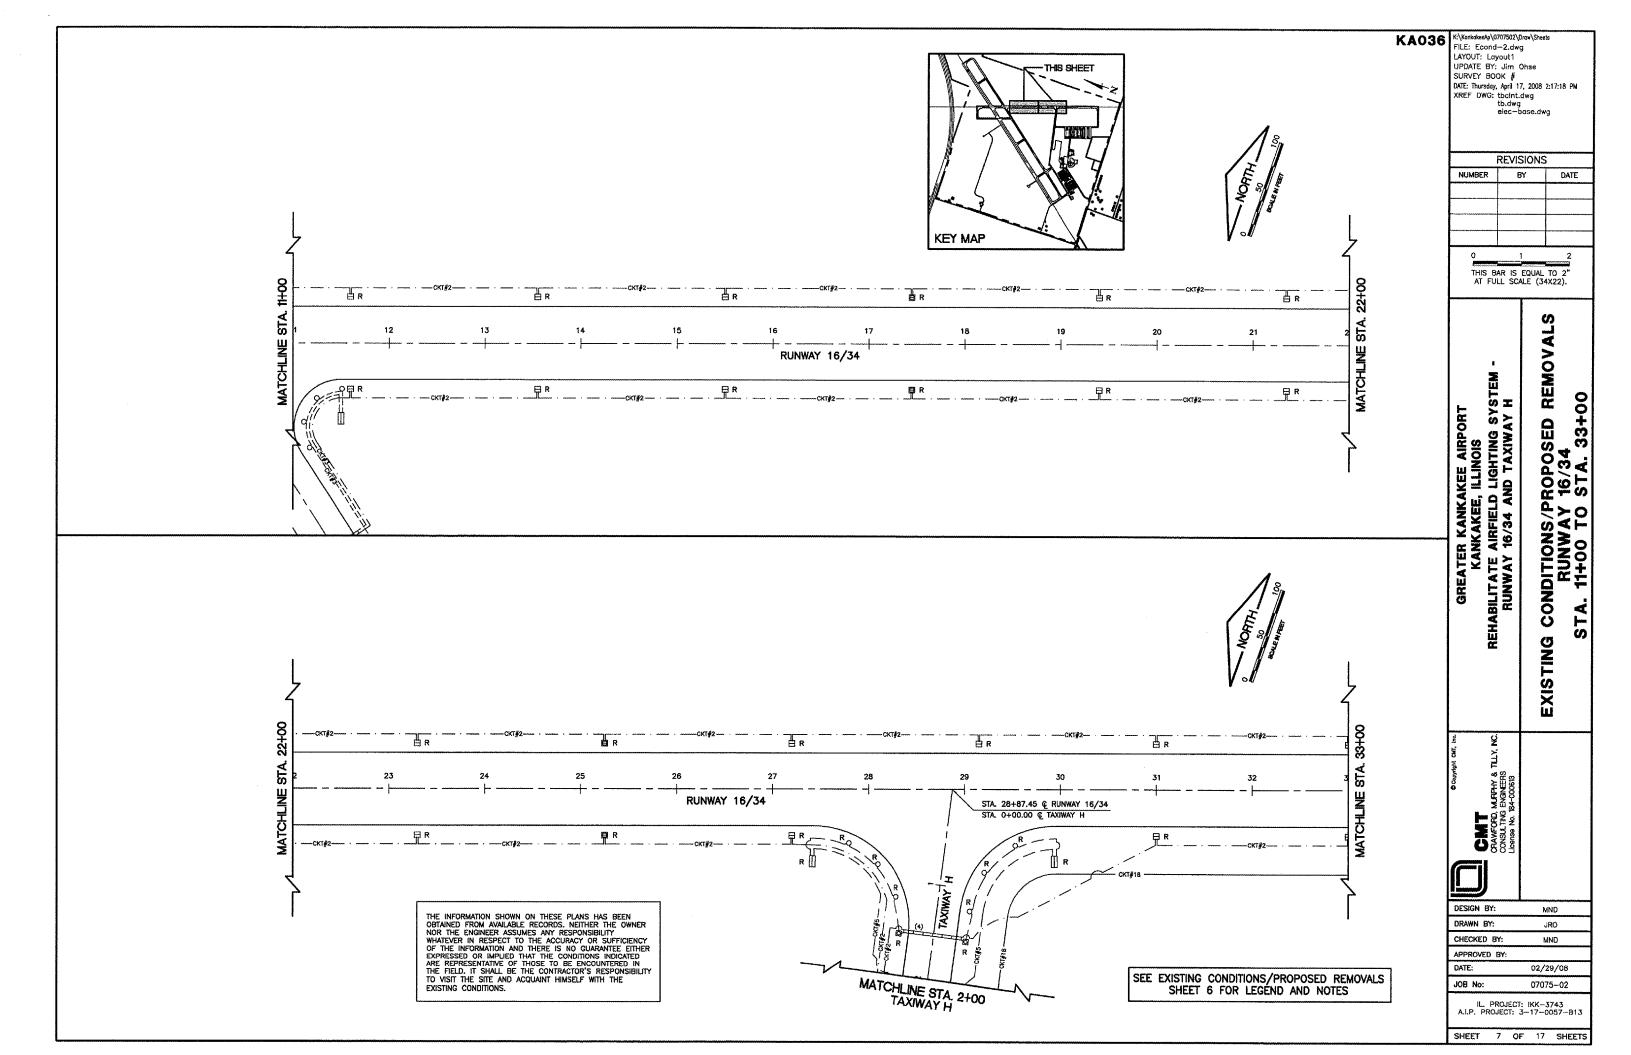


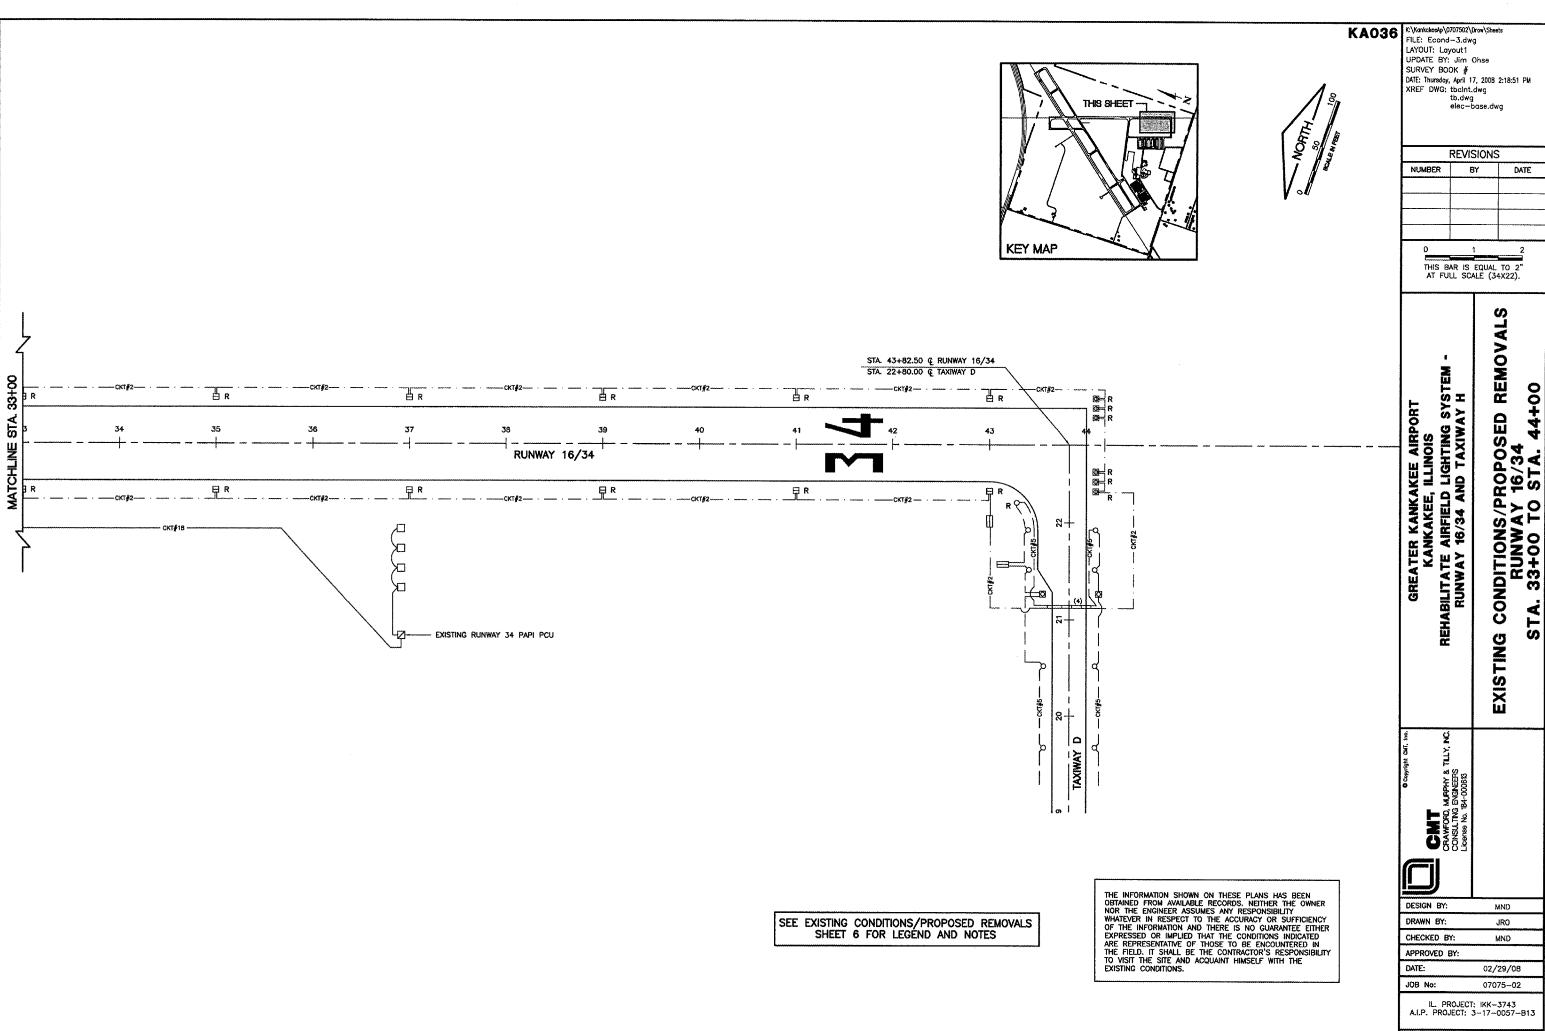



DATE

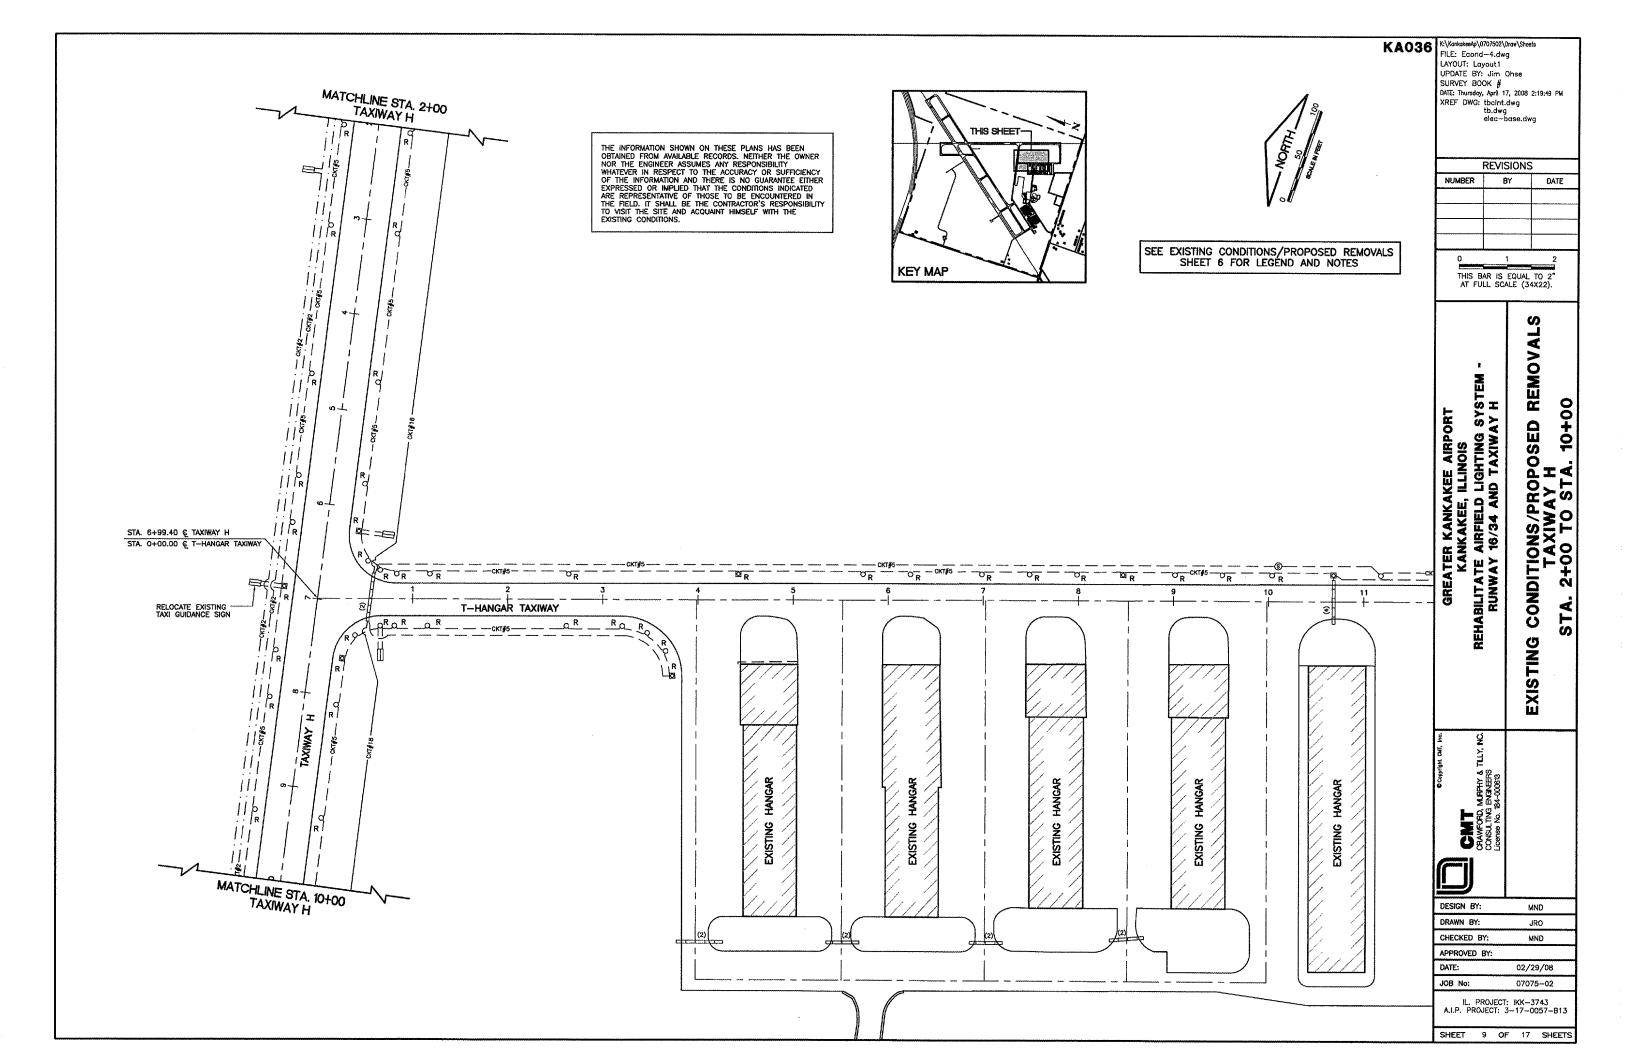


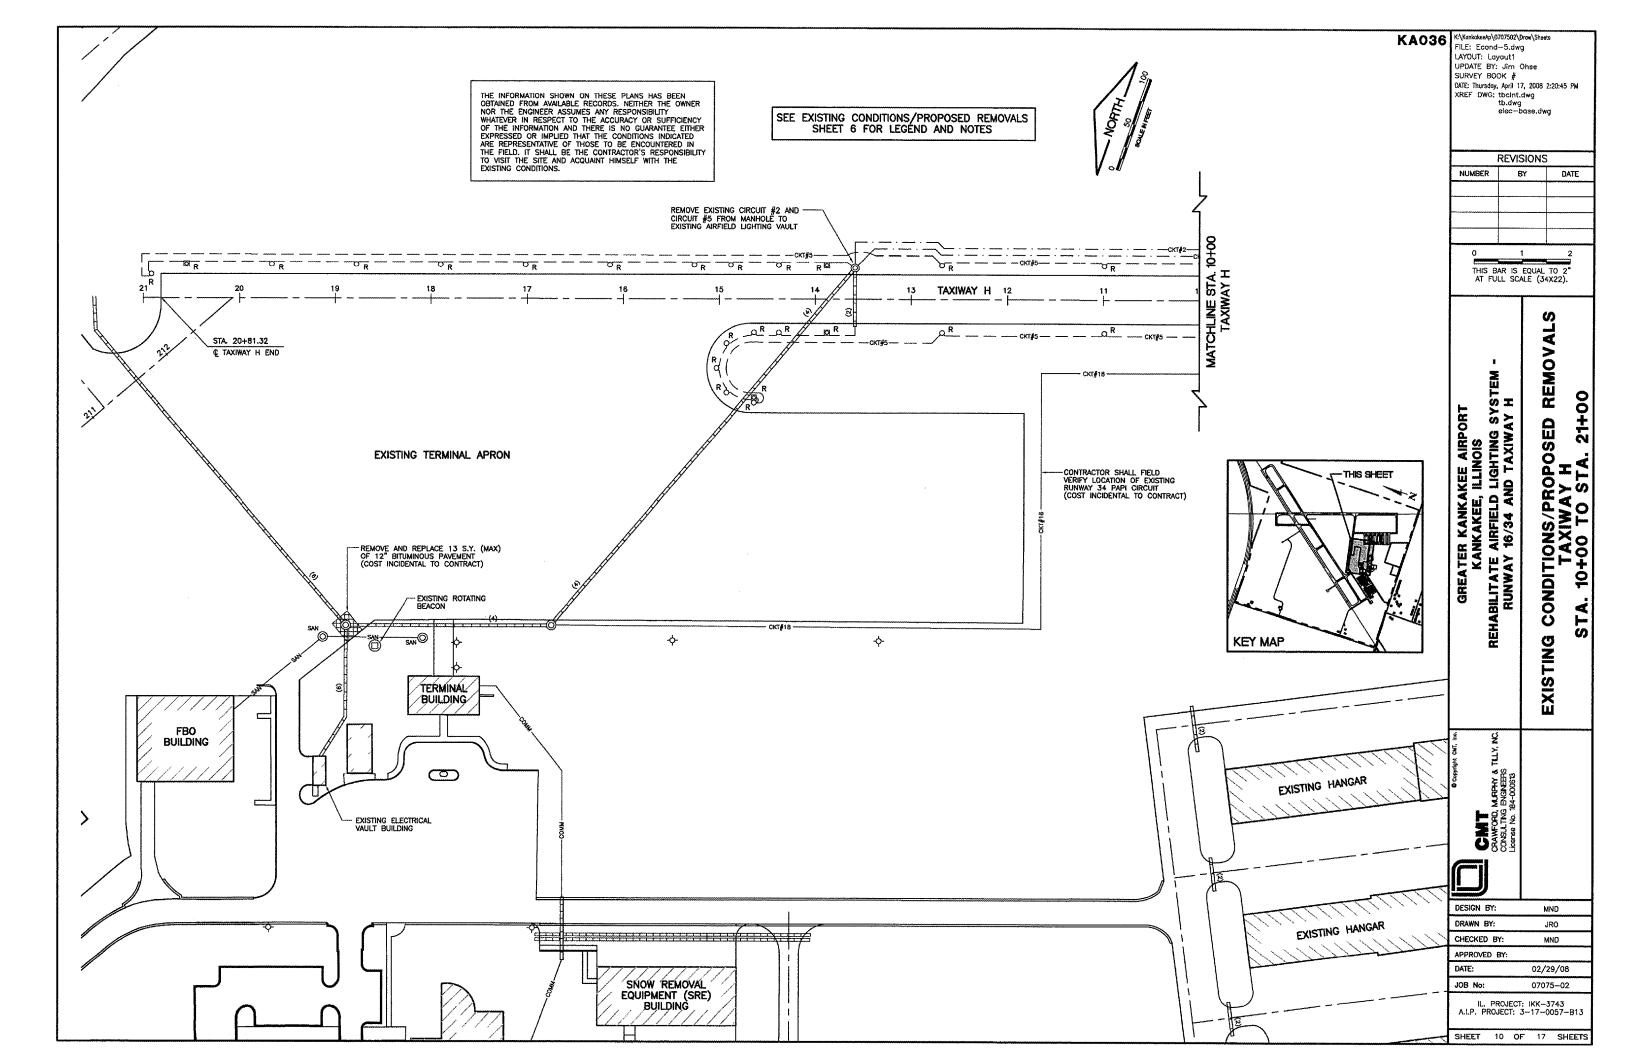

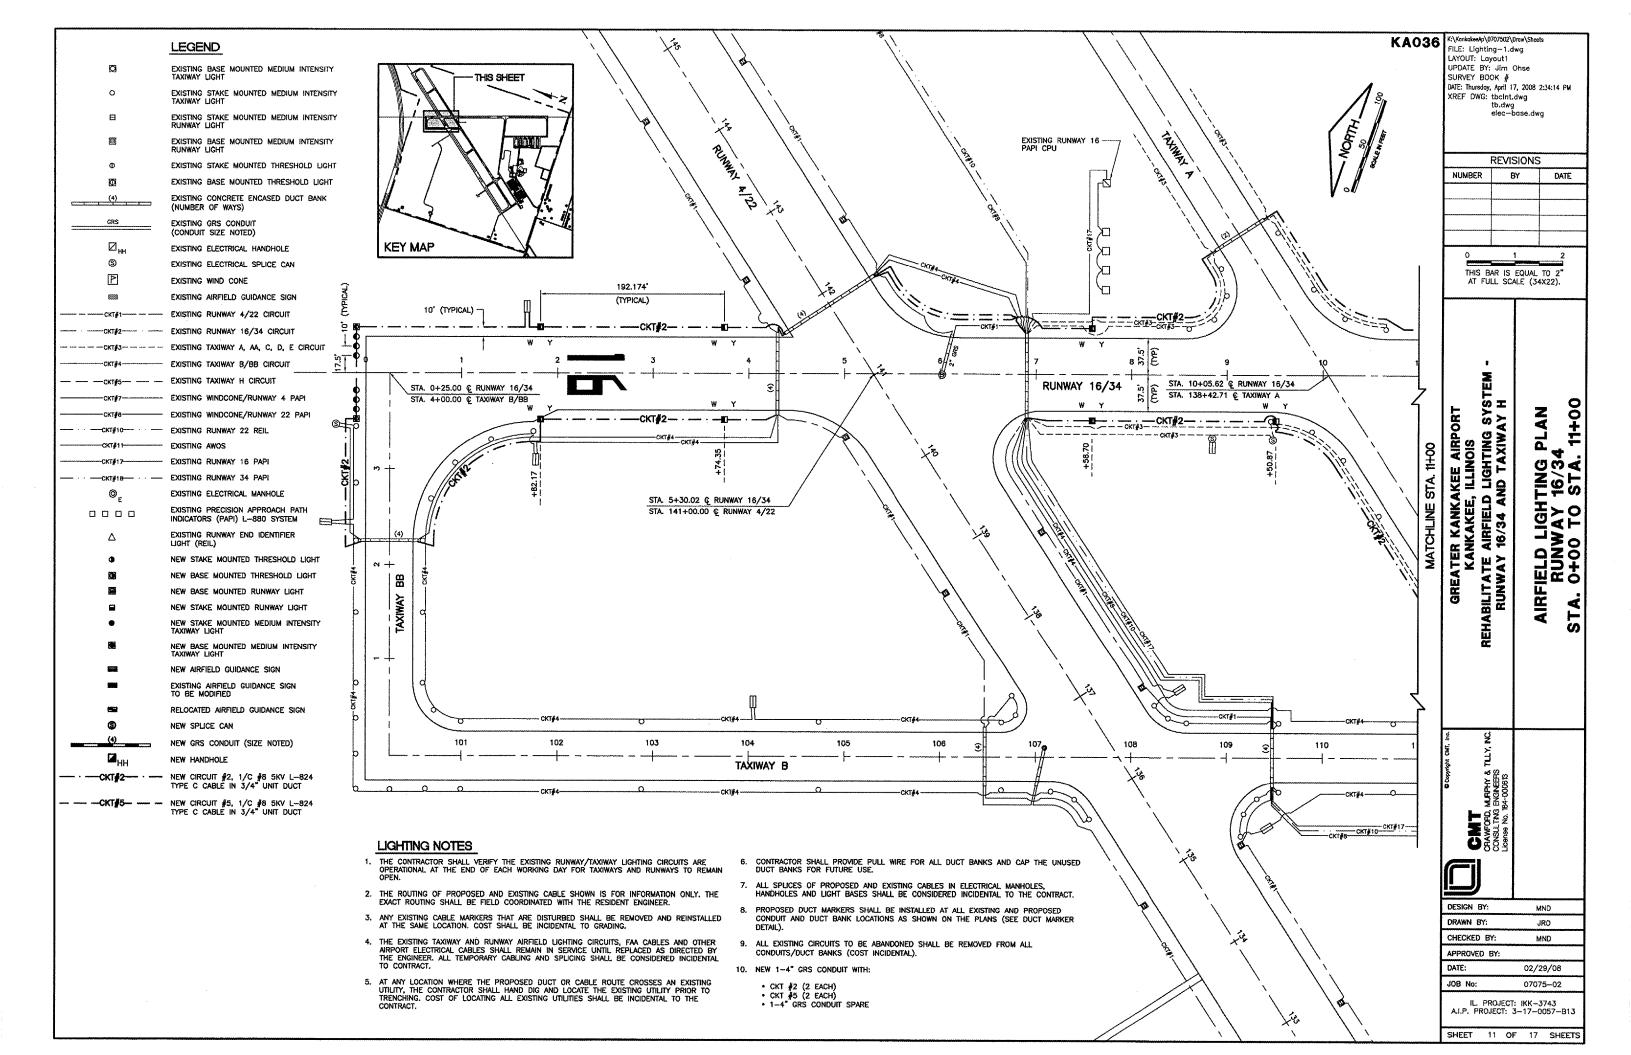

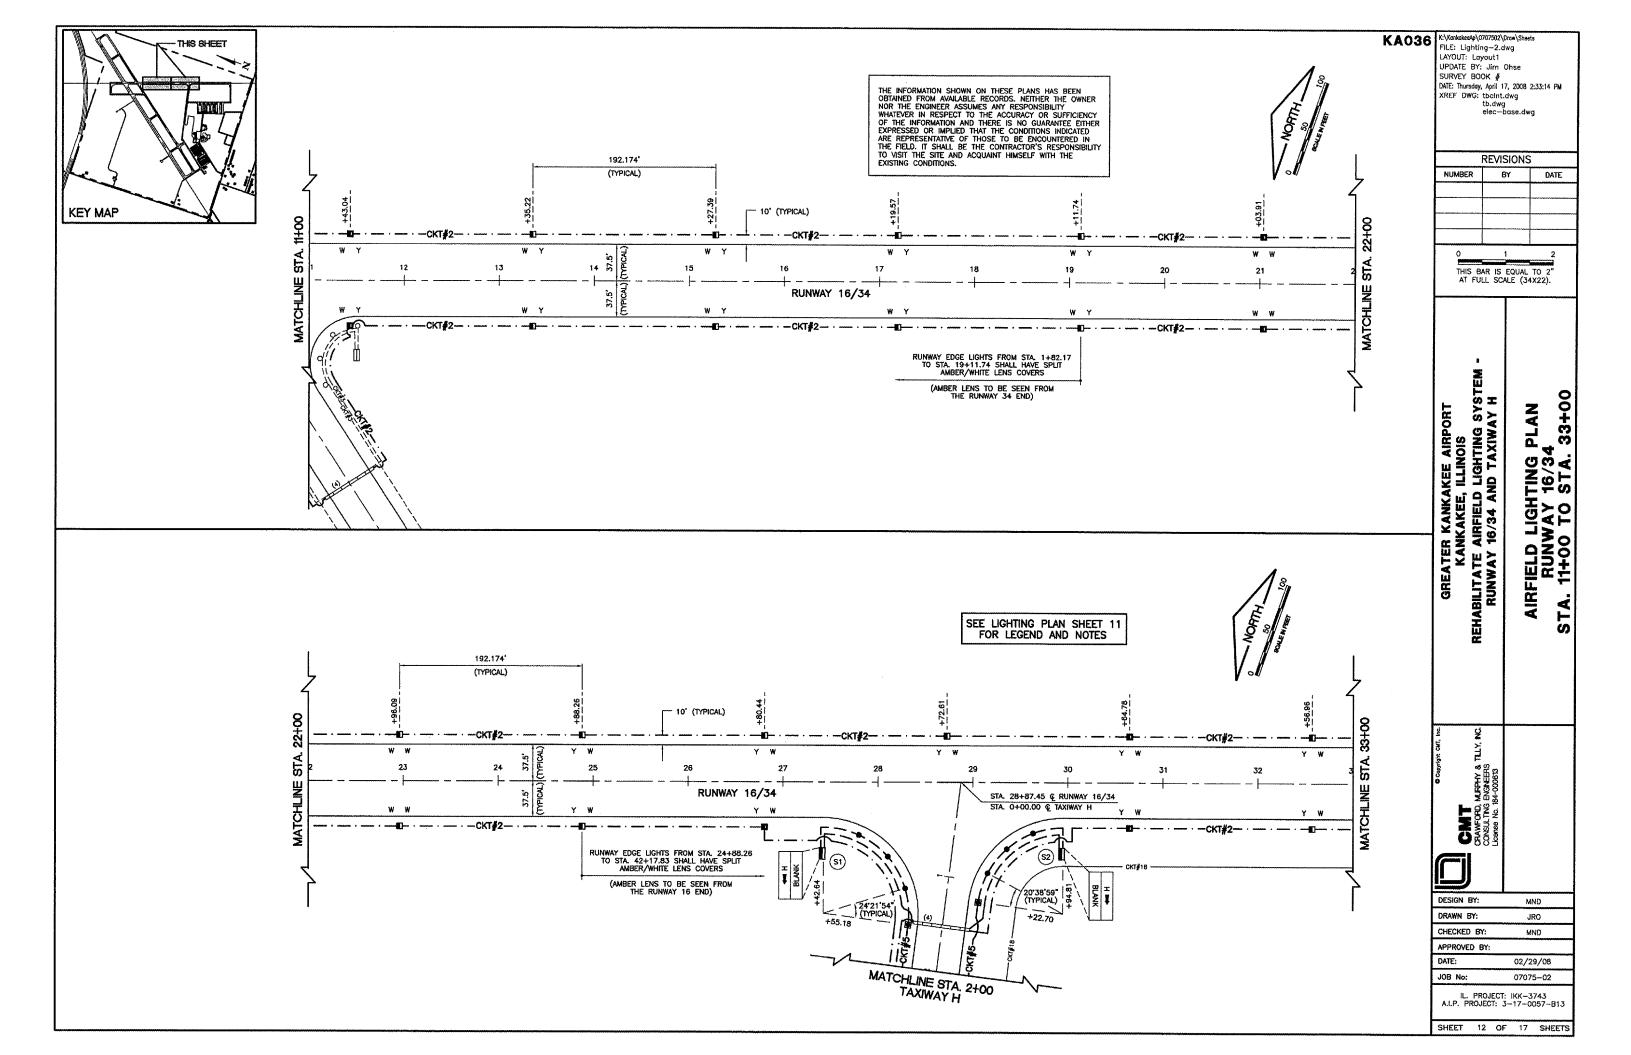





SEE LIGHTING PLAN SHEET 11 FOR LEGEND AND NOTES

THIS BAR IS EQUAL TO 2" AT FULL SCALE (34X22).

REVISIONS

DATE

NUMBER

UPDATE BY: Jim Ohse SURVEY BOOK #

DATE: Thursday, April 17, 2008 2:32:17 PM XREF DWG: tbclnt.dwg tb.dwg elec-base.dwg

GREATER KANKAKEE AIRPORT KANKAKEE, ILLINOIS REHABILITATE AIRFIELD LIGHTING SYSTEM RUNWAY 16/34 AND TAXIWAY H AIRFIELD LIGHTING RUNWAY 16/3 TA. 33+00 TO STA

CRAWFORD, CONSULTING License No. 18

DESIGN BY:	MND
DRAWN BY:	JRO
CHECKED BY:	MND
APPROVED BY:	
DATE:	02/29/08
JOB No:	0707502

IL. PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13

SHEET 13 OF 17 SHEETS

		92.174' YPICAL)	&L)	25.65	STA. 43+82.50 € RUN STA. 22+80.00 € TAXI	NWAY 16/34 IWAY D	
33+00	· · · · i · · ·	жт∦2	··	#2-·-··································			(TYPICAL)
ا م م	Y W	Y W	Y W	Y W	Y W	\$	(III Iona)
STA.	34 35	36 37	38 39	40 4	42	43 40 17.5	
	1	1	RUNWAY 16/34				
MATCHLINE	Y W	Y W	Y W	Y W	Y W		
MA	CKT#18 ————————————————————————————————————		XISTING RUNWAY 34 PAPI PCU	2		S6 S8 NAME OF SELECTION OF SELE	
						AY D + Artis	

AIRFIELD SIGNAGE SCHEDULE

SIGN

TYPE

3

0 3

0 2,3

3 2,3

2 2,1

PROPOSED PROPOSED PROPOSED

FACE

NUMBER

S2

S3

54

S5

S6

\$7

SIGN

LEGEND

◆■ H

BLANK BIYUK

om H BLANK

← APRON G

н э⇒

BLANK

BIYMK

н с⇒

B1 ==>

BLANK

34

PROPOSED SIGN

LOCATION

STA. 27+43, 57.5' RT. CENTERLINE RUNWAY 16/34

STA 29+95, 57.5' RT. CENTERLINE RUNWAY 16/34

STA 0+67, 52.5' RT. CENTERLINE TAXIWAY D

STA 6+23, 60° LT. CENTERLINE TAXIWAY H

STA 6+91, 60' RT. CENTERUNE TAXIWAY H

STA 43+00, 72.5' RT. CENTERLINE RUNWAY 16/34

STA 21+54, 62.5' LT. CENTERLINE TAXIWAY D

EXISTING

SIGN

LEGEND

BLANK

D -APRON

H G⇒

34 me **★** NOЯЧA

H D⇒

← 0

BLANK

D 34

COMMENTS

PROPOSED TAXI GUIDANCE SIGN - 2 CHARACTER

PROPOSED TAXI GUIDANCE SIGN - 2 CHARACTER


MODIFY EXISTING SIGN PANEL


SIGNAGE NOTES:


PROPOSED SIGN TYPE LEGEND

BLANK PANEL -- BLACK
 The Runway-taxiway holdline -- White Legend on Red Background
 Short -- Yellow Legend on Black Background
 Direction Sign -- Black Legend on Yellow Background


- PROPOSED GUIDANCE SIGNS PANEL SIZE WILL BE BASED ON THE MANUFACTURERS RECOMMENDATION.
- NEW GUIDANCE SIGN PANEL SIZES WILL BE BASED ON THE MANUFACTURER'S RECOMMENDATION.
- EXISTING SIGN PANELS TO BE REPLACED/MODIFIED SHALL BE VERIFIED BY THE CONTRACTOR THAT THEY ARE COMPATIBLE WITH THE EXISTING SIGN ASSEMBLIES.
- 4. THE FOLLOWING TAXIWAY DESIGNATIONS WILL BE CHANGED UNDER THIS PROJECT:
- TAXIWAY D (AT THE RUNWAY 34 END) WILL BE REDESIGNATED AS TAXIWAY B1.
- T-HANGAR TAXIWAY WILL BE REDESIGNATED AS TAXIWAY G.

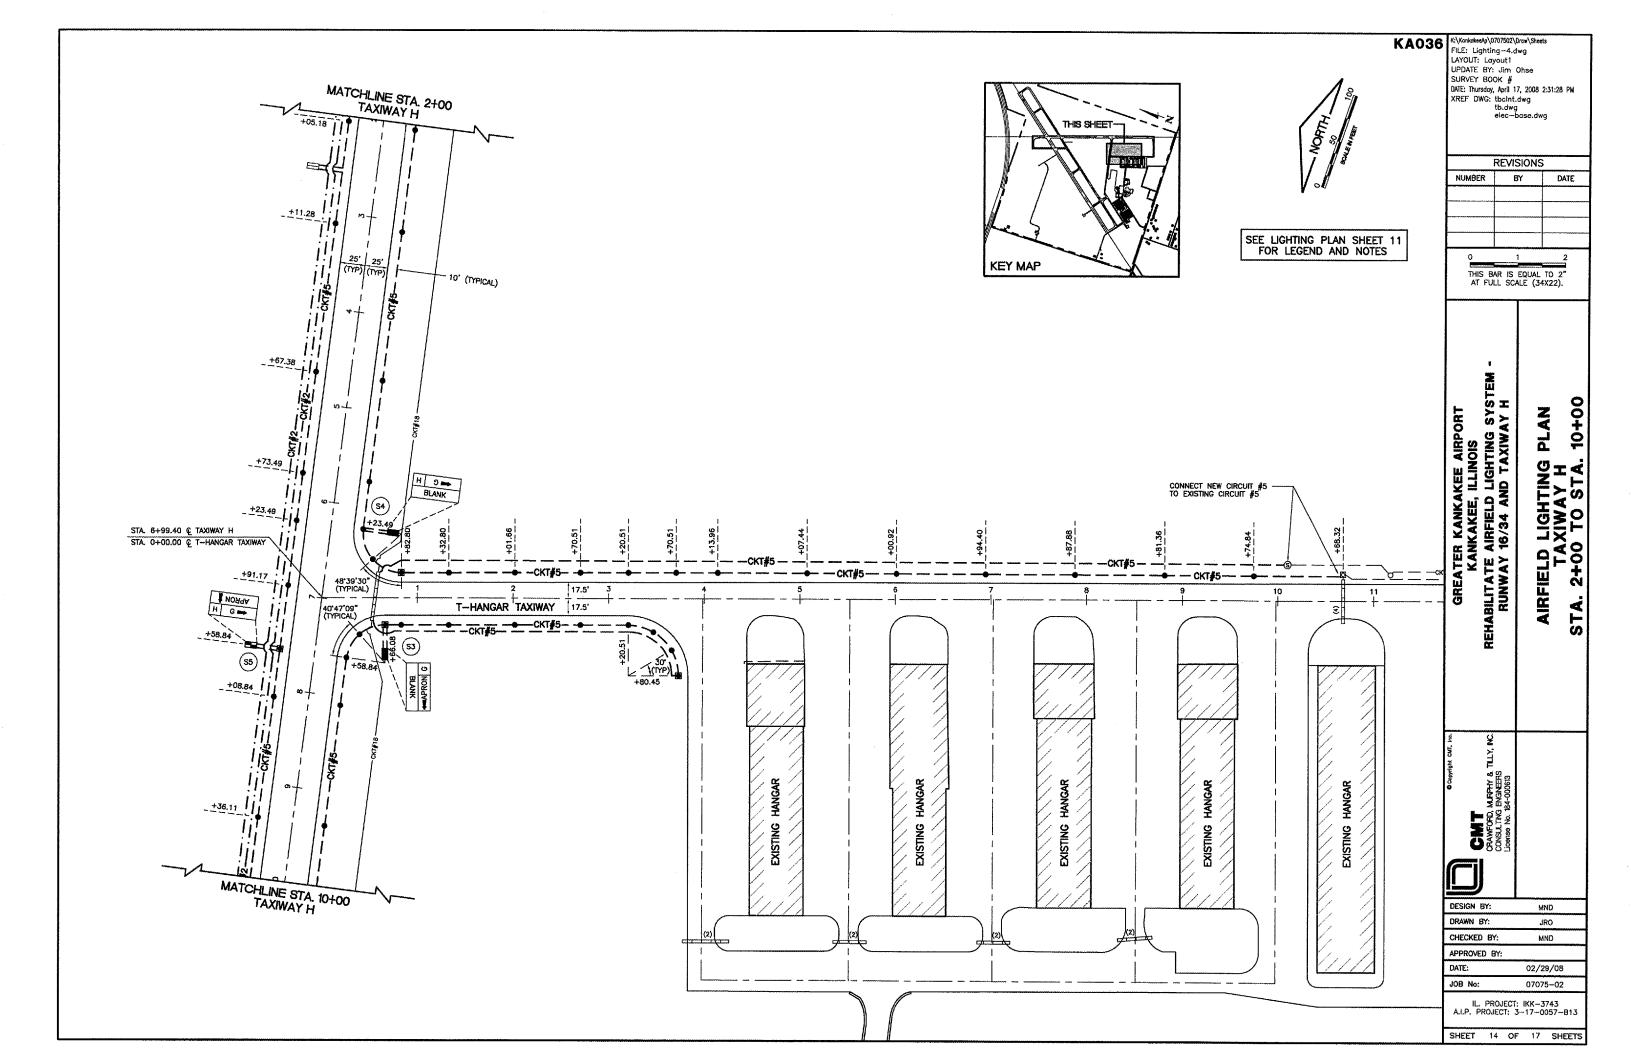

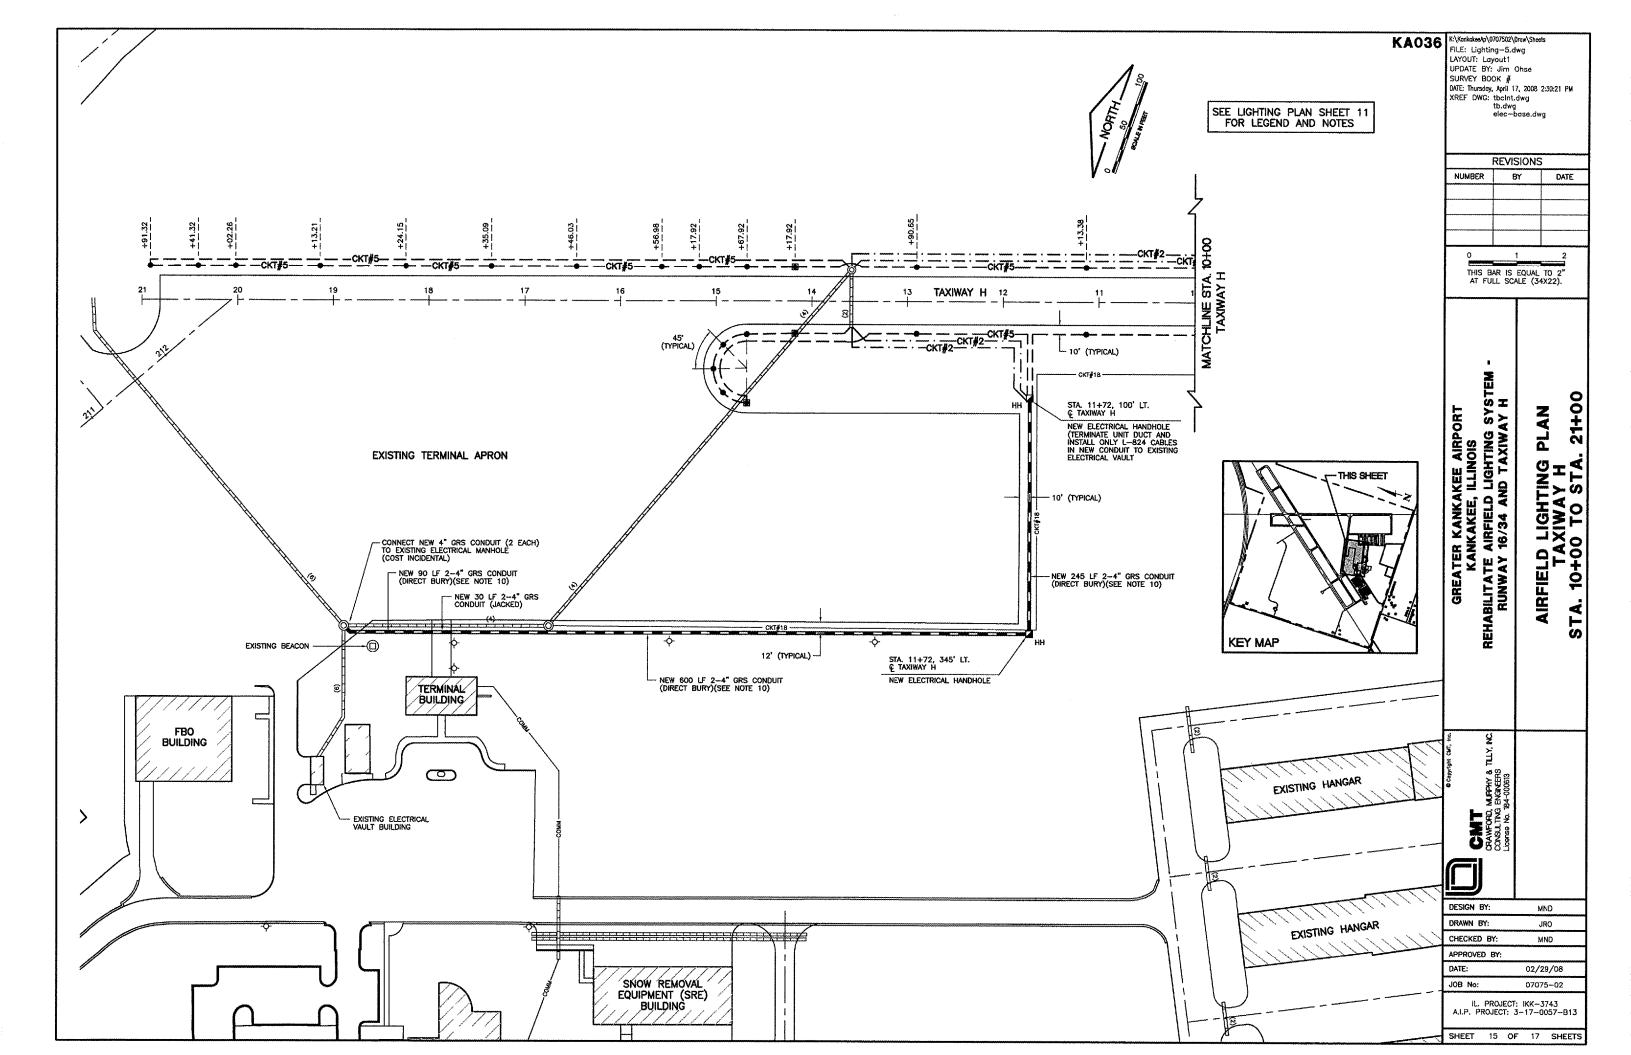

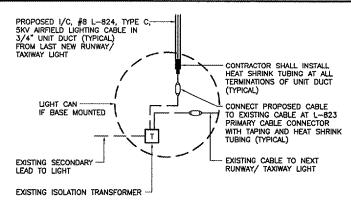


RUNWAY/TAXIWAY LIGHTING CIRCUIT CONNECTION DETAIL




TYPE A - CABLE SPLICE

FOR SPLICES IN HOMERUNS AND FOR EXTENSIONS TO EXISTING CABLES ONLY N.T.S.



TYPE B - CABLE SPLICE

FOR SPLICES FOR USE AT JUNCTION OF HOMERUN WITH LOOP CIRCUIT

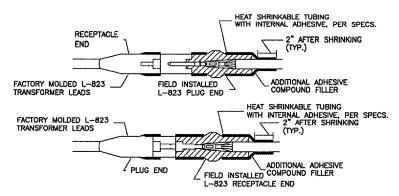


TYPE C AND D - CABLE SPLICE

FOR SPLICES AT RUNWAY/TAXIWAY LIGHTS AND SIGNS

CABLE SPLICE NOTES

- 1. INSIDE DIAMETER OF CONNECTOR SHALL PROPERLY MATCH THE OUTSIDE DIAMETER OF CABLE.
- WRAP WITH AT LEAST ONE LAYER OF RUBBER OR SYNTHETIC RUBBER TAPE AND ONE LAYER OF PLASTIC TAPE, ONE-HALF LAPPED, EXTENDING AT LEAST 1-1/2 INCHES ON EACH SIDE OF JOINT.
- THE COST OF FURNISHING AND INSTALLING ALL SPLICE MATERIALS SHALL BE INCIDENTAL TO THE ASSOCIATED CABLE ITEMS.
- 4. THE CONTRACTOR SHALL HAVE A MINIMUM OF FIVE (5) TYPE A SPLICE KITS ON THE JOB SITE AT ALL TIMES FOR EMERGENCY REPAIRS.




TURF AREA CABLE TRENCH DETAIL

NOT TO SCALE

NOTES

- 1. TRENCHES WITH MORE THAN 2 CABLES SHALL BE INCREASED 4" IN WIDTH FOR EACH ADDITIONAL CABLE. IF SPECIFIED ON PLANS, TWO PARALLEL TRENCHES HAVE BE CONCENTRED.
- 2. DEPTH OF TRENCHES SHALL BE AS SHOWN UNLESS OTHERWISE SPECIFIED ON THE PLANS.
- SAND BACKFILL SHALL BE USED IF THE EXISTING SOIL DOES NOT MEET THE BACKFILL REQUIREMENTS.
- 4. ALL DISTURBED SURFACES SHALL BE RESTORED TO THEIR ORIGINAL CONDITION. COST IS INCIDENTAL.

AT CONTRACTOR'S OPTION, CABLE PLOWING MAY BE USED IN LIEU OF TRENCHING.




NOTES

- 1.) CABLE MARKERS SHALL BE INSTALLED AT ALL BENDS AND EVERY 200' ALONG THE CABLE RUN.
- 2.) ITEM 610 CONCRETE SHALL BE USED.
- ALL EXPOSED EDGES SHALL BE EDGED WITH A 1/4" RADIUS TOOL.
- 4.) THE COST OF FURNISHING AND INSTALLING NEW MARKERS SHALL BE INCIDENTAL TO THE ASSOCIATED CABLE ITEMS.
- 5.) 0.049 CU. YD. CONCRETE PER MARKER.
- 6.) CONTRACTOR SHALL LOCATE EXISTING CABLE MARKERS IN THE FIELD BEFORE WORK BEGINS IN ORDER TO RELOCATE CABLE MARKERS AT CORRECT LOCATIONS (COST INCIDENTAL TO CONTRACT).

GENERAL NOTES:


- THE CONCRETE BASE FOR BASE MOUNTED LIGHTS SHALL BE TROWEL FINISHED WITH A 45' BEVELED EDGE. SLOPE TO DRAIN (610).
- 2. TRANSFORMER HOLDER SHALL BE ANY COMMERCIALLY AVAILABLE BRICK
- 3. BREAKING GROOVE COUPLINGS SHALL NOT BE OVER 1" ABOVE GROUND LINE
- 4. ISOLATION TRANSFORMERS COME WITH A FACTORY INSTALLED PLUG (TYPE 1, CLASS A, STYLE 2) AND RECEPTACLE (TYPE 1, CLASS A, STYLE 9). A TYPE 1, CLASS B, STYLE 3 PLUG AND TYPE 1, CLASS B, STYLE 10 RECEPTACLE SHALL BE INSTALLED ON THE 1/c, No. 8, 5000 V., L-824 TYPE C CABLES FOR CONNECTION TO EACH TRANSFORMER.
- 5. TO FURTHER REDUCE THE POSSIBILITY OF WATER/MOISTURE ENTRANCE INTO THE CONNECTOR BETWEEN THE CABLE AND THE FIELD ATTACHED CONNECTOR, IT IS REQUIRED THAT A HEAT SHRINKABLE TUBING WITH INTERNAL ADHESIVE BE APPLIED OVER THE ENTIRE CABLE
- 6. ALL SIGNS, LIGHTS, CABLES AND TRANSFORMERS TO BE REMOVED SHALL REMAIN THE PROPERTY OF THE AIRPORT. AT THE DISCRETION OF THE AIRPORT MANAGER, THE CONTRACTOR MAY BE REQUIRED TO DISPOSE OF THESE MATERIALS OFFSITE AT NO ADDITIONAL COST.
- 7. TAXIWAY LIGHTS SHALL HAVE A BLUE LENS, RUNWAY LIGHTS SHALL HAVE A CLEAR OR 180° AMBER/CLEAR LENS AS DESIGNATED ON PLANS.
- 8. DUCT MARKERS SHALL BE INSTALLED AT EVERY NEW DUCT AND AT EVERY EXISTING DUCT USED FOR THIS PROJECT.
- CONTRACTOR SHALL HAVE THE OPTION TO TRENCH OR PLOW UNIT DUCT, NO ADDITIONAL PAYMENT SHALL BE MADE FOR TRENCHING.
- 10. INSTALL 1/C #6 AWG BARE COPPER GROUND JUMPER CONNECTED TO GROUND LUG INSIDE BASE CAN OR STAKE AND EXOTHERMICALLY WELDED TO GROUND ROD. INSTALL GROUND LUG FOR EXISTING CANS AND STAKES, IF REQUIRED. INSTALLING GROUND LUGS FOR EXISTING CANS AND STAKES SHALL BE AT NO ADDITIONAL COST.



CABLE IN UNIT DUCT - PLOWED

NOT TO SCALE

NOTE: CONTRACTOR SHALL HAVE THE OPTION TO TRENCH OR PLOW UNIT DUCT. NO ADDITIONAL PAYMENT SHALL BE MADE FOR TRENCHING.

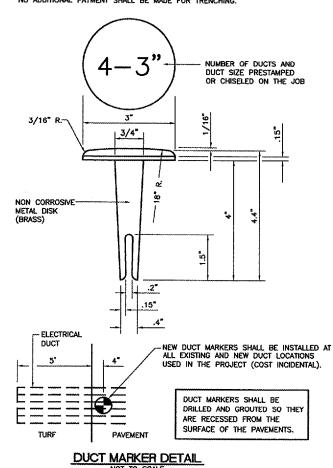


NOT TO SCALE


KA036 FILE: Elecdti-1.dwg LAYOUT: Layout1 UPDATE BY: Jim Ohse SURVEY BOOK # DATE: Thursdoy, April 17, 2008 2:24:58 PM XREF DWG: tbcInt.dwg tb.dwg REVISIONS NUMBER BY DATE

THIS BAR IS EQUAL TO 2" AT FULL SCALE (34X22).

REATER KANKAKEE AIRPORT KANKAKEE, ILLINOIS ITATE AIRFIELD LIGHTING SYSTE S S ABILITATE , RUNWAY CTRIC/ إينا **3** DESIGN BY MND JRO CHECKED BY MND 02/29/08 07075-02 IL. PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13


SHEET 16 OF 17 SHEETS

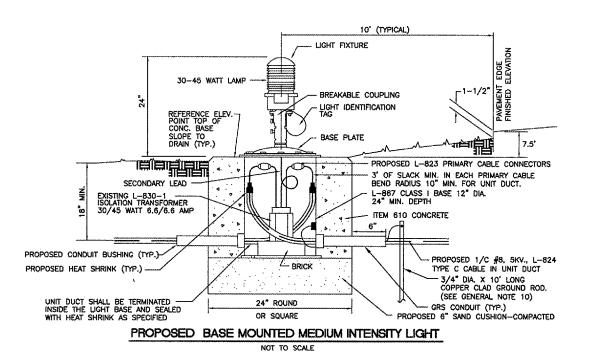


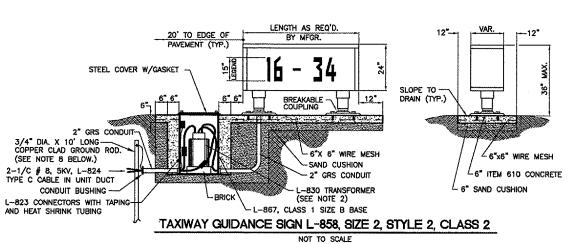

SIGNAGE NOTES

- ALL SIGNS ARE LUMACURVE 2-SIDED SIGNS BY STANDARD SIGNS OR APPROVED EQUAL.
- 2. TRANSFORMER WATTAGE AS RECOMMENDED BY MANUFACTURER.
- 3. LIGHTED SIGNS SHALL BE BASE MOUNTED ONLY.
- 4. UNIT DUCT SHALL BE TERMINATED IN THE CAN AND SEALED TO THE CABLE WITH HEAT SHRINK AS SPECIFIED.
- 5. THE NUMBER OF MODULES PER SIGN SHALL BE AS RECOMMENDED BY THE MANUFACTURER.
- 6. CONTRACTOR SHALL SUBMIT DETAILED SHOP DRAWING INCLUDING SIGN, COLOR, SIZE AND PROPOSED LEGEND, IN ENOUGH DETAIL AND DETERMINE PROPOSED SPACING AND OTHER INFORMATION REQUIRED BY SPECIAL PROVISIONS. CONTRACTOR TO VERIFY PROPOSED SIGN LOCATIONS AND ORIENTATIONS WITH RESIDENT ENGINEER PRIOR TO INSTALLATION.
- INSTALL 1/C #6 AWG BARE COPPER GROUND JUMPER CONNECTED TO GROUND LUG INSIDE BASE CAN AND EXOTHERMICALLY WELDED TO GROUND ROD. INSTALL GROUND LUG FOR EXISTING CANS, IF REQUIRED.

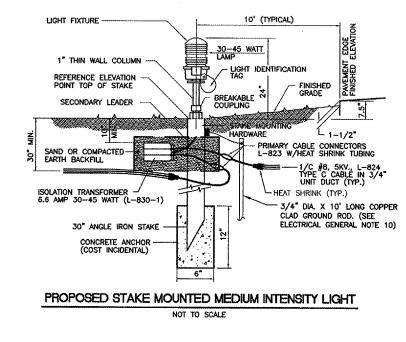




LIGHT IDENTIFICATION DETAIL

NOTES:

- INSTALL A NONCORROSIVE DISC OF 2" MINIMUM DIAMETER WITH THE NUMBER PERMANENTLY STAMPED, CUT OUT, OR ENGRAVED UNDER THE HEAD OF THE BASE PLATE BOLT OR ATTACHED TO LIGHT FLANGE WITH A SET SCREW.
- NUMERALS SHOWN ARE FOR ILLUSTRATIVE PURPOSES ONLY, ALL EXISTING AND PROPOSED TAXIMAY AND RUNWAY LIGHTS SHALL BE TAGGED AS DIRECTED BY THE RESIDENT ENGINEER. ALL LIGHTS ON EXISTING CIRCUITS THAT HAVE LIGHTING IMPROVEMENTS (PROPOSED OR RELOCATED LIGHTS) SHALL BE RETAGGED.
- 3. COST OF TAGGING LIGHTS SHALL NOT BE PAID FOR SEPERATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.

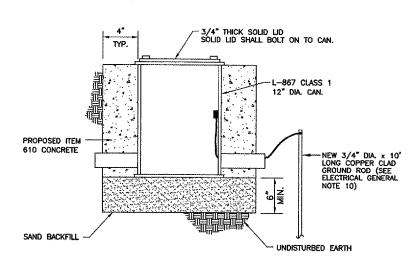

EXISTING SPLICE CAN DETAIL NOT TO SCALE

KA036 K:\KankakeeAp\0707502\Draw\Sheet FILE: Elecdtl~2.dwg LAYOUT: Lavout1 UPDATE BY: Jim Ohse SURVEY BOOK # DATE: Thursday, April 17, 2008 2:25:44 PM XREF DWG: tbcInt.dwg REVISIONS NUMBER BY DATE THIS BAR IS EQUAL TO 2 AT FULL SCALE (34X22). ER KANKAKEE AIRPORT ANKAKEE, ILLINOIS E AIRFIELD LIGHTING SYSTEM -Y 16/34 AND TAXIWAY H S S ш GREATER KANK REHABILITATE A TRIC Ö Ū MURPHY & ENGINEERS CAMPORD, CONSULTING DESIGN BY: MND DRAWN BY JRO CHECKED BY: MND APPROVED BY: DATE: 02/29/08 JOB No: 07075-02 IL. PROJECT: IKK-3743 A.I.P. PROJECT: 3-17-0057-B13

SHEET 17 OF 17 SHEETS