TABLE 1

(Ablaha !				
PAVEMENT THICKNESS T - INCHES	DEPTH OF CONTRACTION JOINT INITIAL SAW CUT I, INCHES I=(T/4) ±1/4"			
5	1.25*			
6	1.50"			
7	1.75"			
8	2.00*			
9	2.25"			
10	2.50"			
11	2.75"			
12	3.00"			
13	3.25"			
14	3,50"			
15	3.75*			
16	4.00"			
17	4.25"			
18	4,50"			


TABLE 2


PAVEMENT	DOWEL BAR DETAILS			TIE BAR DETAILS		
THICKNESS T ~ INCHES	DIA.	LENGTH	SPACING	BAR SIZE	LENGTH	SPACING
5	5/8"	12"	12"	#4	24"	30"
6	3/4"	18"	12"	#5	30"	30"
7	3/4"	18"	12"	#5	30*	30"
8	1"	19"	12"	#5	30*	30*
9	1*	19*	12"	# 5	30"	30"
10	1"	19"	12"	#5	30"	30"
11	1"	19"	12"	#5	30"	30"
12	1"	19"	12"	#5	30"	30"
13	1 1/4"	20"	15"	#5	30"	30"
14	1 ~ 1/4"	20"	15"	#5	30"	30"
15	1 - 1/4"	20"	15"	# 5	30"	30°
16	1 ~ 1/4"	20"	15"	#5	30"	30"
17	1 - 1/2"	20"	18"	#5	30"	30"
18	1 - 1/2"	20"	18"	#5	30"	30"


JOINT NOTES

- ALL EDGES OF NEW SLABS, FREE STANDING OR CLOSURE, SHALL BE EDGED WITH AN APPROVED TOOL HAVING A RADIUS OF 1/8" TO 1/4" TO FACILITATE SAWING OF THE SEALANT RESERVOIR. A RADIUS > 1/4" WILL NOT BE ACCEPTABLE.
- THE INITIAL SAWCUT FOR ALL LONGITUDINAL & TRANSVERSE CONTRACTION JOINTS SHALL BE SAWED AS SOON AS POSSIBLE AFTER PLACEMENT OF THE PAYFMENT.
- ALL TIE BARS & MESH SHALL BE SECURELY HELD IN PLACE BY SUPPORT PINS OR OTHER APPROVED METHODS TO PREVENT SHIFTING DURING & AFTER CONCRETE PLACEMENT.
- 4.) TIE BARS SHALL BE DEFORMED BARS IN CONFORMANCE WITH THE SPECIFICATIONS.
- 5.) THE INITIAL SAWCUT SHALL BE MADE TO THE 1/8" WIDTH INDICATED. INITIAL SAWING TO THE DIMENSIONS OF THE SECOND SAWCUT WILL NOT BE
- 6.) ALL SEALANT TO BE HOT/COLD POUR. SILICONE AND PREFORMED SEALANT SHALL NOT BE USED ON
- 7.) ALL JOINTS THAT ARE THE END OF A CONSTRUCTION PHASE TO BE TYPE D DOWELED CONSTRUCTION JOINTS.

CONTRACTION JOINTS

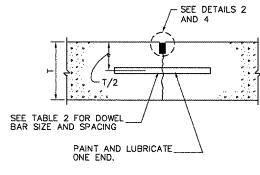





TYPE F DOWELED

SYMBOL -x-x-x-

TYPE H DUMMY

EXPANSION JOINTS

TYPE G HINGED (TIED)

SYMBOL -----|----

FILE: JOINTDET.dwg UPDATE BY: Sean Smith PLOT DATE: 4/17/2008 7:55 PM

K:\ChampaignAp\030590302 Apron Rehab 2\Draw\;

REVISIONS						
NUMBER	BER BY DATE					

THIS BAR IS EQUAL TO 2" AT FULL SCALE (34X22).

PHASE

REHABILITATE AIR CARRIER RAMP,

OF ILLINOIS
AIRPORT


UNIVERSITY (

DETAIL


JOINTING


NEW

CONSTRUCTION JOINTS

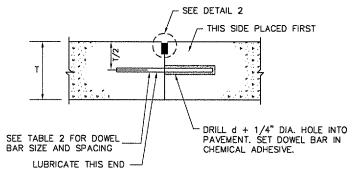






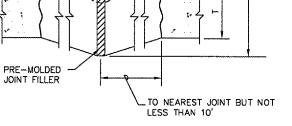



TYPE B THICKENED EDGE

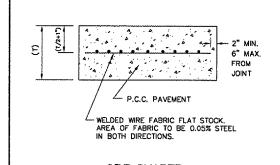



ODD SHAPED
PANEL REINFORCEMENT

JOINT SEALING DETAILS

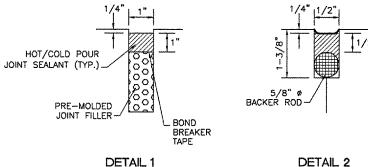







DETAIL 4 *SEE TABLE 1



CMI

JOB No: 0305903 CMI-3563 3-17-0016-XX

SHEET 30 OF 57 SHEETS