

FILE NAME =

USER NAME = leroyma

RESURFACED PCC PAVEMENT

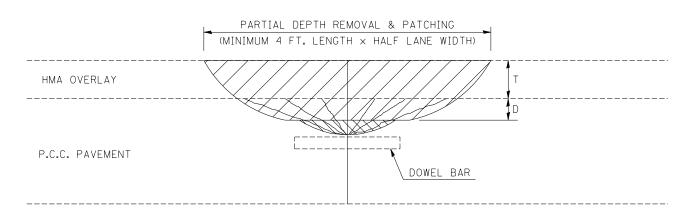

BARE PCC PAVEMENT

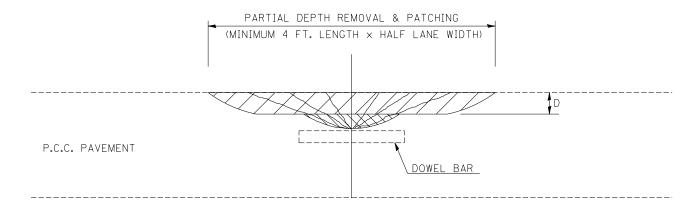

DESIGNED -



= PARTIAL DEPTH REMOVAL (X4401705)

MILL MACHINE AND/OR WHEEL SAW REMOVAL

AIR EQUIPMENT OR MECHANICAL SWEEPER REMOVAL OF LOOSE AND/OR UNSOUND CONCRETE

DESIGN NOTES

PARTIAL DEPTH HMA PATCHING SHALL NOT BE USED WHEN HMA OVERLAY THICKNESS (T) ON PCC PAVEMENT EXCEEDS 4 3/4 INCHES (121 mm) OR ON CRC PAVEMENT.

GENERAL NOTES

ALL VOLUME OF PARTIAL DEPTH REMOVAL SHALL BE REPLACED WITH HOT-MIX ASPHALT (HMA) AND PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR PARTIAL DEPTH PATCHING.

T = THICKNESS OF HMA OVERLAY(S). SEE EXISTING TYPICAL CROSS SECTION.

GENERAL NOTE 406H SHALL INCLUDE MIXTURE REQUIREMENTS FOR PARTIAL DEPTH PATCHING.

HMA REPLACEMENT IN RESURFACED PCC PAVEMENT LOCATIONS SHALL BE ACCORDING TO SECTION 406 OF THE STANDARD SPECIFICATIONS.

D = DEPTH OF PARTIAL DEPTH REMOVAL INTO EXISTING PCC PAVEMENT. (3" (75 mm) ± OR TO SOUND CONCRETE)

TRANSVERSE CONTRACTION JOINT SHOWN - OTHER LOCATIONS SIMILAR.

> Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DICTRI	CT	E	DETA	111	MO	XX442100
nigini	6	3	DEIA	ML	NU.	AA4421UU

pw_work\pwidot\leroyma\d0175388\d9500	698.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS	PC
	PLOT SCALE = 40.0251 ' / IN.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	
	PLOT DATE = 3/8/2010	DATE -	REVISED -		SCALE.

REVISED - 11/06

F	CC	PARTIAL	DEPTH	HOT-MIX	ASPHALT	PATCHING	
		SUFEE NO		CHEETC	671		

F.A. RTE.	A. SECTION					COUNTY	TOTAL SHEETS	SHE	
812	812 (25,24)RS-1					PIATT	28	2	
							CONTRACT	NO.90	915
					666				