
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING DECK BEAM

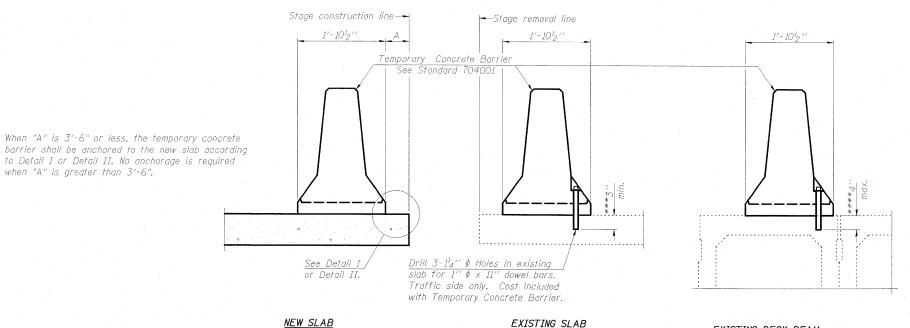

NOTES

Detail I - With Bar Splicer or Couplers:
Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$ bolts screwed to coupler at approximate © of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel £ to the concrete slab or concrete wearing surface with 2-58" \$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement. at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM


*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

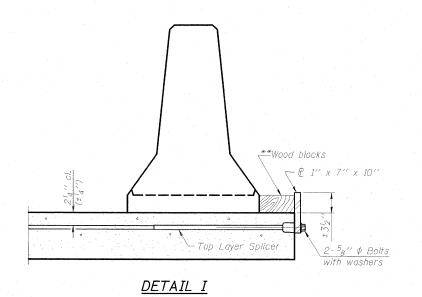

when "A" is greater than 3'-6".

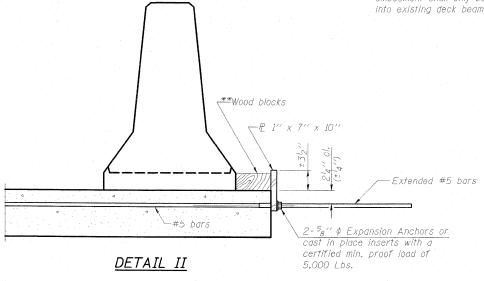

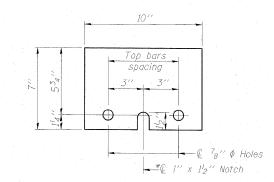

STEEL RETAINER PL 1" x 7" x 10"

* Required only with Detail II

**Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

ESCA

	CONSULTANTS, INC.						
	DESIGNED BY:	DAJ	11/08				
	DRAWN BY:	c j	11/08				
	CHECKED BY:	ELH	11/08				
	APPROVED BY:	RDP	11/08				

R-27 10-1-08

TEMPORARY CONCRETE BARRIER STRUCTURE NO. 037-0172

SHEET NO. 7	F.A.P. RTE.	SECTI	ON	COUNTY	TOTAL SHEETS	SHEET NO.
	638	136BR	1-1	HENRY	67	46
7 SHEETS				CONTRACT	CONTRACT NO. 64428	
	FED. RO	AD DIST, NO. II	LINOIS FED.	AID PROJECT		