

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33,33)PP	CHAMPAIGN	20	1
		ILLINOIS	CONTRACT NO. 70H54	

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 3

TRAFFIC DATA

FAI RTE. 57 / (I 57)	LEG "A"	LEG "B"	LEG "C"	LEG "D"	LEG "E"	LEG "F"	LEG "G"	LEG "H"	LEG "I"	LEG "J"
2024 ADT =	25,800	34,400	1,350	550	2,000	4,150	950	600	1,850	4,150
PV % =	64.6%	64.0%	90.4%	85.4%	83.7%	66.9%	88.4%	88.3%	88.9%	67.5%
SU % =	4.0%	5.2%	5.2%	5.5%	6.3%	11.4%	6.3%	5.0%	4.3%	7.2%
MU % =	31.4%	30.8%	4.4%	9.1%	10.0%	21.7%	5.3%	6.7%	6.8%	25.3%

TRAFFIC DATA LOCATIONS

LEG "A" = I-57 S. of I-57.
LEG "B" = I-57 N. of I-57.
LEG "C" = I-57 NB to FAP 725 EB ramp.
LEG "D" = I-57 NB to FAP 725 EB ramp.
LEG "E" = I-57 SB to I-72 EB ramp.
LEG "F" = FAP 725 EB to I-57 NB ramp.
LEG "G" = I-72 WB to I-57 SB ramp.
LEG "H" = I-57 NB to FAP 725 WB ramp.
LEG "I" = FAP 725 WB to I-57 NB ramp.
LEG "J" = I-57 SB to I-72 WB ramp.

FUNCTIONAL CLASSIFICATION


INTERSTATE

PROPOSED
HIGHWAY PLANS


FAI ROUTE 57 (I 57)
SECTION (10-33,33)PP
PATCHING
CHAMPAIGN COUNTY

C-95-040-25
AT I-72 INTCHG

P-95-012-25

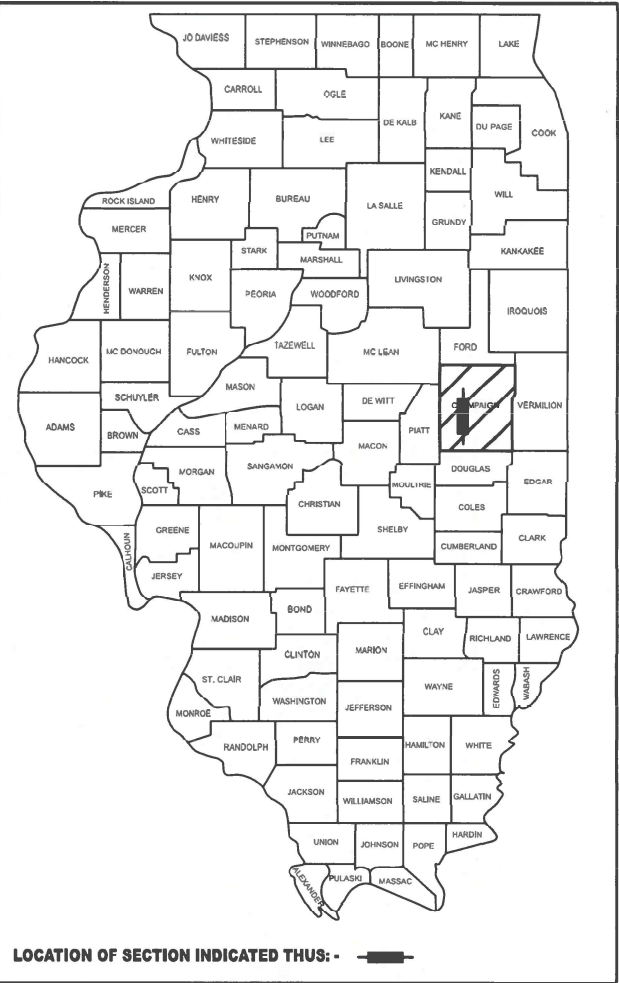


LOCATION OF SECTION INDICATED THUS: -

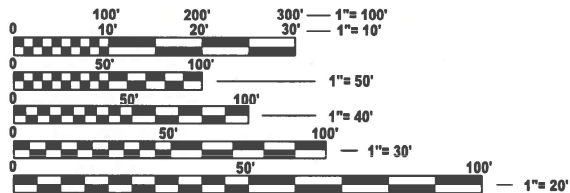

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123 TOWNSHIPS
OR 811 CHAMPAIGN CITY AND CHAMPAIGN

PROJECT ENGINEER: RYAN T. CARROLL
DESIGNER: TYLER J. PIERSON
PHONE NUMBER: 217-465-4181
CONTRACT NO. 70H54

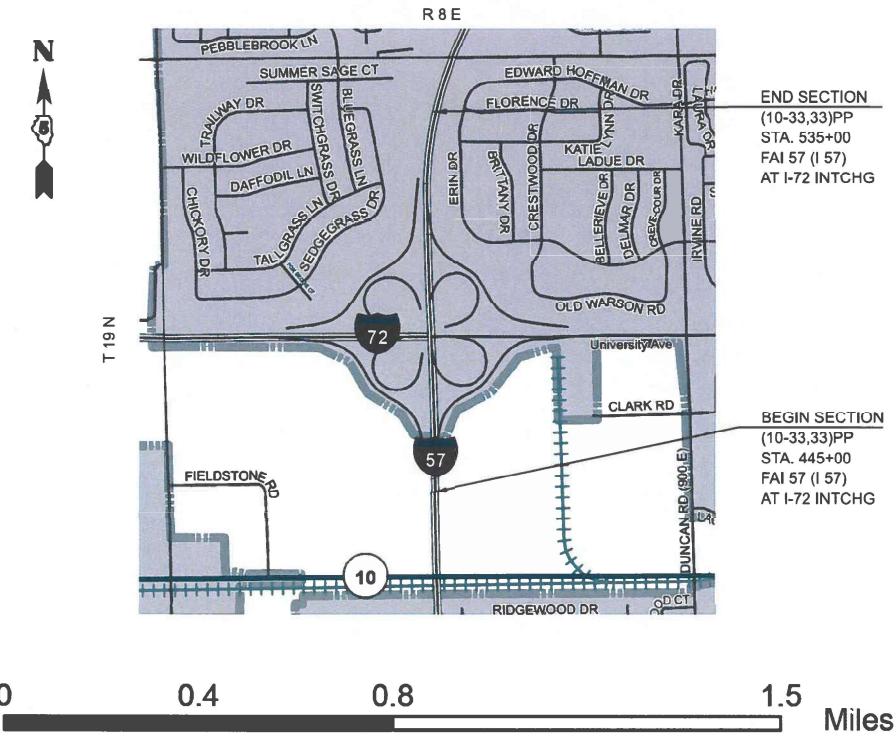

GROSS LENGTH = 9,000.00 FT. = 1.705 MILE
NET LENGTH = 9,000.00 FT. = 1.705 MILE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 01/24/2025
Kensil A. Burnett REGIONAL ENGINEER
March 21, 2025
[Signature] ENGINEER OF DESIGN AND ENVIRONMENT
March 21, 2025
[Signature] DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER
2	INDEX OF SHEETS, LIST OF HIGHWAY STANDARDS, GENERAL NOTES, & COMMITMENTS
3	SUMMARY OF QUANTITIES
4 to 5	FAI 57 TYPICAL CROSS-SECTIONS
6 to 7	SCHEDULE OF QUANTITIES
8	PLAN SHEET FAI 57 & FAI 72 INTERCHANGE
9 to 20	DETOUR MAPS

GENERAL NOTES

G.N.-100A
ELECTRONIC FILES AND/OR ELECTRONIC SURVEY INFORMATION INCLUDING CADD
FILES WILL NOT BE AVAILABLE TO THE CONTRACTOR.

HIGHWAY STANDARDS

STANDARD NO.	DESCRIPTION
000001-08	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001001-02	AREAS OF REINFORCEMENT BARS
001006	DECIMAL OF AN INCH AND OF A FOOT
442101-09	CLASS B PATCHES
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS ≥ 45 MPH
701428-01	TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
701451-05	RAMP CLOSURE FREEWAY/EXPRESSWAY
701901-10	TRAFFIC CONTROL DEVICES

COMMITMENTS

THERE ARE NO COMMITMENTS FOR THIS CONTRACT

MODEL: Index Standards GN Commit [Sheet]
FILE NAME: c:\pw_workspace\projects\1033076\0570H54-shl-Index_Standards_General Notes_Commitments.dgn

	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, LIST OF STANDARDS, GENERAL NOTES, & COMMITMENTS	F&I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -			57	(10-33.33)PP	CHAMPAIGN	20	2
		CHECKED -	REVISED -			CONTRACT NO. 70H54				
	PLOT DATE = 1/24/2025	DATE -	REVISED -			ILLINOIS FED. AID PROJECT				
						SCALE:	SHEET 1	OF 1	SHEETS	STA.

SUMMARY OF QUANTITIES

LOCATION OF WORK:

FUNDING BREAKOUT:
CONSTRUCTION TYPE CODE:


FAI (I 57)
INTERSTATE

URBAN
STA. 445+00
STA. 535+00
CHAMPAIGN
100% STATE
0006


	CODE NO.	ITEM	UNIT	TOTAL QUANTITY
	44200050	WELDED WIRE REINFORCEMENT	SQ YD	339.00
	44201031	CLASS B PATCHES, TYPE II, 15 INCH	SQ YD	690.00
	44201035	CLASS B PATCHES, TYPE III, 15 INCH	SQ YD	36.00
	44201037	CLASS B PATCHES, TYPE IV, 15 INCH	EACH	303.00
	44201299	DOWEL BARS 1 1/2"	POUND	1,616.00
	44213200	SAW CUTS	FOOT	3,830.00
	44213204	TIE BARS 3/4"	EACH	70.00
	67100100	MOBILIZATION	L SUM	1.00
	70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	8.00
	70100820	TRAFFIC CONTROL AND PROTECTION, STANDARD 701451	L SUM	1.00
	70107025	CHANGEABLE MESSAGE SIGN	CAL DA	42.00
	X7200203	DETOUR SIGNING	L SUM	1.00
	Z0013798	CONSTRUCTION LAYOUT	L SUM	1.00
* DENOTES SPECIALTY ITEM				

MODEL: SOQ-1 [Sheet]
FILE NAME: c:\pw\work\pierson\fd1053076D570G88-shh-SOQ.dgn

EXISTING TYPICAL SECTION ①

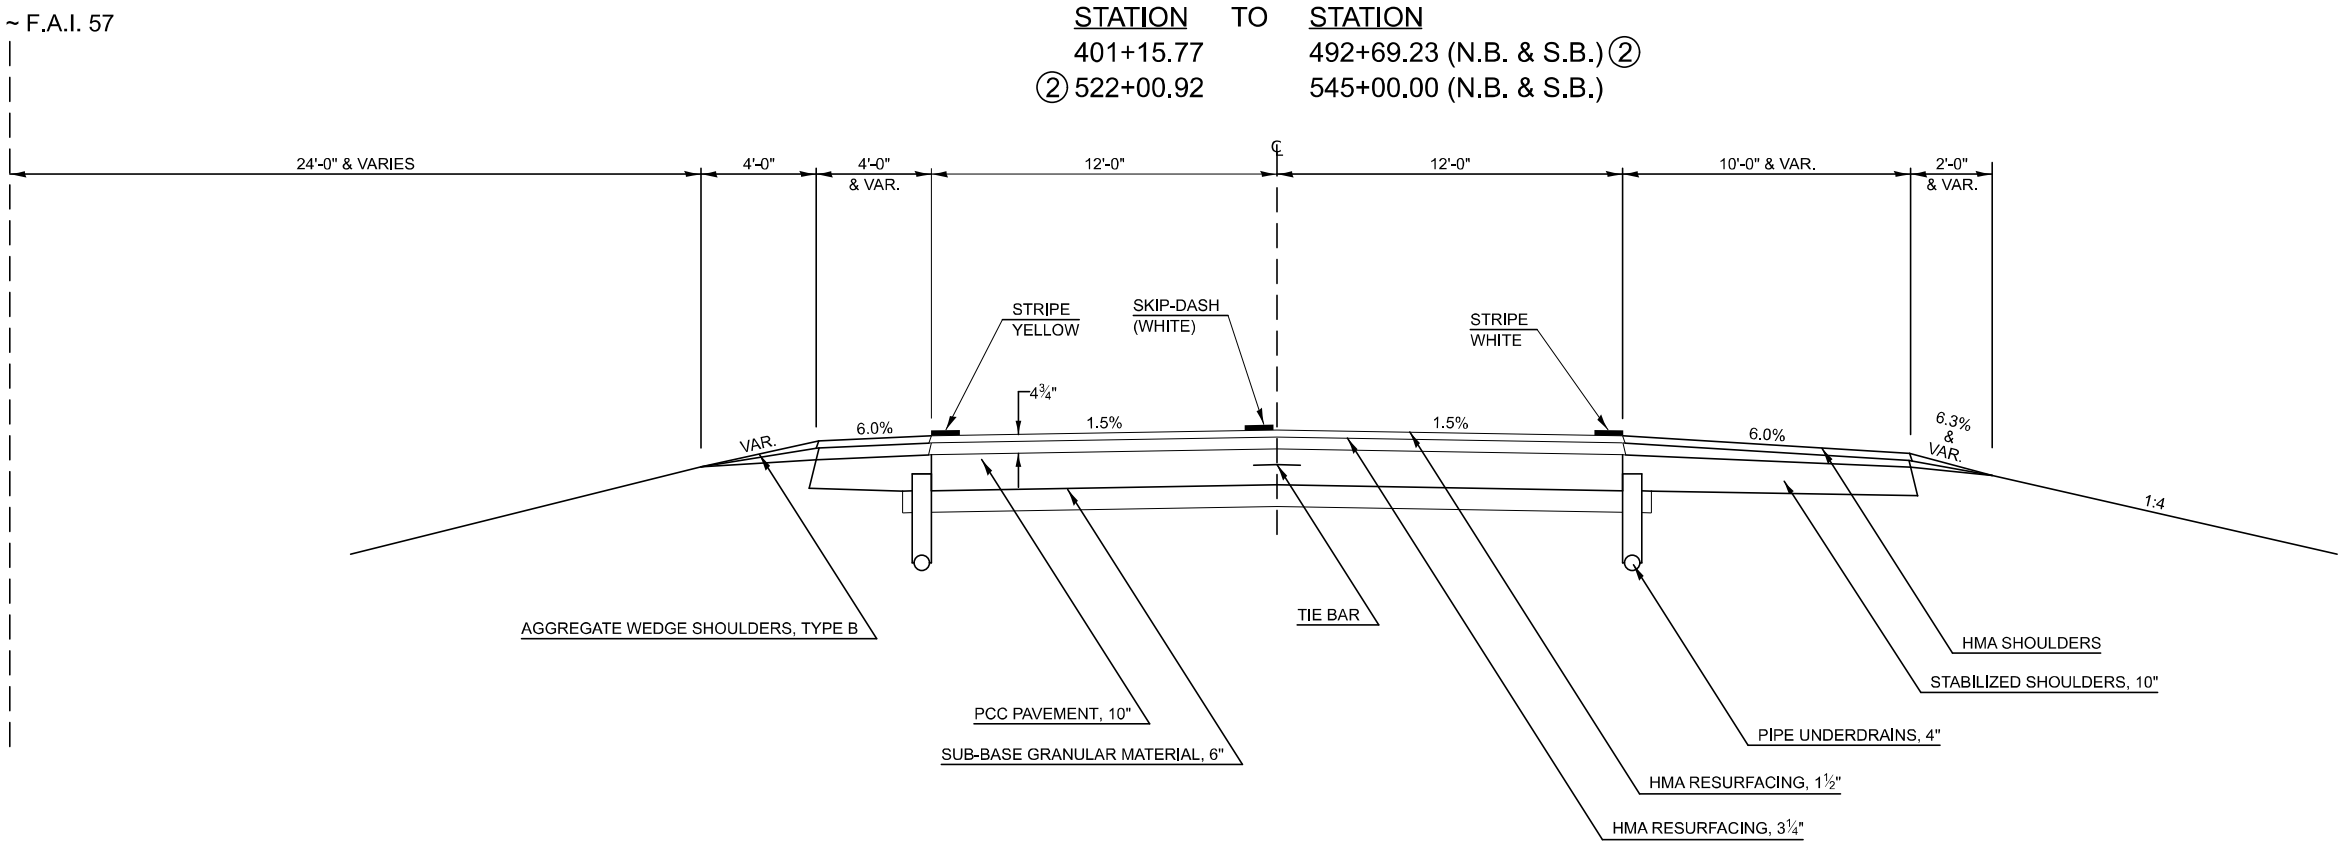

EXISTING TYPICAL SECTION ②

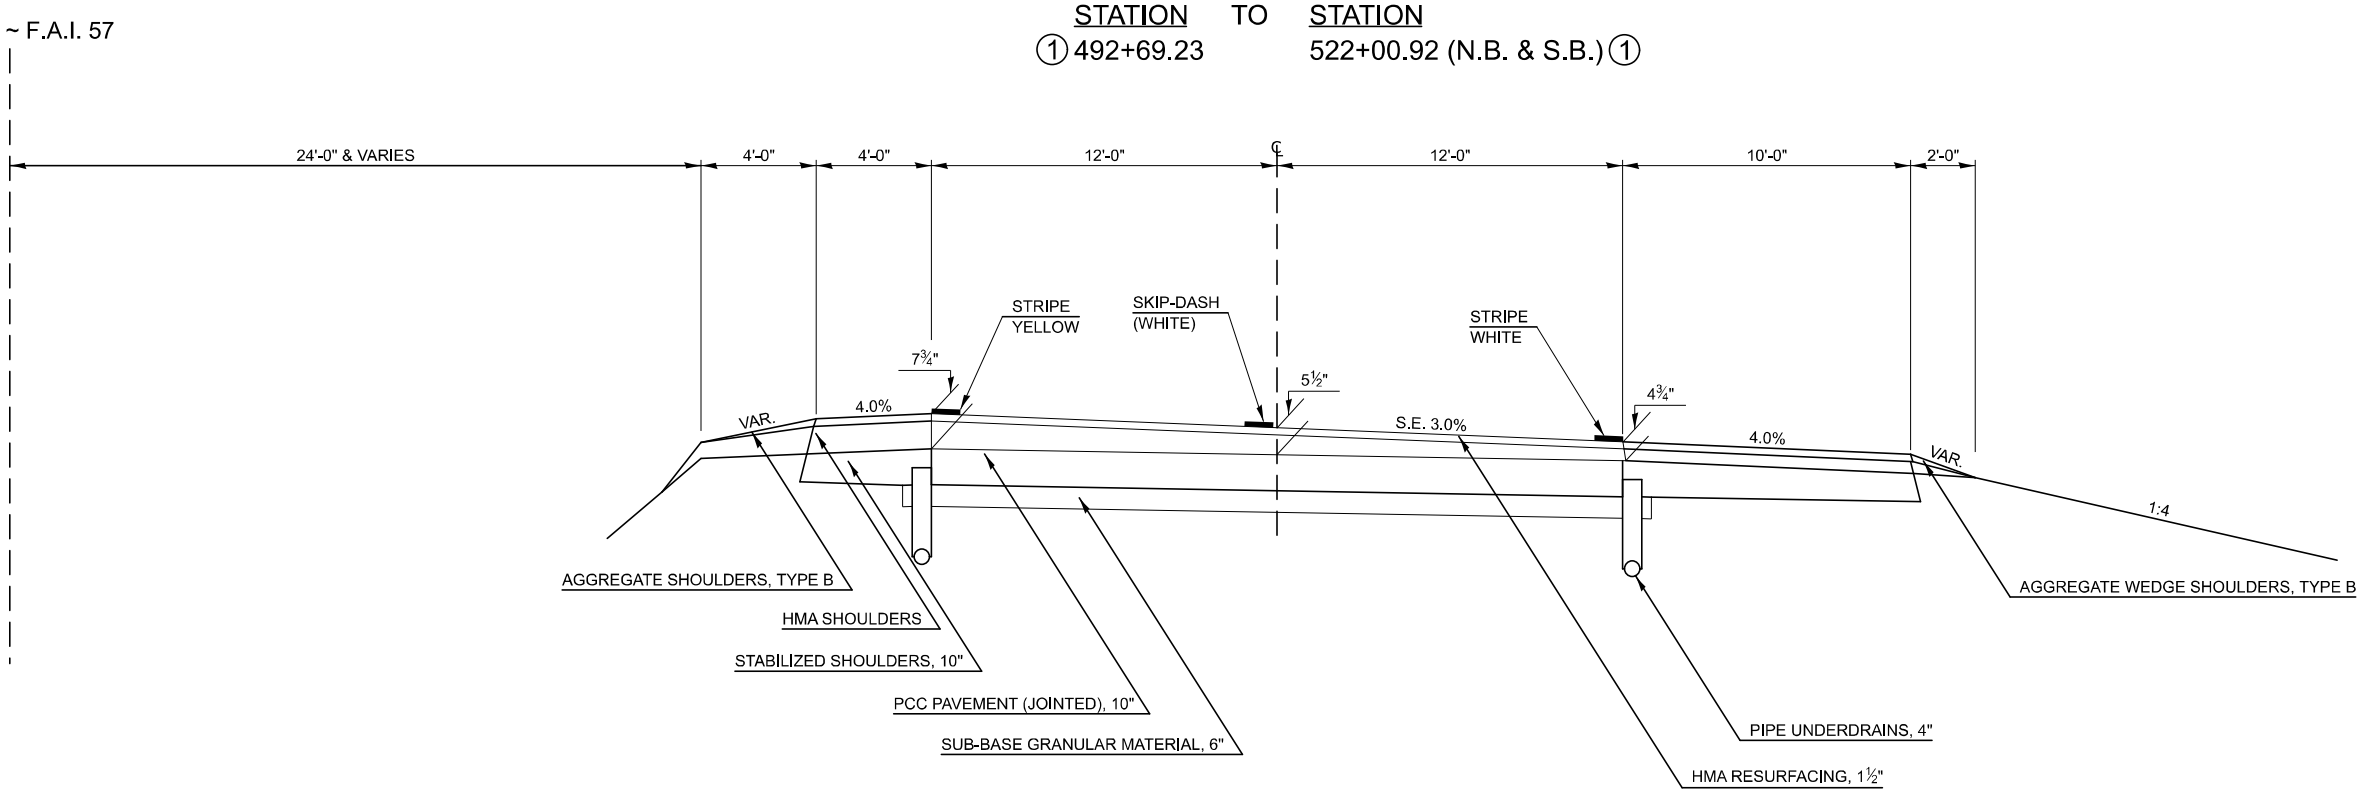

MODEL: Typical-1 [Sheet]
FILE NAME: c:\p\work\pierson\fd1053076\DS70H54-shr-Typical Cross Sections.dgn

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION



FAI 57 (I 57) TYPICAL CROSS-SECTIONS

SCALE: SHEET 1 OF 2 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	4
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



EXISTING TYPICAL SECTION – I-57 /I-72 RAMPS 3

F.A.I. 72 AND F.A.I. 57 - RAMP E
F.A.I. 72 AND F.A.I. 57 - RAMP F
F.A.I. 72 AND F.A.I. 57 - RAMP G
F.A.I. 72 AND F.A.I. 57 - RAMP H

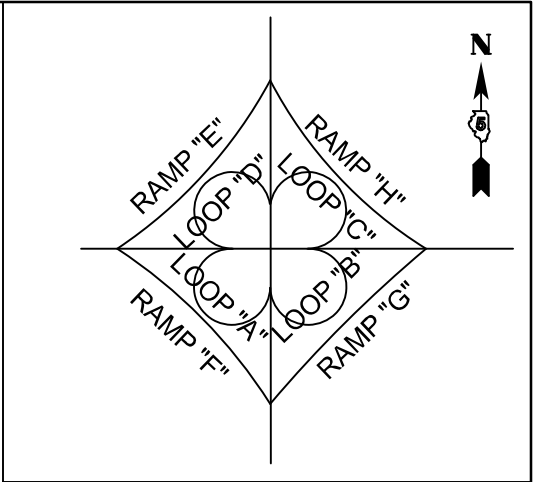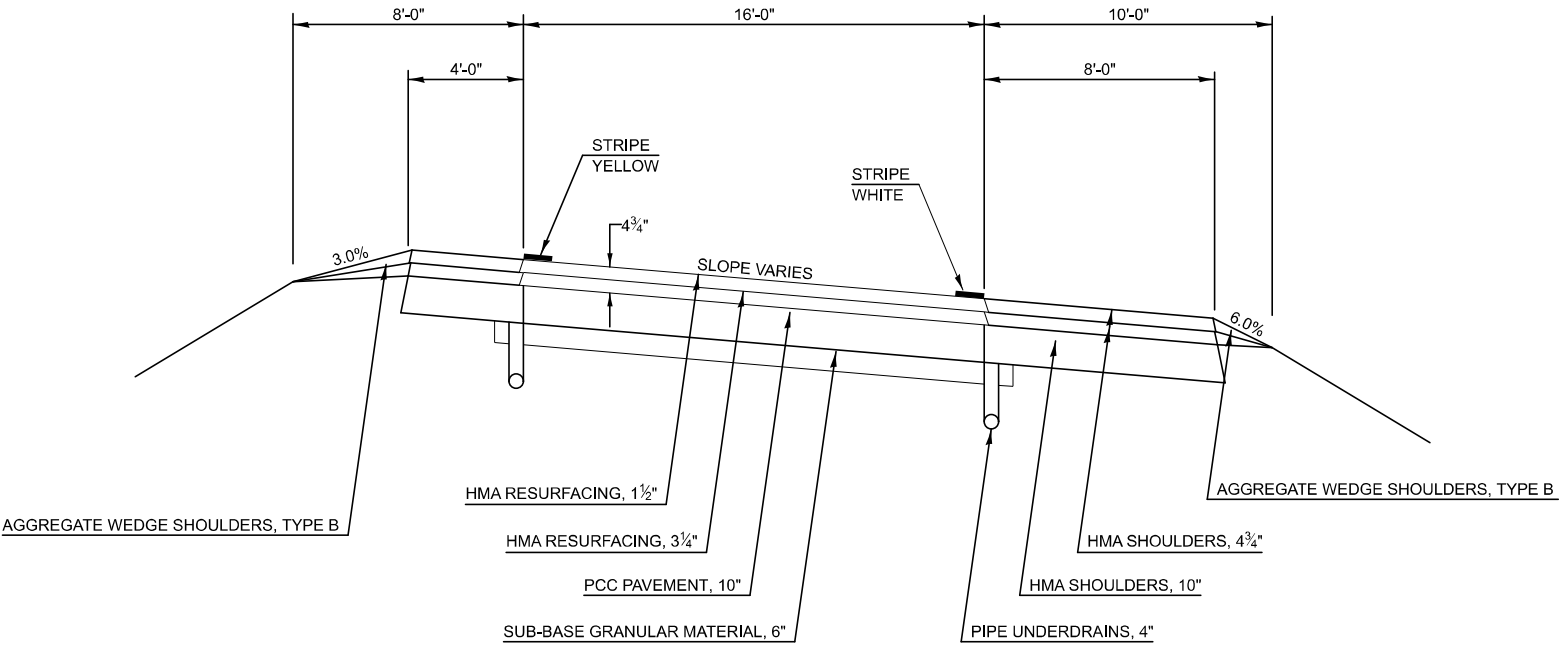

EXISTING TYPICAL SECTION – I-57 /I-72 LOOPS 4

F.A.I. 72 AND F.A.I. 57 - LOOP A
F.A.I. 72 AND F.A.I. 57 - LOOP B
F.A.I. 72 AND F.A.I. 57 - LOOP C
F.A.I. 72 AND F.A.I. 57 - LOOP D

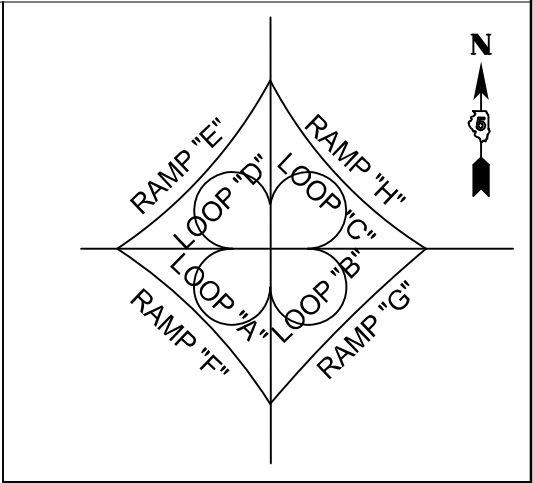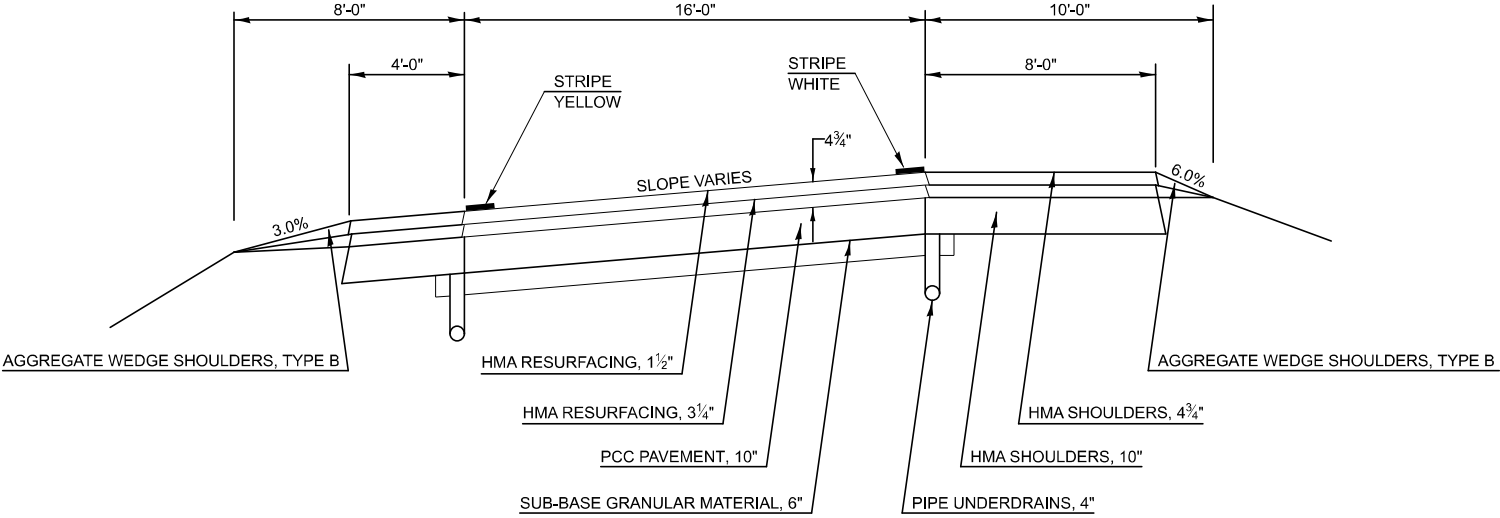

MODEL: Typical-2 [Sheet]
FILE NAME: c:\paw\work\pierson\fd1053076D570H54-shlr-Typical Cross Sections.dgn

	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
	PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

I 57 / I 72 INTERCHANGE RAMP TYPICAL CROSS-SECTIONS			
SCALE:	SHEET 2	OF 2	SHEETS
	STA.		TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	5
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

SCHEDULES OF QUANTITIES

CLASS B PATCHING LOOP A SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
2	1+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	1+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	5+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	6+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	8+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	10+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							0.00	0.00	85.33	0.00	0.00	168.00	384.00	0.00
ROUNDED TOTALS =							0.00	0.00	86.00	0.00	0.00	168.00	384.00	0.00

CLASS B PATCHING RAMP F SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
3	172+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	173+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	177+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	182+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							0.00	0.00	56.89	0.00	0.00	112.00	256.00	0.00
ROUNDED TOTALS =							0.00	0.00	57.00	0.00	0.00	112.00	256.00	0.00

CLASS B PATCHING RAMP D SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
2	92+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	100+00	6	16	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	28.00	60.00	0.00
2	101+00	6	16	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	28.00	60.00	0.00
2	102+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	102+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							0.00	0.00	64.00	0.00	0.00	140.00	312.00	0.00
ROUNDED TOTALS =							0.00	0.00	64.00	0.00	0.00	140.00	312.00	0.00

CLASS B PATCHING RAMP G SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
3	205+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	214+10	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	215+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	215+70	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	216+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	221+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	221+25	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	221+75	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							0.00	0.00	113.78	0.00	0.00	224.00	512.00	0.00
ROUNDED TOTALS =							0.00	0.00	114.00	0.00	0.00	224.00	512.00	0.00

CLASS B PATCHING RAMP E SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
3	128+50	50	16	15	800.00	88.89	88.89	0.00	0.00	0.00	88.89	70.00	148.00	17.00
3	130+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	132+00	10	16	15	160.00	17.78	17.78	0.00	0.00	17.78	0.00	28.00	68.00	0.00
3	133+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	134+00	10	16	15	160.00	17.78	17.78	0.00	0.00	17.78	0.00	28.00	68.00	0.00
3	134+25	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	136+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	138+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	140+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	141+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							124.45	0.00	99.56	35.56	88.89	322.00	732.00	17.00
ROUNDED TOTALS =							125.00	0.00	100.00	36.00	89.00	322.00	732.00	17.00

CLASS B PATCHING RAMP H SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
3	246+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	246+75	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	247+75	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	250+25	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	252+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	252+50	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	254+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	256+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	257+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	258+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	260+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	262+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
3	263+00	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
TOTALS =							0.00	0.00	184.89	0.00	0.00	364.00	832.00	0.00
ROUNDED TOTALS =							0.00	0.00	185.00	0.00	0.00	364.00	832.00	0.00

MODEL: Schedules-1 [Sheet]
FILE NAME: c:\paw_work\paw\pierson\01053076\DD570H54-shh-Schedule.dgn

	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES OF QUANTITIES				F&I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						57	(10-33.33)PP	CHAMPAIGN	20	6
		CHECKED -	REVISED -				CONTRACT NO. 70H54						
	PLOT DATE = 1/24/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 2	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		


SCHEDULES OF QUANTITIES

CLASS B PATCHING I 57 NBDL SCHEDULE														
TYPICAL	STA / LOCATION	LENGTH FT	WIDTH FT	THICKNESS IN	AREA SQ FT	AREA SQ YD	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204
							WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"
2	497+60	8	16	15	128.00	14.22	0.00	0.00	14.22	0.00	0.00	28.00	64.00	0.00
2	510+00	120	12	15	1,440.00	160.00	160.00	0.00	0.00	0.00	160.00	90.00	276.00	40.00
1	526+00	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00
1	528+00	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00
1	529+00	8	6	15	48.00	5.33	0.00	0.00	5.33	0.00	0.00	8.00	34.00	0.00
1	532+00	40	12	15	480.00	53.33	53.33	0.00	0.00	0.00	53.33	40.00	116.00	13.00
1	535+00	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00
TOTALS =							213.33	0.00	51.56	0.00	213.33	226.00	646.00	53.00
ROUNDED TOTALS =							214.00	0.00	52.00	0.00	214.00	226.00	646.00	53.00

CLASS B PATCHING I 57 SB SCHEDULE																
TYPICAL	STA / LOCATION	LANE	LENGTH	WIDTH	THICKNESS	AREA	AREA	44200050	44201027	44201031	44201035	44201037	44201299	44213200	44213204	
								WELDED WIRE REINF	CLASS B PATCHES, TYPE I, 15 INCH	CLASS B PATCHES, TYPE II, 15 INCH	CLASS B PATCHES, TYPE III, 15 INCH	CLASS B PATCHES, TYPE IV, 15 INCH	DOWEL BARS 1 1/2"	SAW CUTS	TIE BARS 3/4"	
			FT	FT	IN	SQ FT	SQ YD	SQ YD	SQ YD	SQ YD	SQ YD	SQ YD	SQ YD	EACH	FOOT	EACH
1	453+50 DL	DL	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00	
1	448+00 DL	DL	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00	
1	445+00 PL	PL	8	12	15	96.00	10.67	0.00	0.00	10.67	0.00	0.00	20.00	52.00	0.00	
TOTALS -								0.00	0.00	32.00	0.00	0.00	60.00	156.00	0.00	
ROUNDED TOTALS =								0.00	0.00	32.00	0.00	0.00	60.00	156.00	0.00	

MODEL: Schedule-2 (Sheet)
FILE NAME: c:\p\work\pierson\fd1053076\DS70H54-shh-Schedule.dgn

MODEL: Interchange Plan (Sheet)
FILE NAME: c:\pwworking\pierson\fd1053076\DS70H54-shi-Interchange Plan.dgn

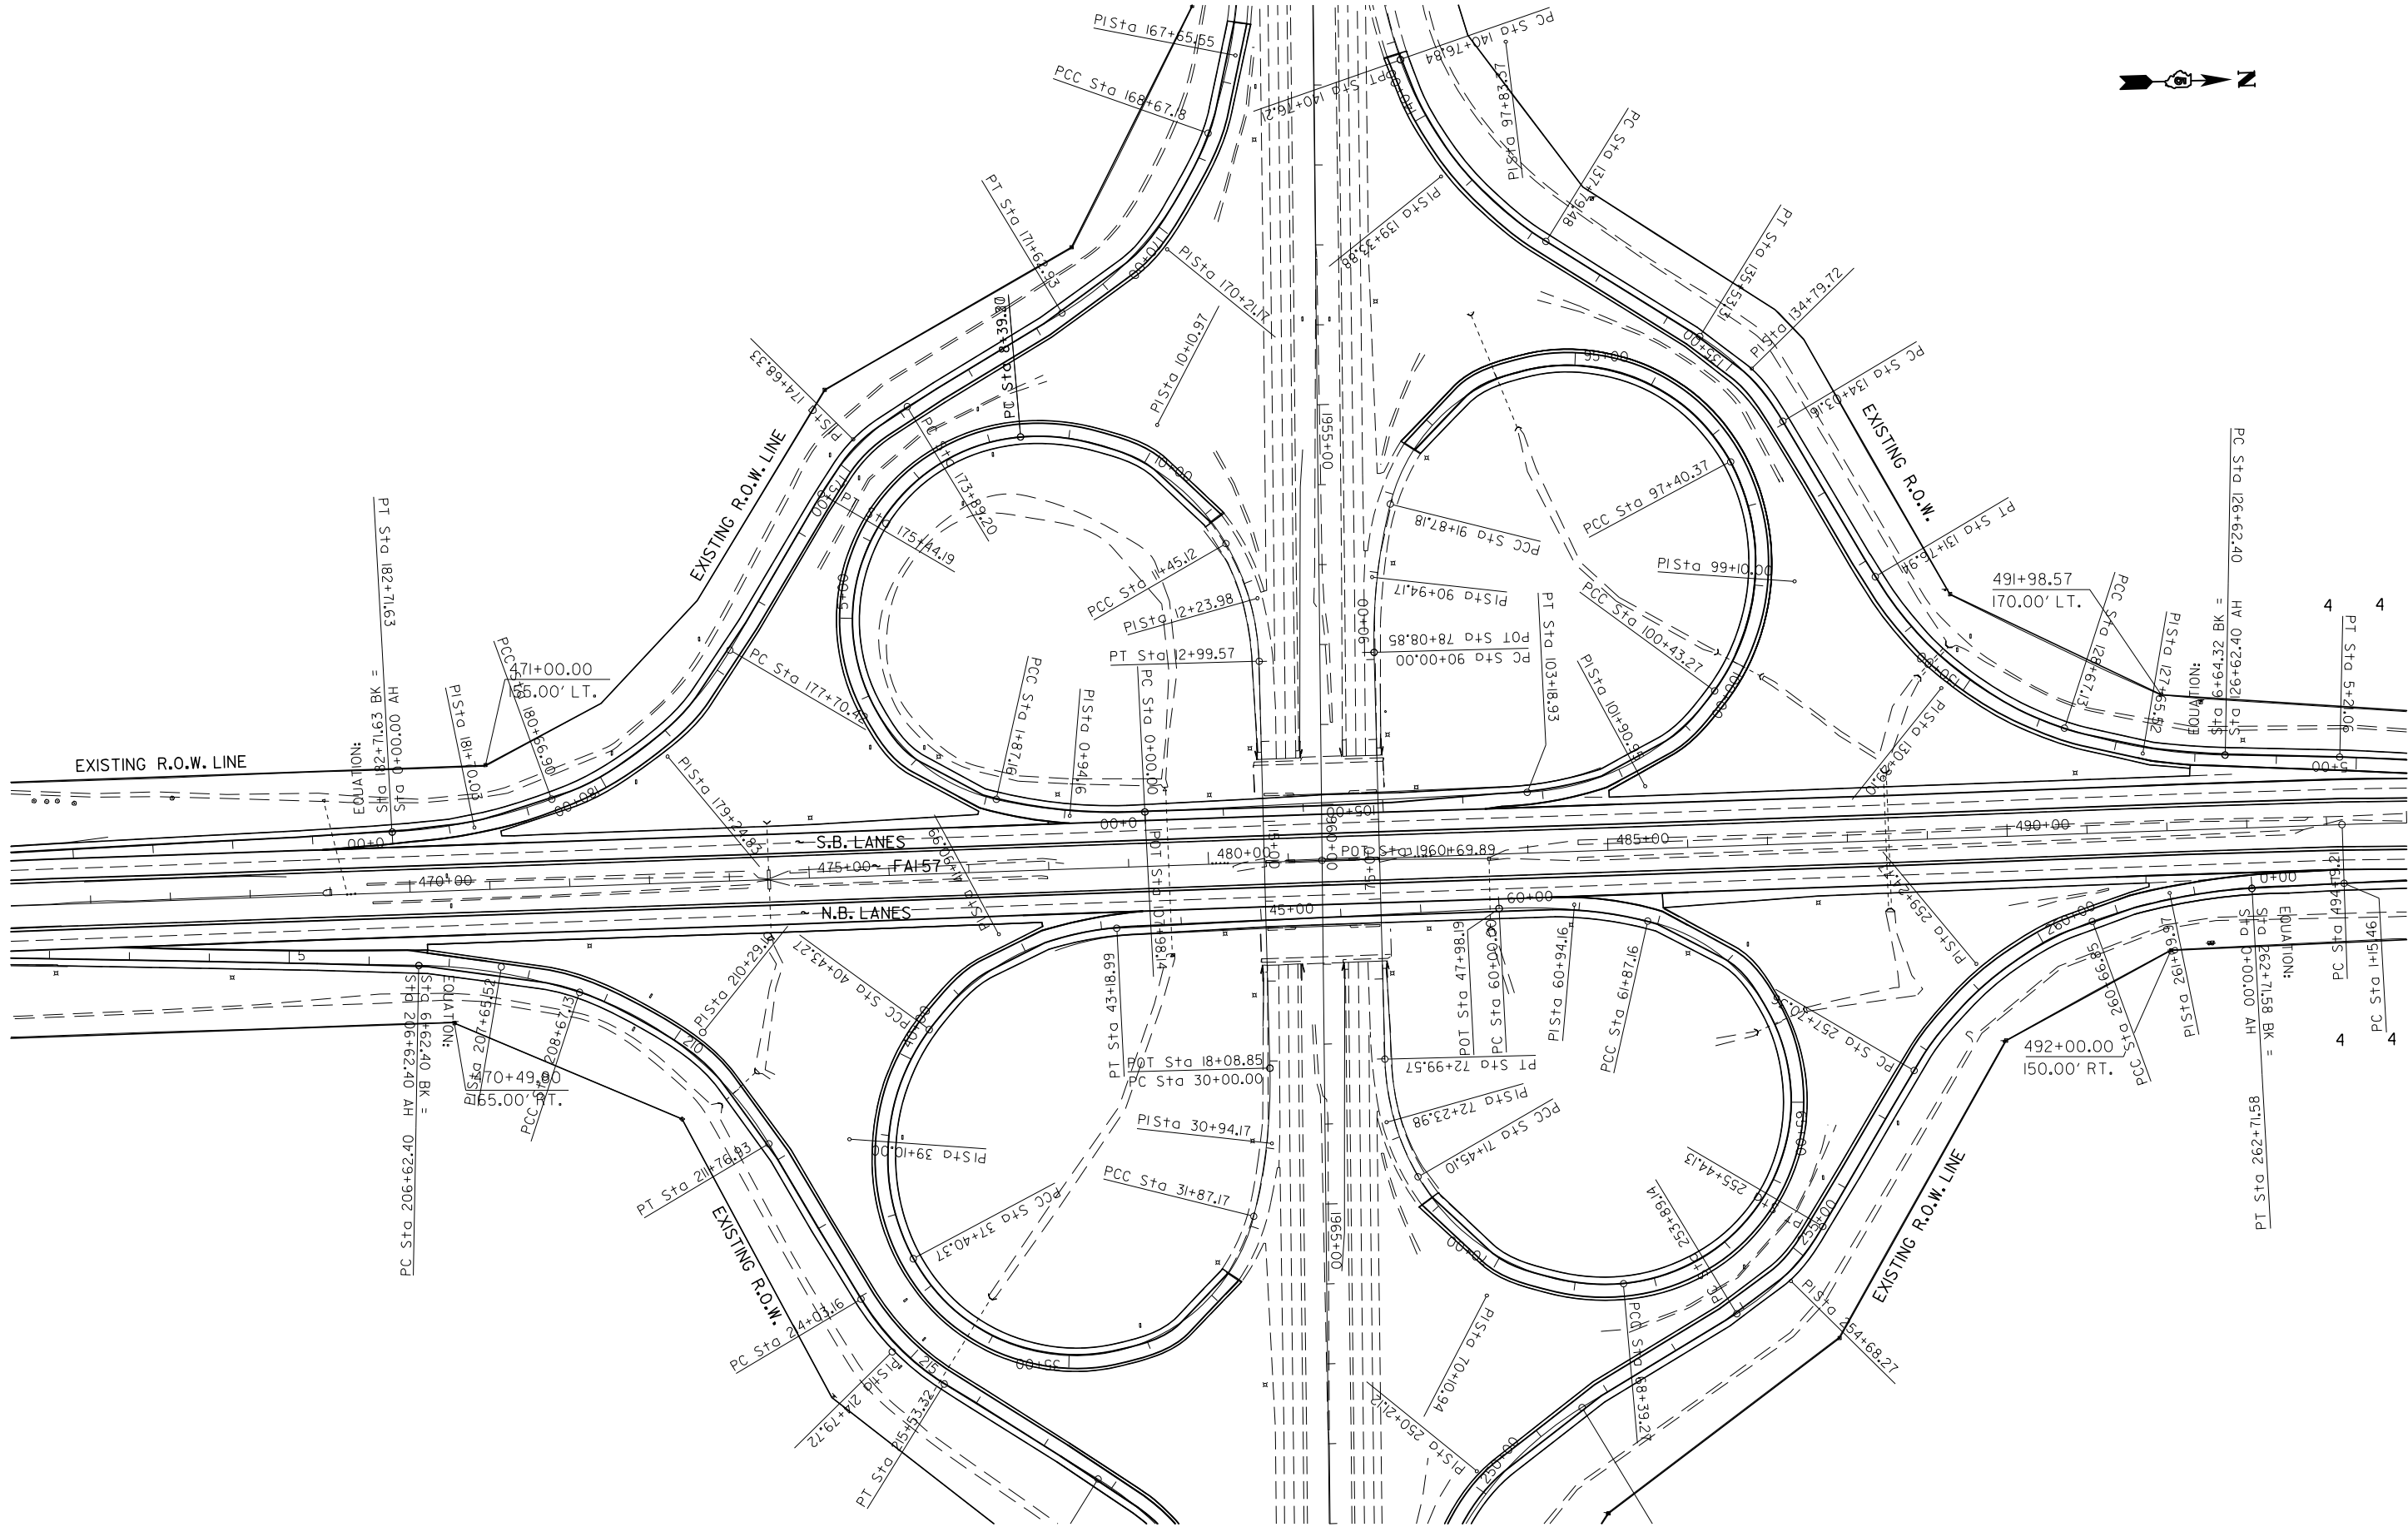

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PLAN SHEET
FAI 57 & FAI 72 INTERCHANGE

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	8
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



MODEL: Detour Map-1 (Sheet)
FILE NAME: c:\p\work\p\person\1053076\570H54-sht-Detour-Maps.dgn

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
LOOP A

SCALE: SHEET 1 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	9
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



MODEL: Detour Map-2 (Sheet)
FILE NAME: c:\p\work\p\work\p\person\1053076\570H54-sht-Detail-Detour-Maps.dgn

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
LOOP A

SCALE: SHEET 2 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	10
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



MODEL: Detour Map-3 (Sheet)
FILE NAME: c:\p\work\pierson\1053076D570H54-shit-Detail-Detour Maps.dgn


	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
	PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP B

SCALE: SHEET 3 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	11
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

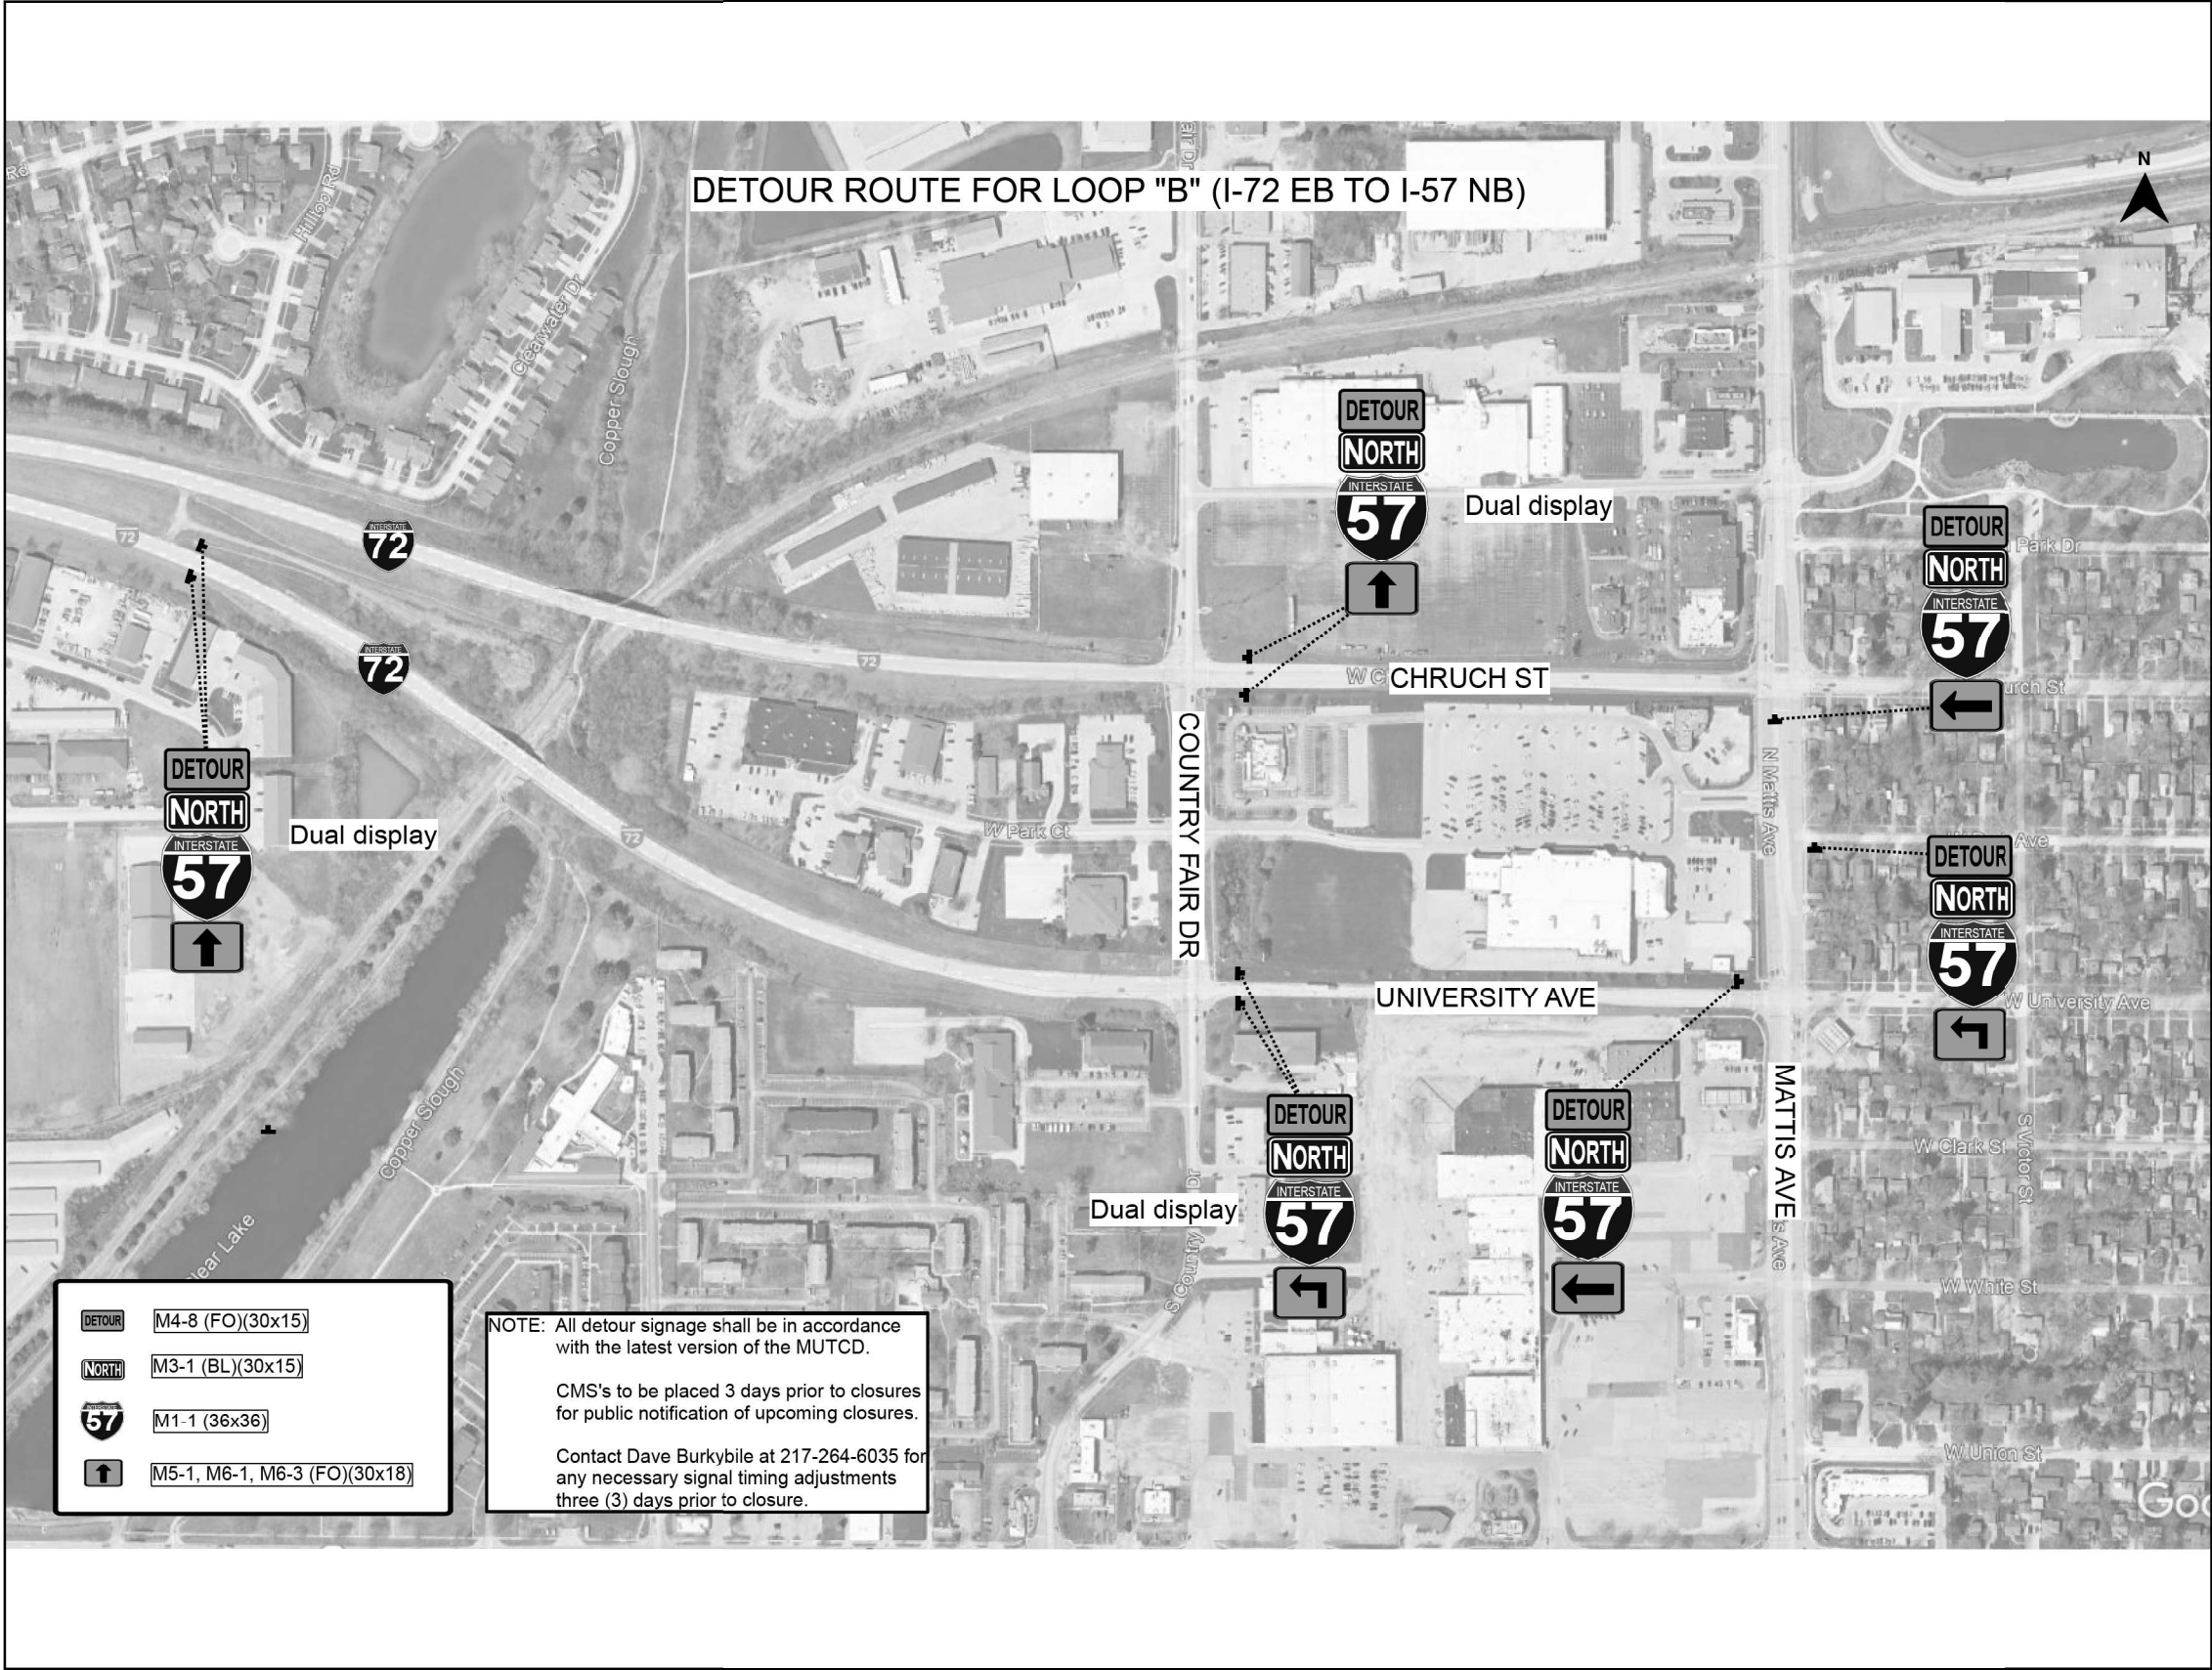

MODEL: Detour Map-4 (Sheet)
FILE NAME: c:\p\work\p\work\p\person\1053076D570H54-shit-Detail-Detour Maps.dgn

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP B

SCALE: SHEET 4 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	12
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



MODEL: Detour Map-5 (Sheet)
FILE NAME: c:\p\work\p\person\1053076D570H54-sht-Detail-Detour Maps.dgn


USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP E

SCALE: SHEET 5 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	13
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

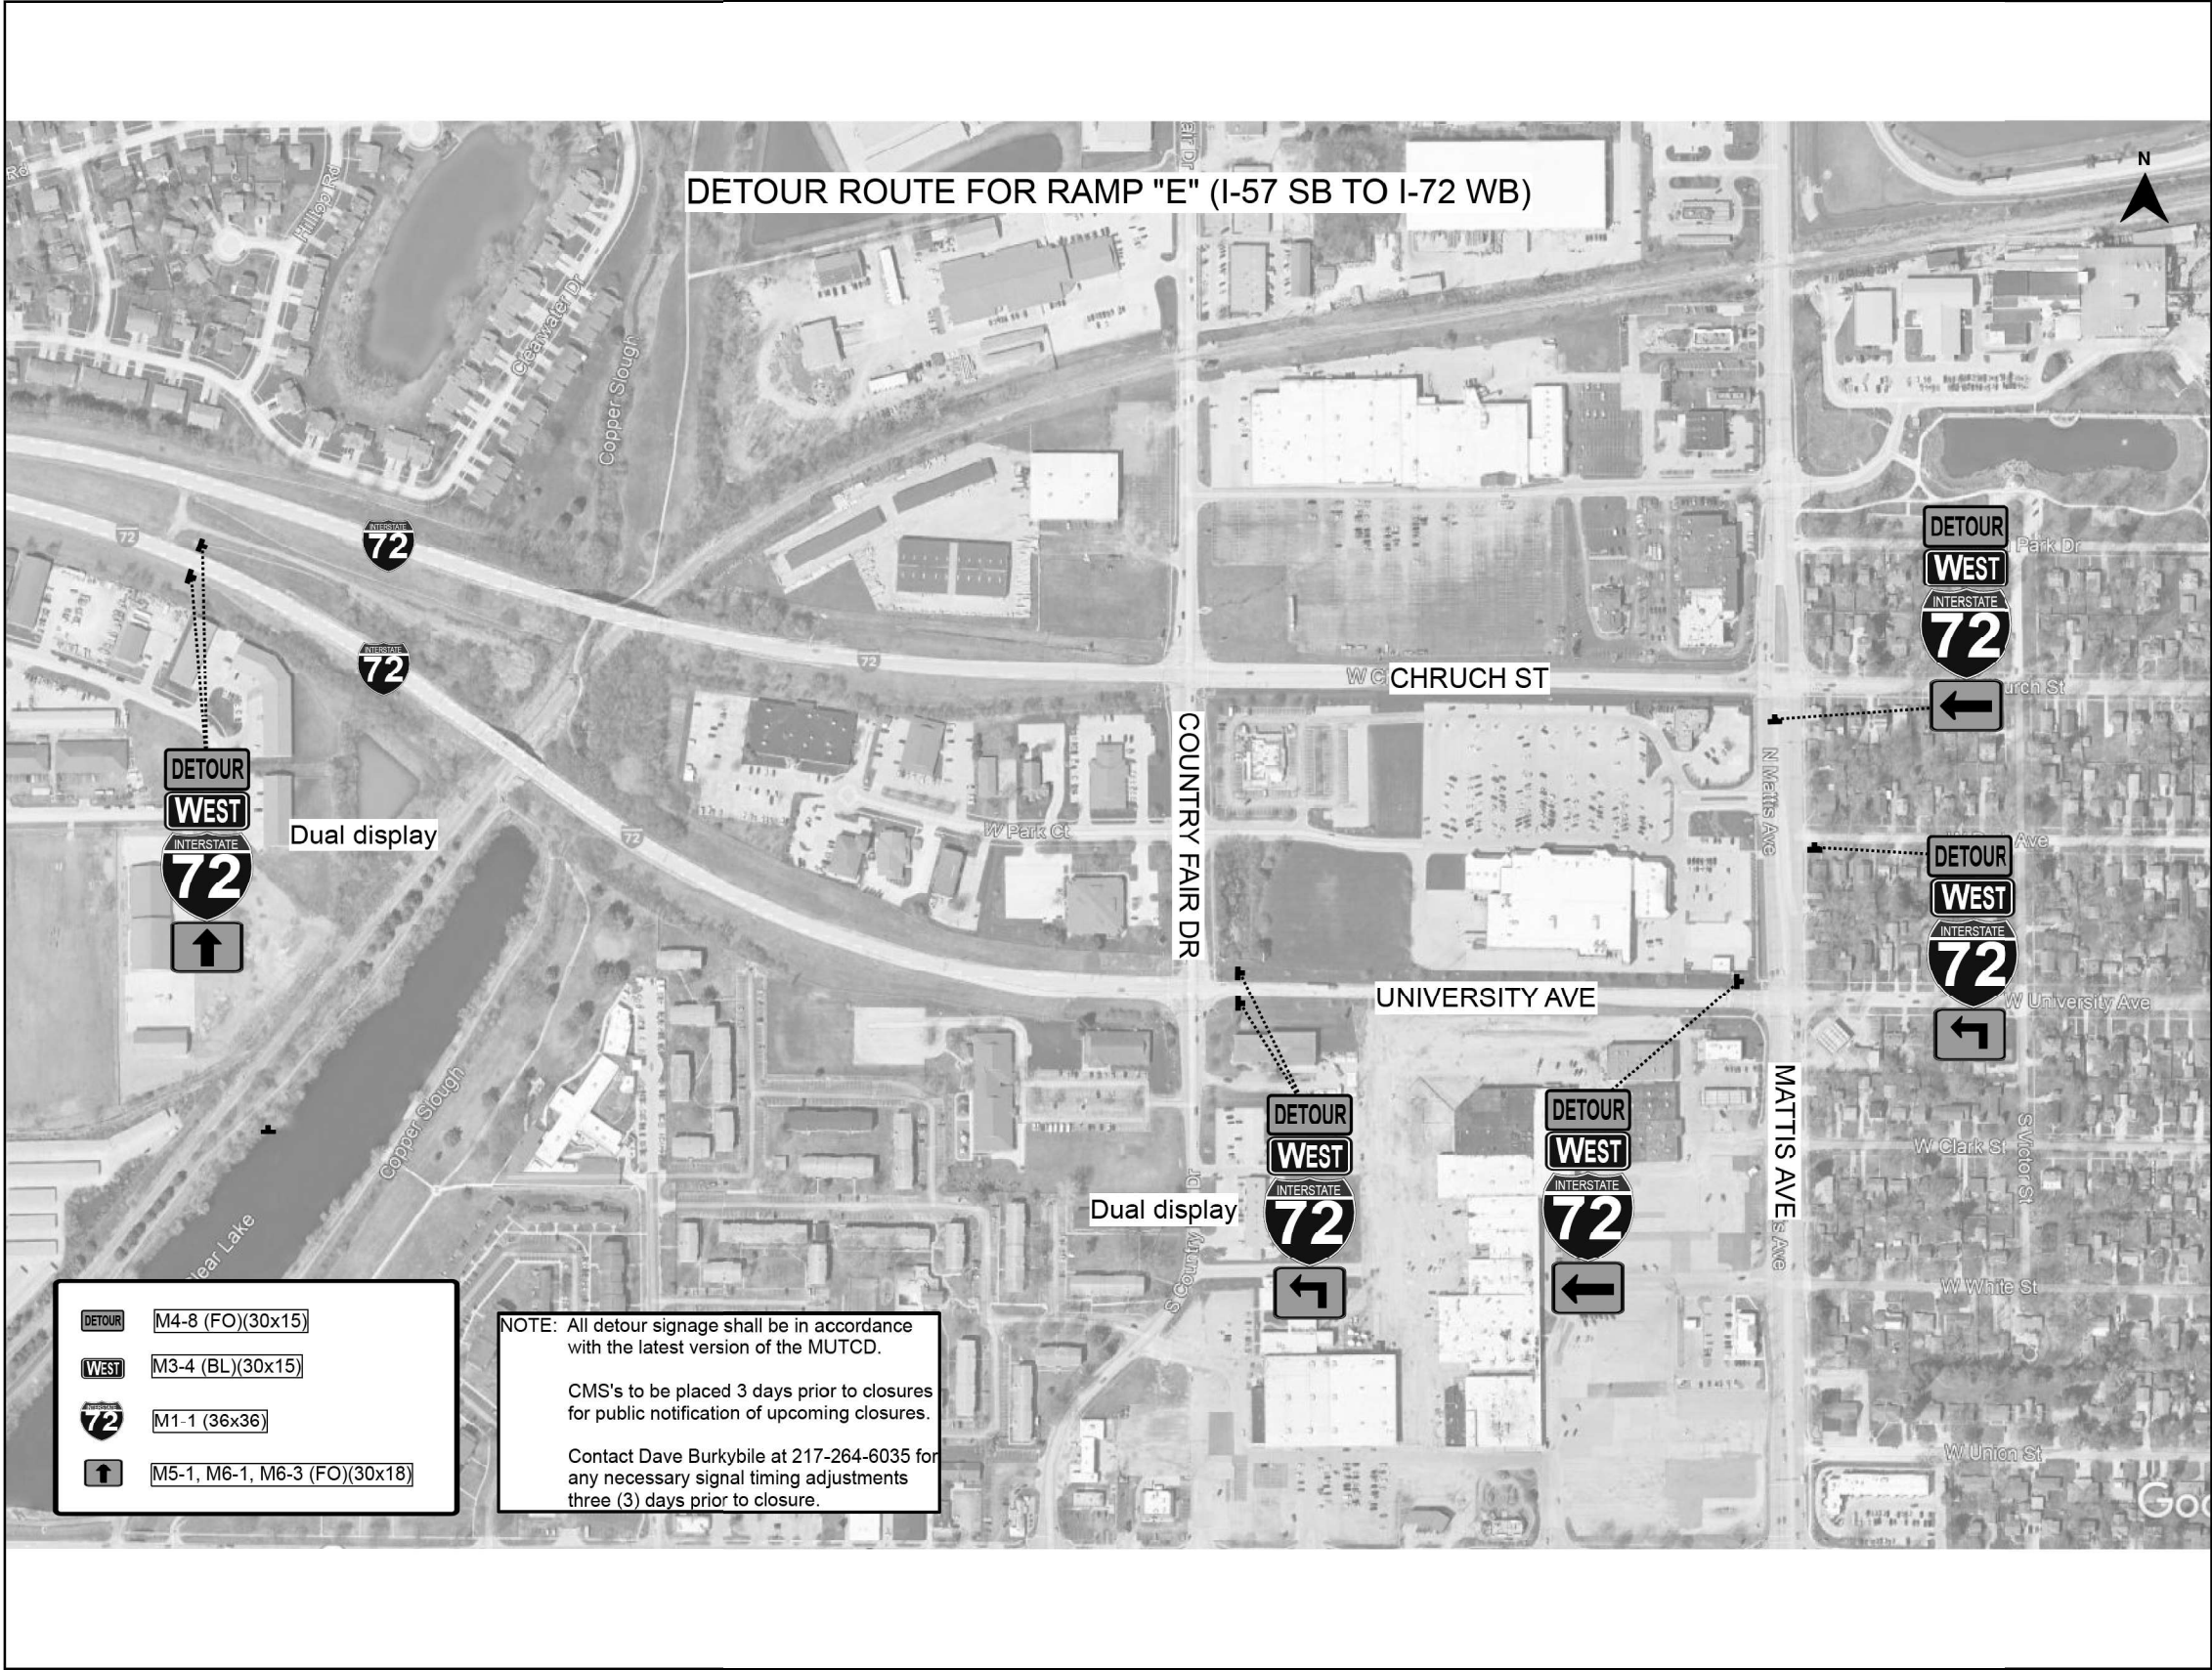

MODEL: Detour Map-S (Sheet)
FILE NAME: c:\p\work\p\person\1053076\570H54-sht-Detour-Maps.dgn

USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP E

SCALE: SHEET 6 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	14
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				



MODEL: Detour Map-7 (Sheet)
FILE NAME: c:\p\work\p\work\p\person\1053076\570H54-sht-Detail-Detour Maps.dgn


PLOT DATE = 1/24/2025	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
	DATE -		REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP F

SCALE: SHEET 7 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	15
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

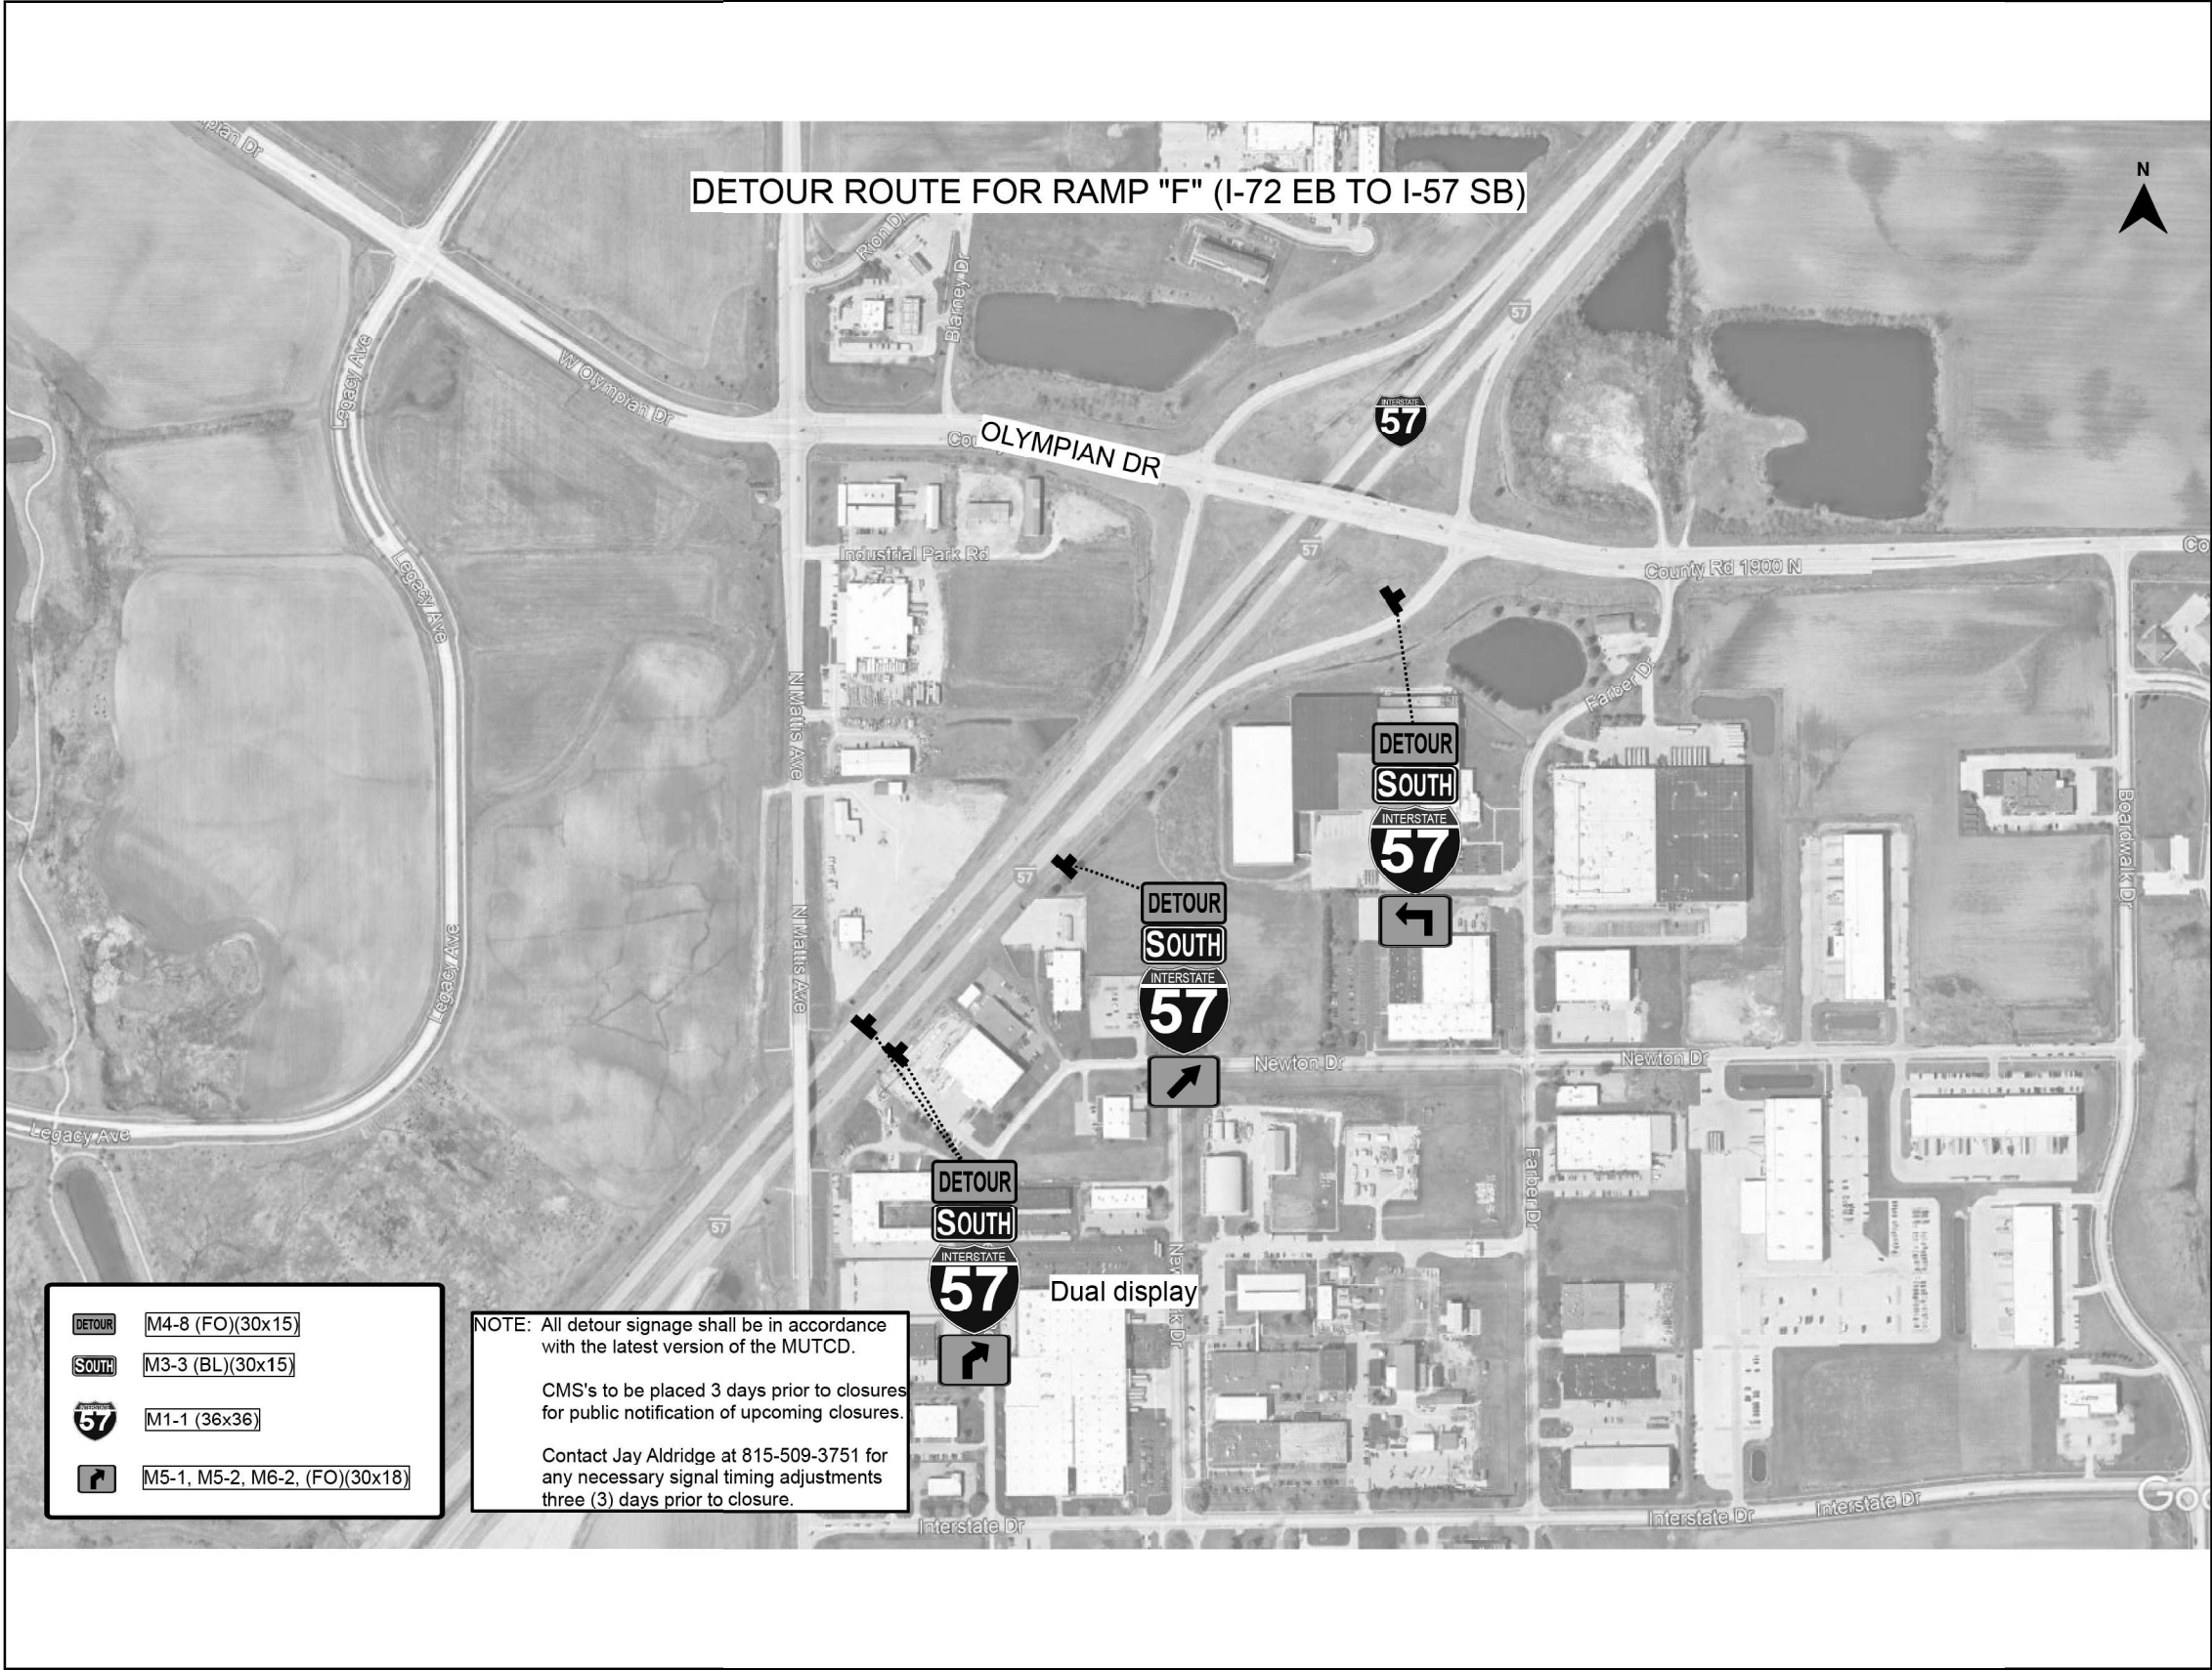

MODEL: Detour Map-8 (Sheet)
FILE NAME: c:\p\work\p\person\1053076D570H54-sht-Detour-Maps.dgn


PLOT DATE = 1/24/2025	USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
	DATE -	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETOUR MAP
RAMP F

SCALE: SHEET 8 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	16
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

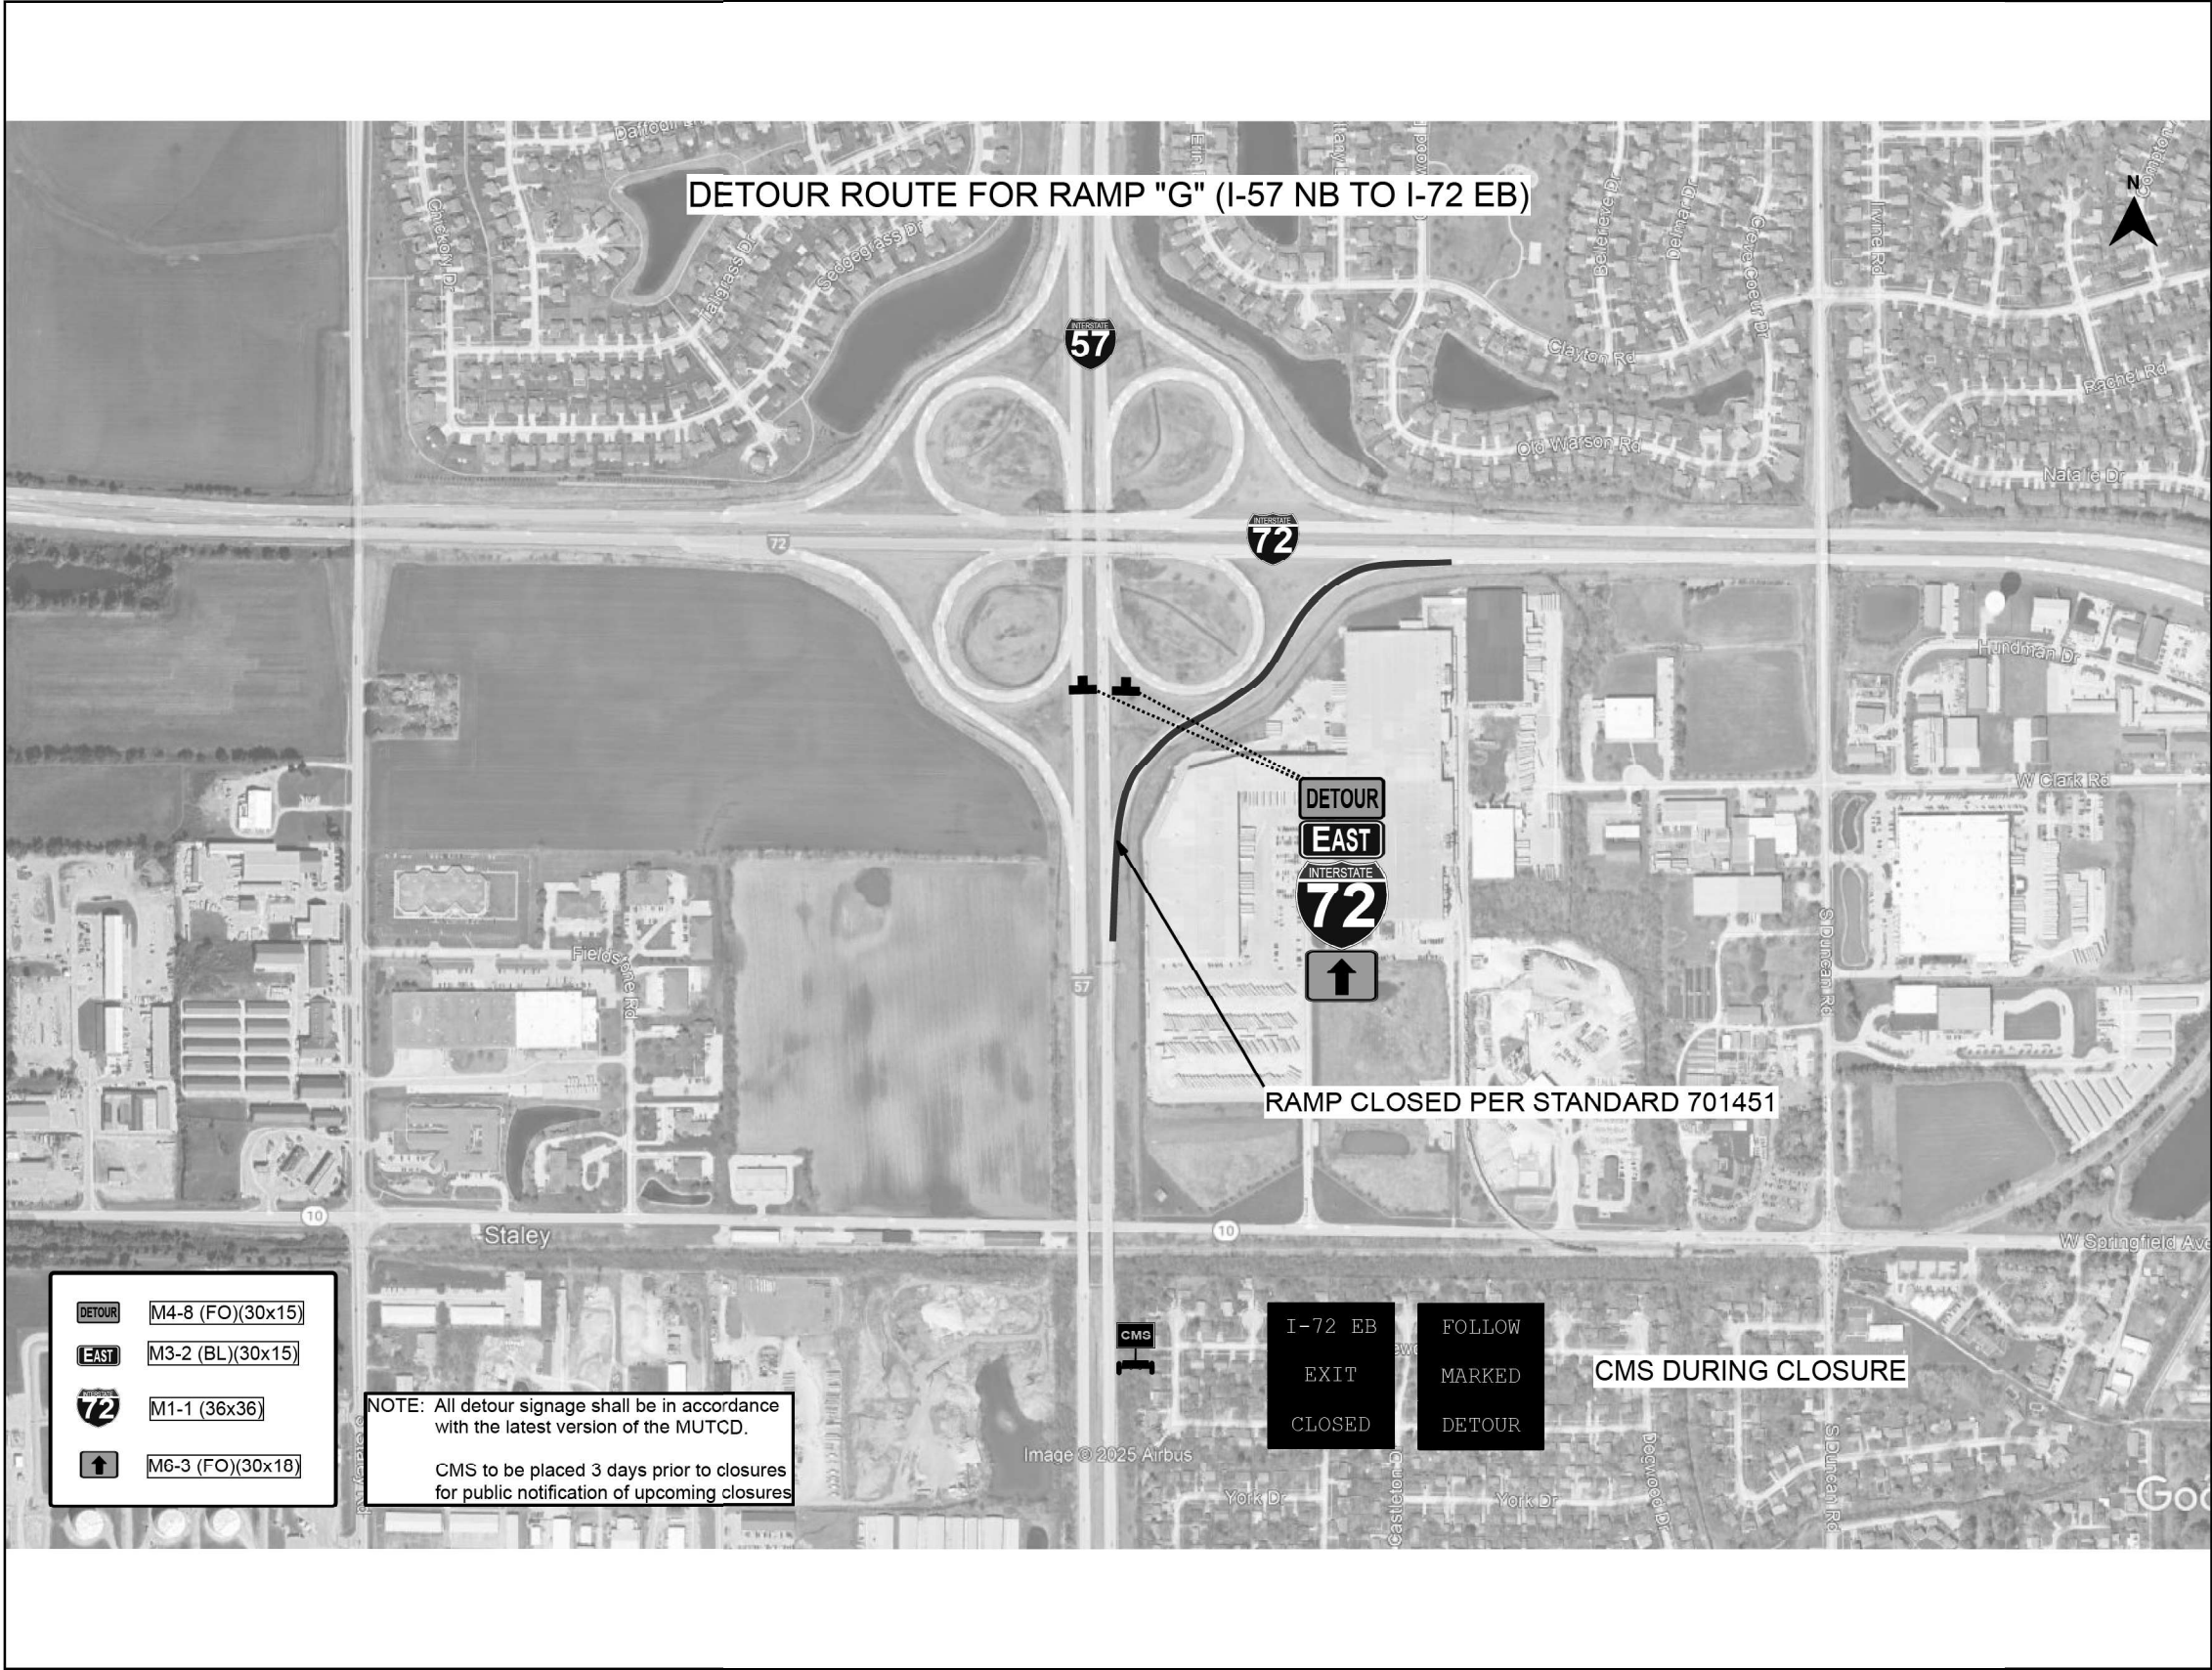

MODEL: Detour Map-9 (Sheet)
FILE NAME: c:\p\work\p\person\1053076D570H54-sh-Detail-Detour Maps.dgn


USER NAME = Tyler.Pierson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/24/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


DETOUR MAP
RAMP G

SCALE: SHEET 9 OF 12 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33.33)PP	CHAMPAIGN	20	17
CONTRACT NO. 70H54				
ILLINOIS FED. AID PROJECT				

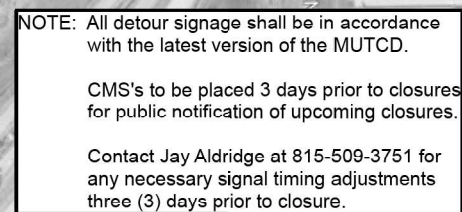

USER NAME = Tyler.Pterson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETOUR MAP RAMP G				F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -						57	(10-33,33)PP	CHAMPAIGN	20	18
	CHECKED -	REVISED -		CONTRACT NO. 70H54								
PLOT DATE = 1/24/2025	DATE -	REVISED -		SCALE:	SHEET 10	OF 12	SHEETS	STA.	TO STA.			
								ILLINOIS FED.AID PROJECT				



DETOUR MAP
RAMP H

SCALE:	SHEET 11	OF 12	SHEETS	STA.	TO STA.
--------	----------	-------	--------	------	---------

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(10-33,33)PP	CHAMPAIGN	20	19
		CONTRACT NO. 70H54		
		ILLINOIS	FED. AID PROJECT	



**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**DETOUR MAP
RAMP H**

USER NAME = Tyler.Pterson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETOUR MAP RAMP H				F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -						57	(10-33.33)PP	CHAMPAIGN	20	20
	CHECKED -	REVISED -						CONTRACT NO. 70H54				
PLOT DATE = 1/24/2025	DATE -	REVISED -		SCALE: SHEET 12 OF 12 SHEETS STA. TO STA.				ILLINOIS FED. AID PROJECT				