

For anchor rod size and placement, see Support Frame Detail Sheet.


** Anchor rod shall be ground or filed to bright metal at clamp and cable connection location. *** A normal surface finish followed by a Bridge Seat Sealer application will be required on concrete surfaces above the lowest elevation 6" below finished ground line. Cost included in Rebuild Concrete Foundation for Overhead Sign Structure.




BILL OF MATERIAL EACH FOUNDATION

| Bar | Number | Size | Length | Shape |
|-------|----------------------|-------|----------|-------|
| u(E) | 8 | #4 | 14'-6'' | |
| | | Unit | Quantity | |
| Conci | ete Remov | al . | - Cu Yd | 2.2 |
| | orcement i Coated | Pound | 80 | |
| Concr | rete Struct | Cu Yd | - 2.2 | |

Quantities listed here will not be measured for payment, but shall be included with the unit bid price per Each for Rebuild Concrete Foundation for Overhead Sign Structure.

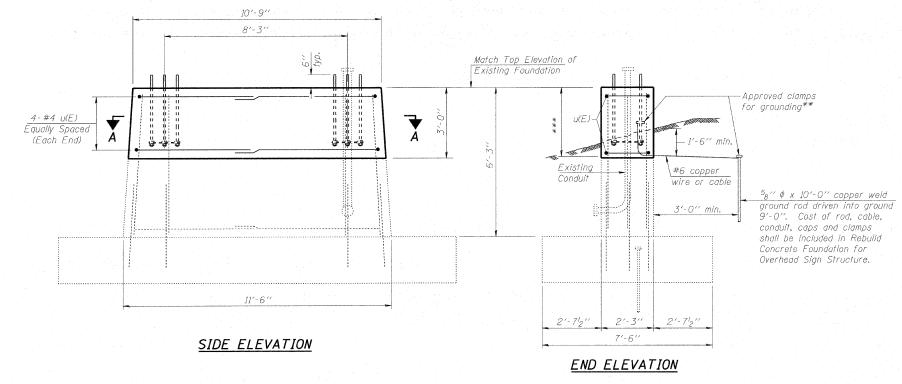

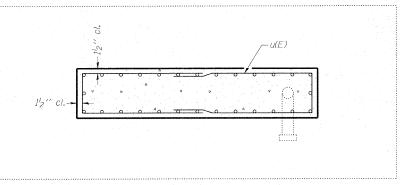

6'-3"

BAR u(E)

SECTION A-A

| FILE NAME = | USER NAME = | DESIGNED - | BLB | REVISED - | | REBUILD CONCRETE FOUNDATION | RTE SECTION COUNTY TOTAL SHEET NO. |
|-------------|--------------|------------|-----|-----------|------------------------------|-----------------------------|---|
| | | CHECKED - | BAB | REVISED - | STATE OF ILLINOIS | DETAILS | 55 2010-114-SG WILL 115 105 |
| | PLOT SCALE = | DRAWN - | BCD | REVISED - | OVERHEAD SIGN REHABILITATION | | CONTRACT NO. 60M48 |
| | PLOT DATE = | CHECKED - | BLB | REVIȘED - | | SHEET NO. 7 OF 11 SHEETS | FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT |
| | | | | | | | |

. UESUN FIRMNDIOTATIVATNET NEUT ZZAZA,BIT
...NNOZINEUTSNBAW,HBI
415545 PM ISMACKARANILDOTNIQOISS - DI VARVARNWOZINSB

DEPYRIGHT © 2010, BY BAXTER & WCODMAN, INC.
STATE OF ALLINGS - PROFESSIONAL DESIGN FIRM ...\DiofKINES NO. - IB4-001201 - EXPRES 47.30201 ...\WQZ
5660cd 47.47_201 ...