
## WITH INTERSECTION TRAFFIC SIGNALS

## WITH NEAR-SIDE TRAFFIC SIGNALS

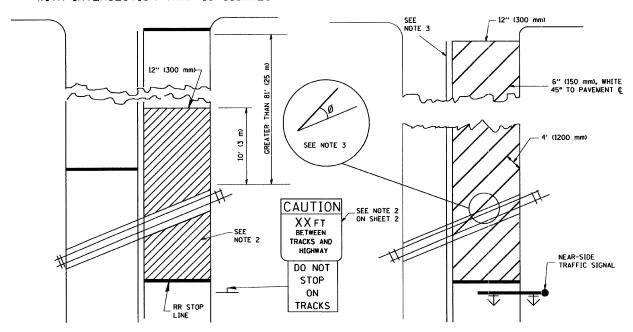


# NOTES:

- PAYEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS
  WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED. THE PAVEMENT MARKINGS EXTENDS TO THE INTERSECTION.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL STRIPES AND THE TRACK (Ø) WOULD BE LESS THAN APPROXIMATELY 20°, THE STRIPES SHOULD BE SLOPED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

# WITH NONSIGNALIZED INTERSECTION

81' (25 m) OR LESS TO CLOSEST RAIL

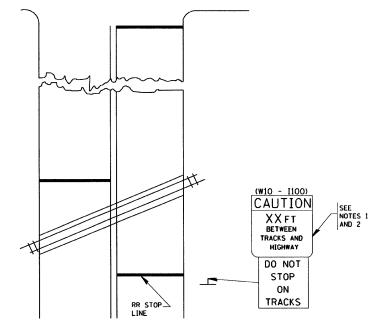

#### NOTE :

- DISTANCE TO BE SHOWN ON SIGN WEASURED FROM A POINT 6 FEET (1.8 m) FROM THE RAIL CLOSEST TO THE INTERSECTION TO THE STOP LINE OR CROSSWALK, WHICHEVER IS CLOSEST, ROUNDED DOWN TO THE NEAREST 5 FEET (1.5 m). WHERE THERE IS NO STOP LINE, WEASURE TO POINT WHERE THE DRIVER HAS A VIEW OF APPROACHING TRAFFIC.
- 2. THE CLEARANCE SIGN IS ALSO TO BE USED AS AN INTERIM MEASURE AT LOCATIONS WITH INTERCONNECTED INTERSECTION TRAFFIC SIGNALS WHERE IT IS PLANNED TO CHANGE THEM TO MEAR-SIDE SIGNALS AT A FUTURE TIME. IN THIS CASE, THE DISTANCE TO BE SHOWN ON THE SIGN IS MEASURED FROM THE EDGE OF THE STRIPED-OUT AREA INSTEAD OF G-FEET FROM THE RAIL. THE SIGN IS TO BE REMOVED WHEN THE MEAR-SIDE SIGNALS ARE INSTALDED AND THE PAVEMENT MARKINGS EXTEND TO THE INTERSECTION.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
UNLESS OTHERWISE SHOWN. \*12

\*1284 & 2743

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SUPPLEMENTAL SIGNING AND PAVEMENT MARKING TREATMENT FOR RAILROAD CROSSINGS					F.A.U. RTÉ.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
					*	2011-017-RS	COOK	16	16
						TC-23	CONTRACT	NO. 6	0P10
SCALE: NONE	SHEET NO. 1 OF 1	SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				