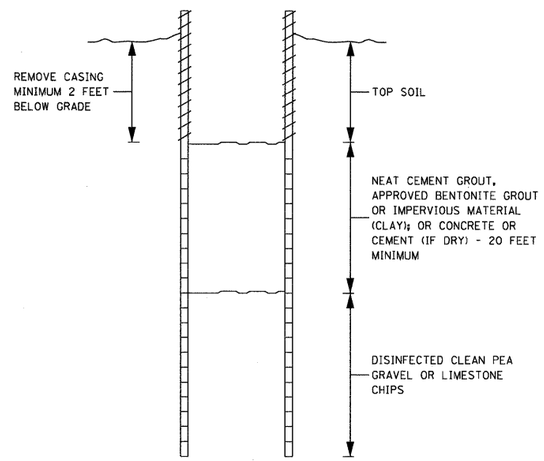

NOTE: ABANDONED DUG AND BORED WELLS CAN ALSO BE SEALED WITH ALTERNATING LAYERS OF APPROVED BENTONITE GROUT AND AGRICULTURAL LIME (LIMESTONE FINES) OR COMPLETELY FILLING WITH CONCRETE, CEMENT GROUT, OR IMPERVIOUS MATERIAL SUCH AS CLAY.

ILLUSTRATION - SEALING AN ABANDONED DUG OR BORED WELL

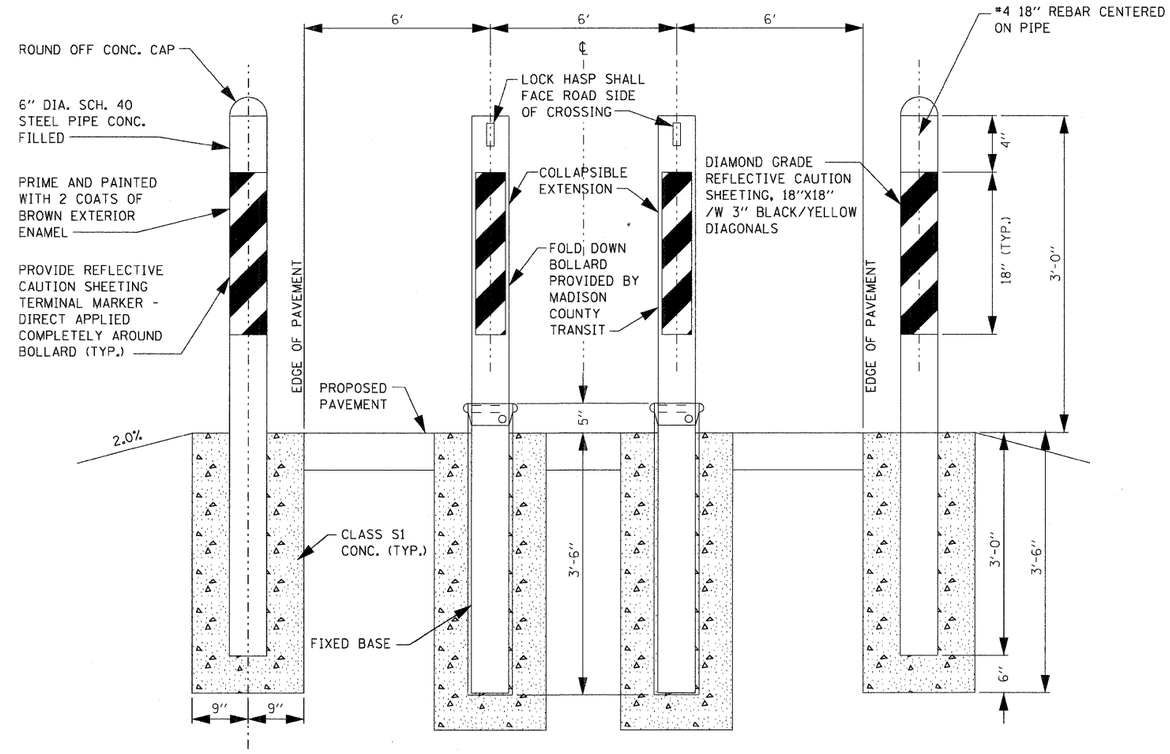

BOLLARD DETAIL

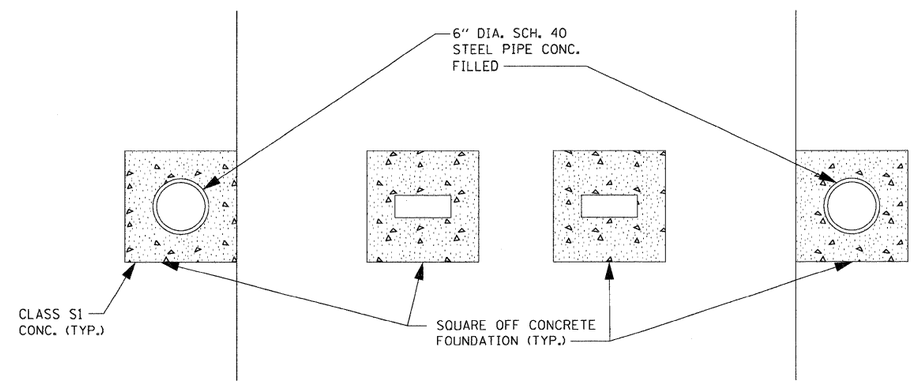

BOLLARD PLAN VIEW

FILE NAME = 0876A91-Sht-Levee-Details01.dgn	USER NAME = mmcconachie	DESIGNED - CLS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LEVEE DETAILS PROPOSED RELOCATED LEVEE	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - MAM	REVISED -			270	60-1B-1	MADISON	712	87
	PLOT SCALE = 20.0000 ' / IN.	CHECKED - CLS	REVISED -					CONTRACT NO. 76A91		
	PLOT DATE = 3/16/2011	DATE - 3/18/2011	REVISED -		SCALE: N/A / SHEET NO. 1 OF 1 SHEETS / STA. N/A / TO STA. N/A			ILLINOIS FED. AID PROJECT		