


METAL SHELL PILE TABLE


Designation and outside diameter	Wall thickness <i>t</i>	Weight per foot (Lbs./ft.)	Inside volume (yd. ³ /ft.)
PP12	0.179"	22.60	0.0274
PP12	0.250"	31.37	0.0267
PP14	0.250"	36.71	0.0368
PP14	0.312"	45.61	0.0361

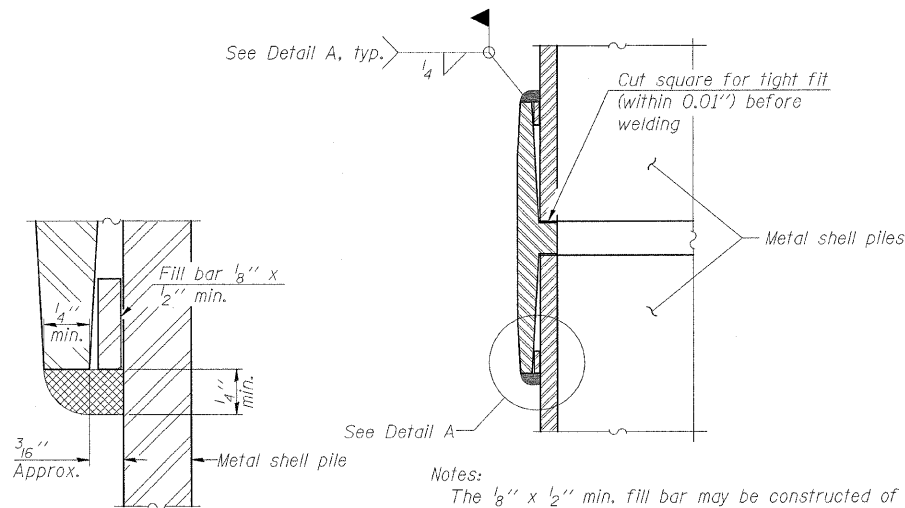


DETAIL A

Notes:
 The 1/8" x 1/2" min. fill bar may be constructed of 2 bars with a 1/8" max. gap between them.
 Pile segments shall be driven to solid contact with splicer before welding.

WELDED COMMERCIAL SPLICE

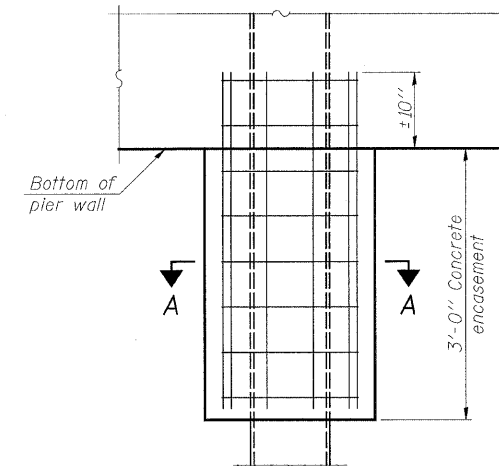


ELEVATION

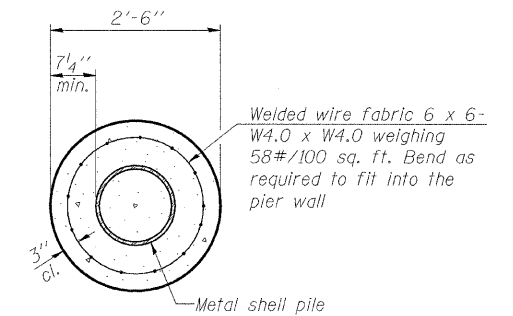


SECTION A-A

Note: Forms for encasement may be omitted when soil conditions permit.


CONCRETE ENCASEMENT AT PIERS

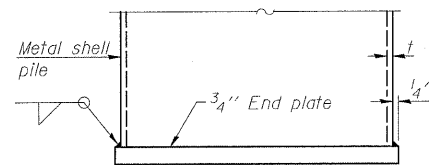

END PLATE ATTACHMENT

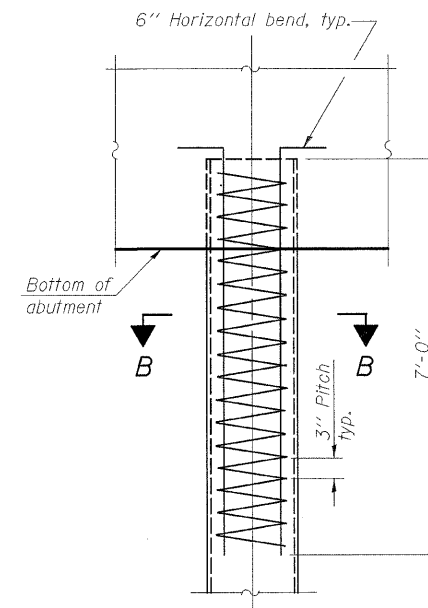


ELEVATION



SECTION B-B


METAL SHELL REINFORCEMENT AT ABUTMENTS

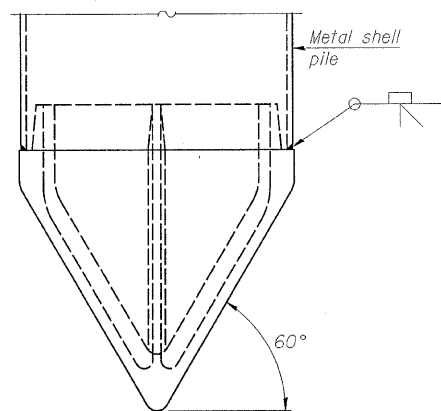

METAL SHELL PILE SHOE ATTACHMENT

(See Note A)

Note A:
 When called for on the plans, the Contractor shall furnish metal shell pile shoes consisting of a single piece conical pile point as shown. The pile shoes shall be cast in one piece steel according to either ASTM A 148 Grade 90-60 or AASHTO M 103 Grade 65-35 and shall provide full bearing over the full circumference of the metal shell pile. The pile shoe shall have tapered leads to assure proper alignment and fitting and shall be secured to the pile with a circumferential weld.

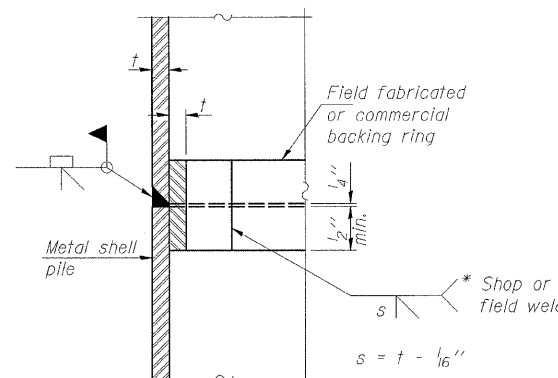

COMPLETE PENETRATION WELD SPLICE

* Field fabricated backing ring may be made from pile shell by removing segment to allow reducing circumference and vertically rejoin with partial joint penetration weld.

NOTE:

The metal shell piles shall be according to ASTM A 252 Grade 3.

METAL SHELL PILE DETAILS
 TR 257 (N. 1600 AVE.) OVER KING CREEK
 STA. 20+10 (S.N. 006-4247)
 SECTION 07-17137-00-BR
 MINERAL ROAD DISTRICT
 BUREAU COUNTY
 WHA # 1115D08

STRUCTURAL SHEET NO. 8 OF 9 SHEETS	T.R. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	257	07-17137-00-BR	BUREAU	27	19
CONTRACT NO. 87381					
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT BROS-0011(071)					