

NEW SLAB

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (I) I" x 7" 'x "W" steel P to the top layer of couplers with $2^{-5}8'' \neq bolts$ screwed to coupler at approximate ℓ of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) I" x 7" x "W" steel P to the concrete slab or concrete wearing surface with 2-58" ♥ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The I" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM

EXISTING SLAB

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place ofter stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

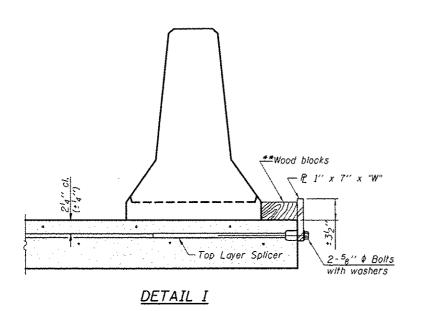

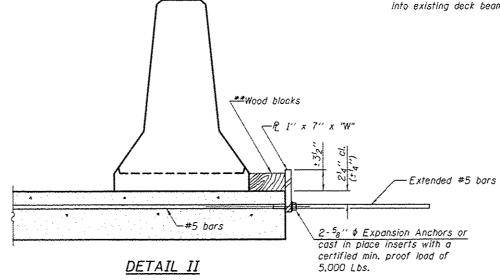

EXISTING DECK BEAM

"W" Top bars Detall I spacing Detail II -€ ⁷8" Ø Holes --*€ 1" x 12" Notch

STEEL RETAINER & 1" x 7" x "W" * Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

R-27

7-1-10 DESIGNED - ATH AUGUST 18, 2014 EXAMINED DATE CHECKED . VHV DRAWN - Kyle M. Steffen REVISED PASSED CHECKED - ATH VHV REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION SN 009-0001 SHEET NO. 14 OF 14 SHEETS

SECTION COUNTY 310 CASS 19 19 (86)8JR CONTRACT NO. 72H29 ILLINOIS FED. AID PROJECT