


AT ABUTMENTS

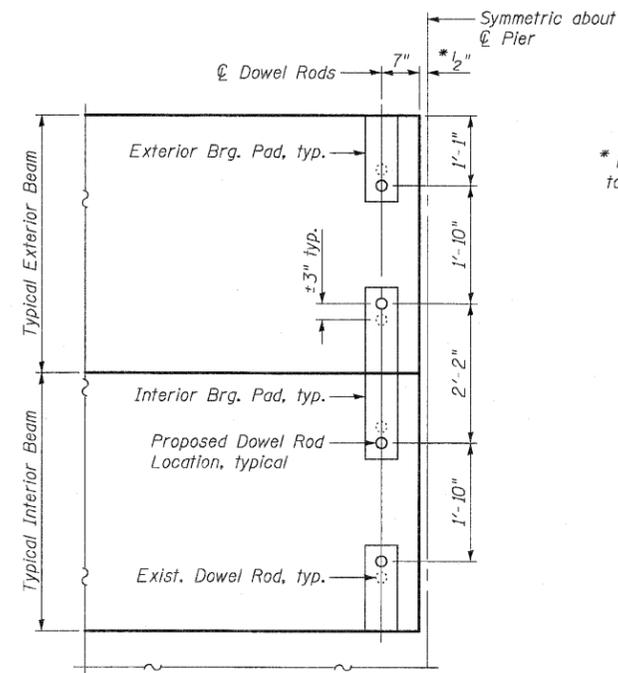

AT PIERS

\* Dimension may vary to accommodate tolerances in beam length.

DOWEL ROD LOCATION DETAIL

Notes:  
Burn existing Dowel Rods Flush with top of abutment or pier cap.  
Grind existing dowel rods smooth and seal with epoxy.  
Cost is included with Removal of Existing Superstructures.  
See Sheet 4 of 10 for Bearing Pad Details.

DOWEL ROD LOCATION DETAIL  
STRUCTURE NO. 077-0035

	PROJECT NO. 07056-S	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	SCALE	2936	16BR-1	PULASKI	68	53
	DATE 4/27/10	CONTRACT NO. 78071				
DESIGN BY CME	SHEET NO. 8	FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		
DRAWN BY CFC	10 SHEETS					
CHECKED BY CME/MCB						