SPECIAL SIGN PANEL MESSAGES

SIGN CODE
D6-1 PC

SIGN CODE
W8-1 PC



SIGN CODE W1-10
(ADD ADDITIONAL SIDE ROAD)

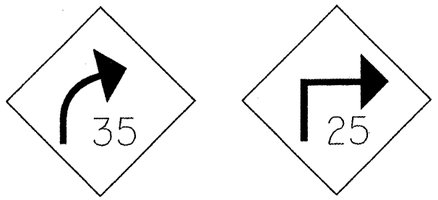

TYPICAL SIGN DESIGN
SIGN CODE W1-1a AND W1-2a
(CIRCLE AROUND SPEED NOT ALLOWED)



SIGN CODE
R5-1102



SIGN CODE
I-1107



SIGN CODE W21-111
(OUTSIDE DETAIL OF HINGED SIGN)



TYPICAL MESSAGE
SIGN CODE D3-1

GENERAL NOTES:

ALL SIGNS SHALL BE PLACED IN EXISTING LOCATIONS OR IN LOCATIONS SPECIFIED IN THE PLANS AS DIRECTED BY THE ENGINEER.
PROPOSED POST LENGTHS SHALL BE MODIFIED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.
ALL NEW SIGN PANELS SHALL INCLUDE THE YEAR OF MANUFACTURE AND THE INITIALS "PCHD" AT THE BOTTOM FACE OF EACH SIGN TO COMPLY WITH FEDERAL SIGN INVENTORY MANAGEMENT GUIDELINES.
EXISTING WEIGHT LIMIT SIGNS ON KICKAPOO CREEK ROAD ARE TO REMAIN IN PLACE AND ARE NOT PART OF THIS PROJECT.
SHOULDER WIDENING FOR TRAFFIC BARRIER TERMINALS SHALL NOT BE PAID FOR SEPARATELY, BUT SHALL BE CONSIDERED TO BE INCLUDED IN THE COST OF THE VARIOUS TRAFFIC BARRIER TERMINAL PAY ITEMS.

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAU 6576	09-00177-00-SP	PEORIA	33	2
FED. ROAD DIST. NO. 7	ILLINOIS	PROJECT: HSP 5093 (151)		
CONTRACT NO. 69561				

SUMMARY OF QUANTITIES

CODE NO.	ITEM	UNIT	QUANTITY	CONST. TYPE CODE	
63000003	STEEL PLATE BEAM GUARDRAIL, TYPE A, 9 FOOT POSTS	FOOT	2,628	2,628	
63000005	STEEL PLATE BEAM GUARDRAIL, TYPE B	FOOT	695	695	
63100045	TRAFFIC BARRIER TERMINAL, TYPE 2	EACH	1	1	
63100167	TRAFFIC BARRIER TERMINAL, TYPE 1 (SPECIAL) TANGENT	EACH	25	25	
63200710	STEEL PLATE BEAM GUARDRAIL REMOVAL, TYPE A	FOOT	633	633	
63304385	TRAFFIC BARRIER TERMINAL REMOVAL, TYPE 1	EACH	1	1	
63305100	TRAFFIC BARRIER TERMINAL REMOVAL, TYPE BLR 19-1	EACH	7	7	
67100100	MOBILIZATION	L. SUM	1	1	
70101700	TRAFFIC CONTROL AND PROTECTION	L. SUM	1	1	
72000100	SIGN PANEL, TYPE 1	SQ. FT.	1,688	1,688	
72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	4,908	4,908	
78200450	MONODIRECTIONAL GUARDRAIL REFLECTORS	EACH	77	77	
78201000	TERMINAL MARKER - DIRECT APPLIED	EACH	31	31	
LR631020	TRAFFIC BARRIER TERMINAL, TYPE 1	EACH	2	2	
X0326899	SOLAR POWERED FLASHING BEACON ASSEMBLY (COMPLETE)	EACH	13	13	
Z0007100	BRIDGE RAIL (SPECIAL)	FOOT	13	13	