

## WIDTH AS SHOWN IN THE PLANS SLOPE TO DRAIN 6" (150) (TYP.) 3" (75) 4" (100) R. (TYP.) (TYP.) VAR. 0 MORTAR FILLING AROUND DOWEL BARS (TYP.) #15 (#4) DEFORMED TIE BARS @ 36" (900) CTS. (TYP.) 6"(150) (TYP.) (350) EXISTING PAVEMENT PAVEMENT FABRIC SECTION A-A

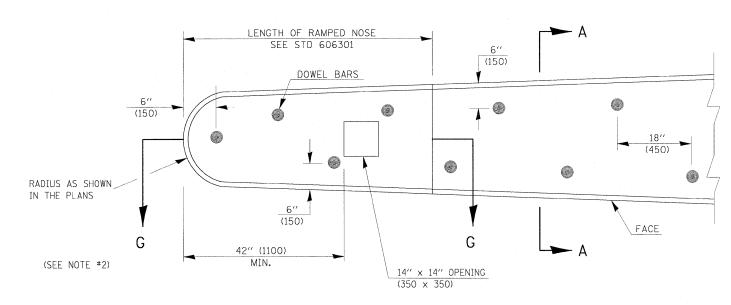

## PLAN OF MEDIAN

## GENERAL NOTES

- 1. THE GENERAL NOTES FOR STANDARD 606301 SHALL APPLY.
- 2. DOWEL BARS @ 36" (900) CTS. OR AS DIRECTED BY THE ENGINEER.
- 3. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ FOOT (m ) FOR CONCRETE MEDIAN, TYPE SM-6 (SM-15) (DOWELED), INCLUDING THE COST OF FURNISHING AND INSTALLING THE DOWEL BARS, MORTAR FILLING, PAVEMENT FABRIC AND THE REMOVAL AND DISPOSAL OF THE EXISTING PAVEMENT FOR THE  $14" \times 14"$  (350  $\times$  350) OPENING, IF REQUIRED, AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

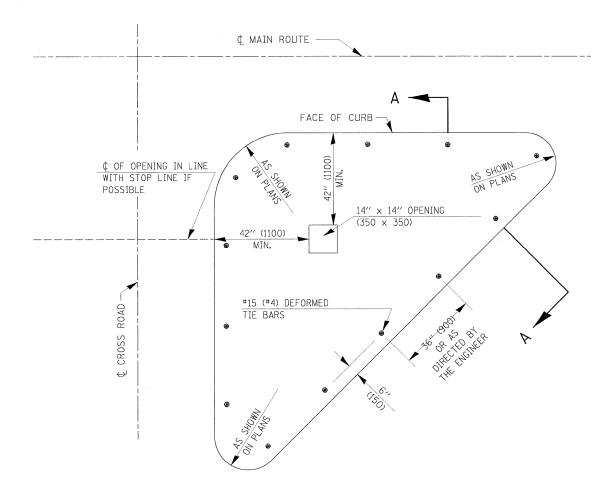

PLAN OF CORNER ISLAND

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DISTRICT 5	DETAIL	NO.	60622354
------------	--------	-----	----------

DESIGNED - DISTRICT STD SER NAME = \$USER\$ REVISED 11/06 \$FILEL\$ DRAWN REVISED CHECKED REVISED PLOT SCALE = #SCALE# 03/27/09 REVISED DATE LOT DATE = \*DATE\*

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

CONCRETE MEDIAN, TYPE SM-6 (SM-15) (DOWELED) SCALE: SHEET NO. OF SHEETS STA.

COUNTY TOTAL SHEETS NO. SECTION 06-00025-01-BT McLEAN 36 18 CONTRACT NO. 91410