HOT-MIX ASPHALT SHOULDER

HOT-MIX ASPHALT SHOULDER PAY WIDTH SEE TYPICAL SECTIONS -8" TOTAL SHOULDER THICKNESS -HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 #40603310 -100 (4) AGGREGATE BASE COURSE TYPE B (USE ONLY IF SHOULDER IS USED AS A RUN t = SEE TYPICAL SECTIONS FOR THICKNESS

GENERAL NOTES

THE HOT-MIX ASPHALT SHOULDER SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 482 EXCEPT THE TOP LIFT SHALL BE HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 #40603310. THE WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR HOT-MIX ASPHALT SURFACE COURSE. MIX "C", N50 #40603310 AND SQUARE YARD FOR HOT-MIX ASPHALT SHOULDERS OF THE THICKNESS SPECIFIED.

USE HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 #40603310. WHEN RESURFACING EXISTING HOT-MIX ASPHALT SHOULDERS. THE THICKNESS IS SHOWN ON THE TYPICAL SECTIONS. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR HOT-MIX ASPHALT SURFACE COURSE, MIX "C". N50 #40603310.

REMOVAL OF MATERIAL FOR PLACEMENT OF THE HOT-MIX ASPHALT SHOULDER TO BE PAID FOR IN UNITS FOR EXCAVATING AND GRADING EXISTING SHOULDERS OR IN CUBIC YARDS FOR EARTH EXCAVATION OR EARTH EXCAVATION WIDENING.

*4% WHEN MAINLINE IS ON TANGENT. FOR CROSS SLOPE ON SUPERELEVATION SECTION, SEE HIGHWAY STANDARD 482001 OR 482006.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS


REVISED - 11-01-07

REVISED - 2-22-06

HOT-MIX ASPHALT SHOULDER

23.4a

DELINEATOR AND POST ORIENTATION

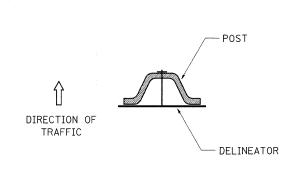

-Ф SECTION D-D --(-

DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHED AS SHOWN ABOVE.


ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 11-01-07

DELINEATOR AND POST ORIENTATION

37.4

TYPICAL BENCHING ON EXISTING EMBANKMENT

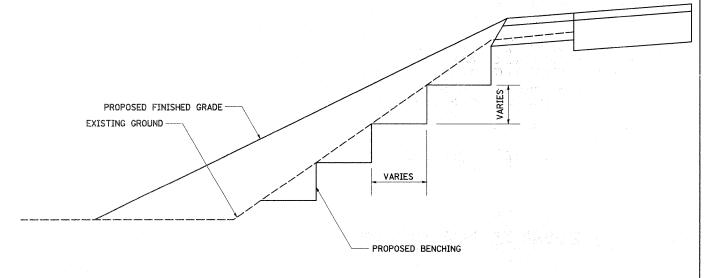

TREE REPLACEMENT SCHEDULE

CODE NUMBER	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	QUANTITY
A2006514	TREE, QUERCUS BICOLOR	SWAMP WHITE OAK	1-3/4"	EACH	4
A2005114	TREE, JUGLANS NIGRA	BLACK WALNUT	1-3/4"	EACH	4
₹					
Ĭ					
					-
					
					
					<u> </u>
			L	<u> </u>	<u></u>

MITIGATED TREES SHALL BE PLANTED ON THE JOBSITE. LAYOUT SHALL BE PERFORMED BY THE DISTRICT LANDSCAPE ARCHITECT. MULCH SHALL BE HARDWOOD WOOD CHIPS, 4 INCHES THICK WITH WEED BARRIER FABRIC.

FOR QUESTIONS PLEASE CALL (815)-284-5400.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED

			OTTLEMISE	. 1407				
REVISED - 8-10-05				F.A.P.	SECTION	COUNTY	TOTAL	SHEET NO.
REVISED -	REGION 2 / DISTRICT 2	STANDARD		650	104T-2	JO DAVIESS	53	31
REVISED -					2011	CONTRACT	NO. F	64C79
REVISED -	SCALE: 50 0000 // IN SHEET NO 1 OF 1 SHEETS	STA.	TO STA.	EED BO	AD DIST NO THE THOIS SED A			

TYPICAL BENCHING ON EXISTING EMBANKMENT

50.4PLOT DATE = Mon Sep 21 11:05:10 2009

TREE REPLACEMENT SCHEDULE