
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

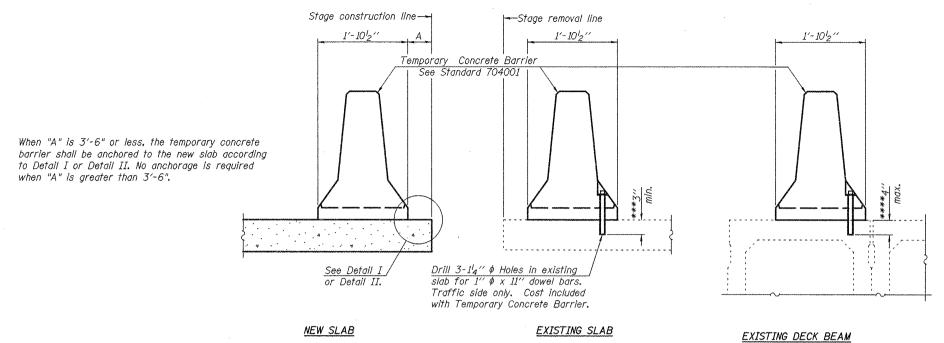

NOTES

Detail I - With Bar Splicer or Couplers:
Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1"x7"x 10" steel 12 to the concrete slab or concrete wearing surface with 2-5g" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM


are omitted, the concrete barrier shall be in direct contact

with the steel retainer plate.

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

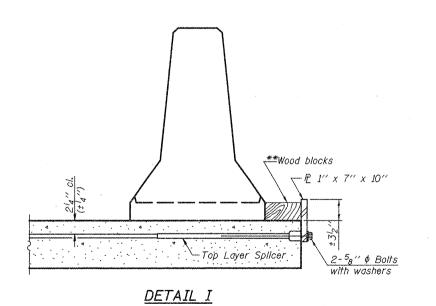

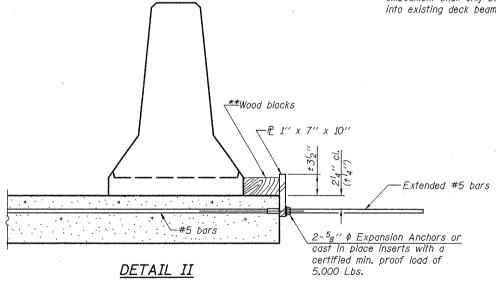



Top bars spacing Q 78" Ø Holes *£ 1" x 1'2" Notch

STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 055-0079

			FK•M vil Engine			Ī	31 Salem Place Suite 225 ew Heights, IL 62208	Phone Fax	618 618	-206-425 -206-425
	SHEET NO. 5	F.A.P. RTE.		SEC ⁻	TION		COUNTY	TOT. SHEE	AL TS	SHEE'
		685	37BR-1			MCDONOUGH	138		60	
21 SHEETS							CONTRACT	NO.	68	352
		FED. RO	AD DIST.	NO.	ILLINOIS	FED. A	ID PROJECT			

[
DESIGNED	SEC		
CHECKED	CDL	~~~~	
DRAWN	SEC		

CHECKED CDL R-27

10-1-08