

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

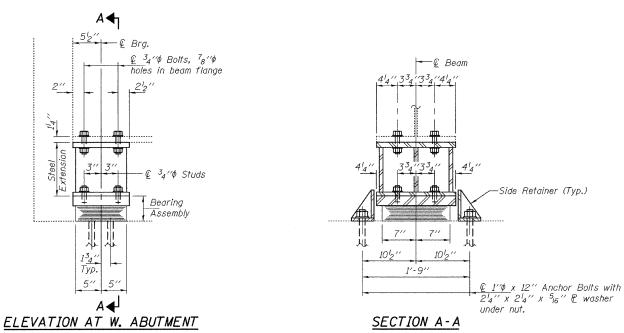

TYPE I ELASTOMERIC EXP. BRG.

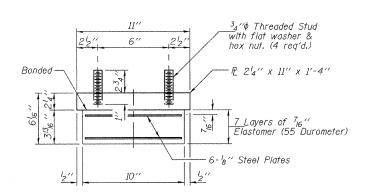

BEARING ASSEMBLY


Shim plates shall not be placed under Bearing Assembly.

DESIGNED


CHECKED


CHECKED

TYI/REPS 11-01-2006



OCTOBER 30, 2009_
EXAMINED & Carl Prayry
PASSED Ralph E. Curlesan
ENGINEER OF BRIDGES AND STRUCTURES





SIDE RETAINER

Equivalent rolled angle with stiffeners will be allowed in lieu of welded plates.


BEAM REACTIONS

R₽	(K)	57.2
R4	(K)	42.4
Imp.	(K)	8.9
R (Total)	(K)	108.5


Notes:
Diaphragm removal and reinstallation may be required to facilitate drilling holes. Cost included with Furnishing and Erecting Structural Steel.
New steel extensions, shim plates and connection bolts are included with Furnishing and Erecting Structural Steel. Prior to ordering any material, the Contractor shall verify in the field all bearing height and shim thickness dimensions.
Min. Jack capacity = 65 Tons.
Anchor bolts shall be ASTM F1554 all-thread (or an Engineer-approved alternate material) of the grade(s) and diameter(s) specified. ASTM A307 Grade C anchor bolts may be used in lieu of ASTM F1554

anchor bolts may be used in lieu of ASTM F1554 Grade 36 (Fy=36ksi). The corresponding specified grade of AASHTO M314 anchor bolts may be used in lieu of ASTM F1554.


Drilled and set anchor bolts shall be installed according to Article 521.06 of the Standard Specifications.
Side retainers shall be included in the cost of Elastomeric Bearing Assembly, Type I.

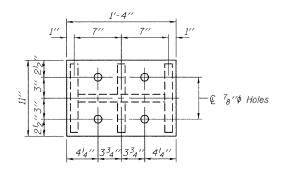

PLAN TOP AND BOTTOM PLATE



SECTION B-B



STEEL EXTENSION DETAIL

Existing bearing assembly

Burn existing anchor bolts flush with existing concrete surface. Grind existing anchor bolts smooth and seal with epoxy.

EXISTING BEARING REMOVAL DETAIL

Cost included with Jack and Remove Existing Bearings.

BILL OF MATERIAL

Item	Unit	Total
Elastomeric Bearing Assembly Type I	Each	12
Jack and Remove Existing Bearings	Each	12
Furnishing and Erecting Structural Steel	Pound	2380
Anchor Bolt 1''Þ	Each	48

WEST ABUTMENT BEARING REPLACEMENT DETAILS FAI RT. 72 OVER FRIENDS CREEK SN 058-0093 & 0094

SHEET NO. 16	F.A.I. RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
3/122/ 140:10	72	66(B,HVB,HB-1)BR		MACON	83	43
17 SHEETS				CONTRACT	NO. 74	343
	FED. RO	DAD DIST. NO.	ILLINOIS FED.	AID PROJECT		