

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.R. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
662	3-1DR	SANGAMON	6	1
		ILLINOIS	CONTRACT NO. 72634	

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED IMPROVEMENTS


FAP 662 (IL 4/VETERANS PKWY)
SECTION: 3-1DR
PROJECT: STATE
DRAINAGE
SANGAMON CO.

C-96-056-25

R 5 N



PROJECT LOCATION
STA. 444+90.00

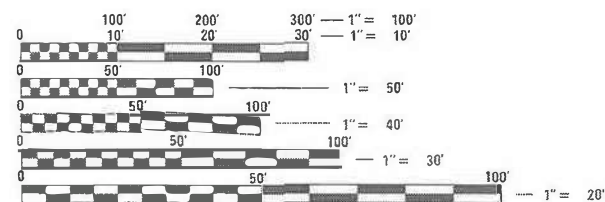


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER : MIKE HAMBY - (217)524-7765
PROJECT MANAGER : TIM SHARP - (217)524-9160

CONTRACT NO. 72634

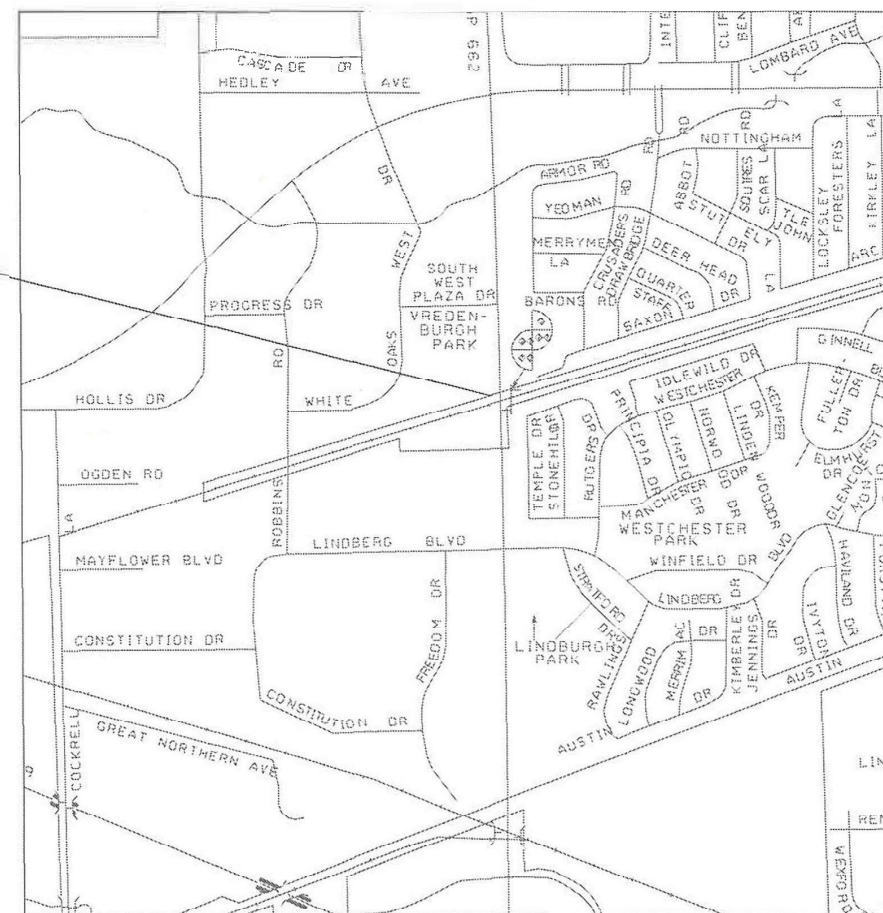

D-96-022-25



LOCATION OF SECTION INDICATED THUS: - [Red Rectangle] -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 3-26 20 25
Pam Rensing REGIONAL ENGINEER
SVB
May 9 2025
See Etk ENGINEER OF DESIGN AND ENVIRONMENT
May 9 2025
Harry DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1.	COVER SHEET
2.	INDEX OF SHEETS,STANDARDS,GENERAL NOTES & SIGNATURE
3.	SUMMARY OF QUANTITIES
4.	PROJECT LOCATION MAP
5.	SCHEDULES

STANDARDS

STANDARD NO.	DESCRIPTION
542201-02	REINFORCED CONCRETE END SECTIONS FOR PIPE CULVERTS 15"-36" DIAMETER SKEWED WITH ROADWAY
701101-05	OFF-RD OPERATIONS, MULTILANE 15' (4.5m) TO 24" (600mm) FROM PAVEMENT EDGE
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' (4.5m) AWAY
701901-10	TRAFFIC CONTROL DEVICES


NOTES:

CAST-IN-PLACE END SECTION IS AT A 50° SKEW TO MATCH EXISTING END SECTIONS ON THIS PROJECT.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
DISTRICT 6

EXAMINED March 28, 2025

ENGINEER OF OPERATIONS

EXAMINED March 28, 2025

ENGINEER OF PROJECT IMPLEMENTATION

EXAMINED March 28, 2025

ENGINEER OF PROGRAM DEVELOPMENT


CODE NO.	ITEM	UNIT	TOTAL QUANTITY	0-02179-6028
				100% STATE
				SANGAMON
				ROADWAY
				0004
				URBAN
50105220	PIPE CULVERT REMOVAL	FOOT	130	130
54215436	CAST-IN-PLACE REINFORCED CONCRETE END SECTION, 36"	EACH	1	1
542D0241	PIPE CULVERTS, CLASS D, TYPE 1 36"	FOOT	130	130
67100100	MOBILIZATION	L SUM	1	1
X5430236	CURED-IN-PLACE PIPE LINER, 36"	FOOT	294	294

PROJECT LOCATION



FILE NAME : p:\1\dot-pw.bentley.com\PW\DOT\Documents\IDOT Offices\District 6\ORD Projects\0672630\RAW\Note\CAOsheets\72634-sht-4-location	USER NAME : Timothy.Sharp	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LOCATION MAP		F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		PLotted SCALE : *SCALE*	CHECKED -				662	3-IDR	SANGAMON	6	4
Default	PLOT DATE : 3/26/2025	DATE -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.		CONTRACT NO. 72634				
							ILLINOIS FED. AID PROJECT				

Location Number	STA.	Location	Location Description	COUNTY	Pipe Type	36" PIPE LIN. FT.
1	444+62.50	LT	Under Wabash Bike Trail	SANGAMON	CMP	146
2	445+18.24	RT	Under Wabash Bike Trail	SANGAMON	CMP	148
TOTAL LIN. FT.:						294

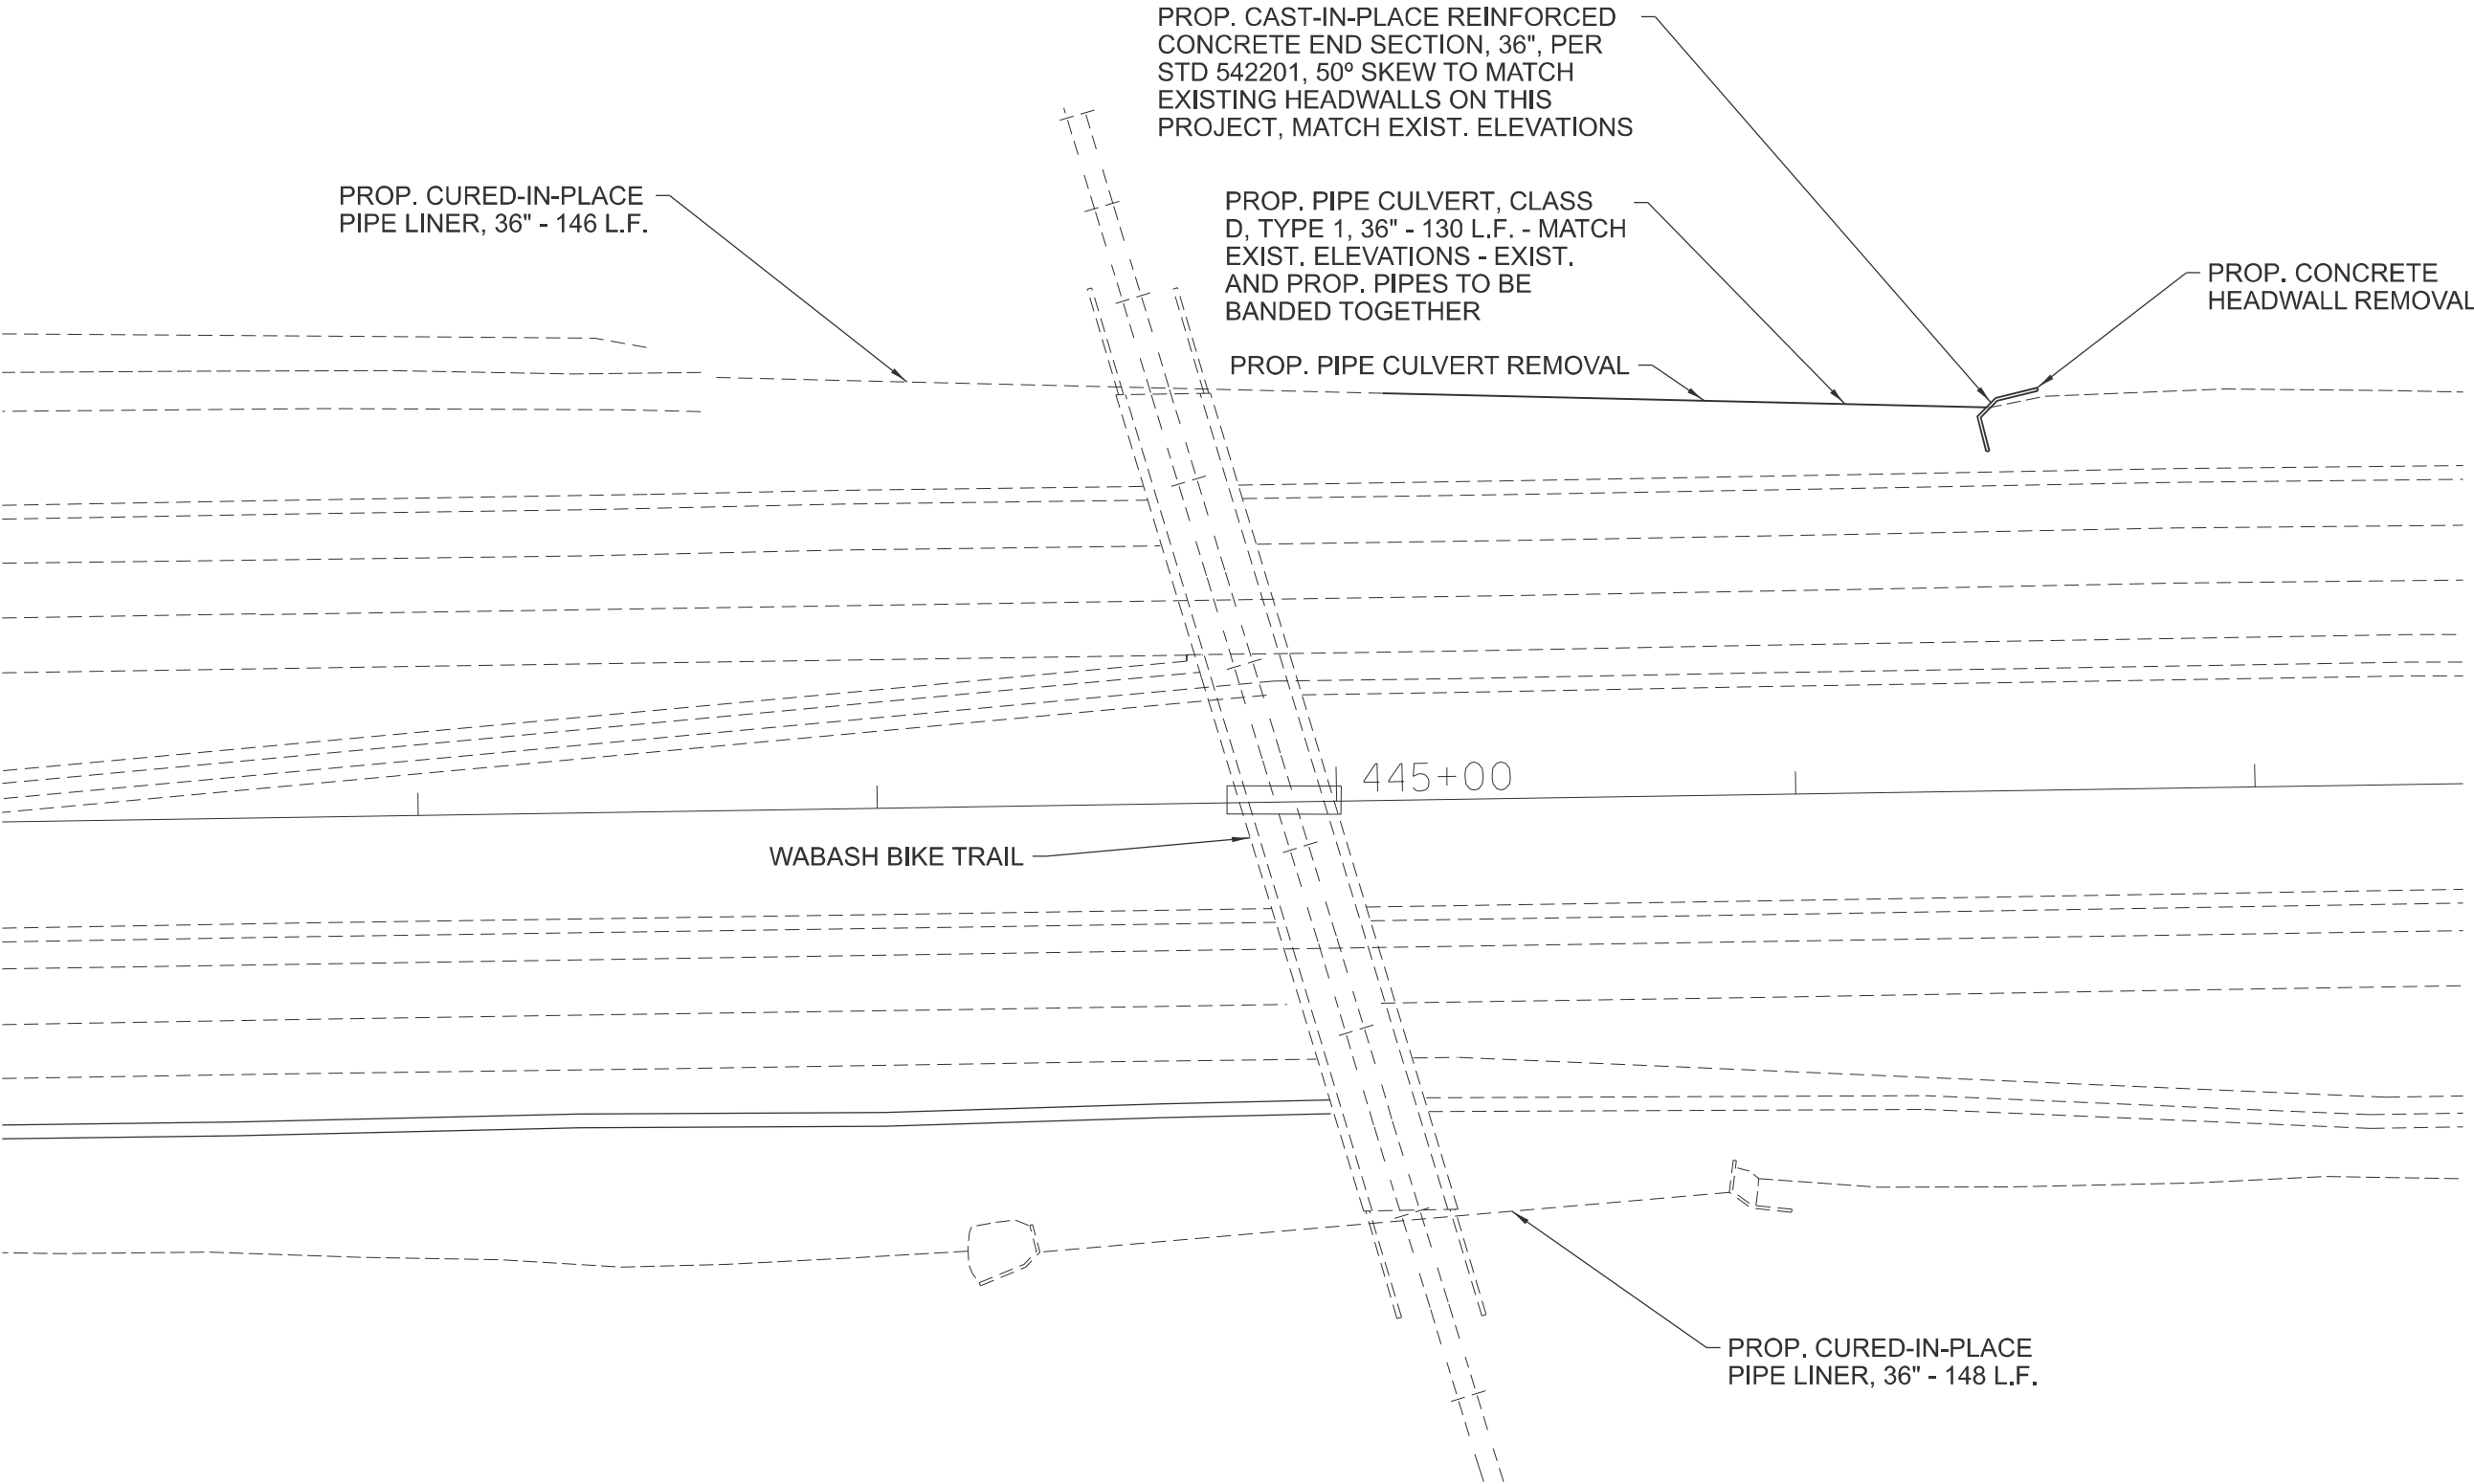

FILE NAME : p:\1\1dot-pw.bentley.com\PW\DOT\Documents\IDOT Offices\District 6\ORD Projects\0672630\Drawings\72634-sht-6-13-plan.dwg	USER NAME : Timothy.Sharp		DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PLAN			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE : \$SCALE\$		CHECKED -	REVISED -					662	3-IDR	SANGAMON	6	6
	PLOT DATE : 3/26/2025		DATE -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.			CONTRACT NO. 72634				
									ILLINOIS FED. AID PROJECT				