


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	1
		ILLINOIS	CONTRACT NO. 72942	



D-96-041-25

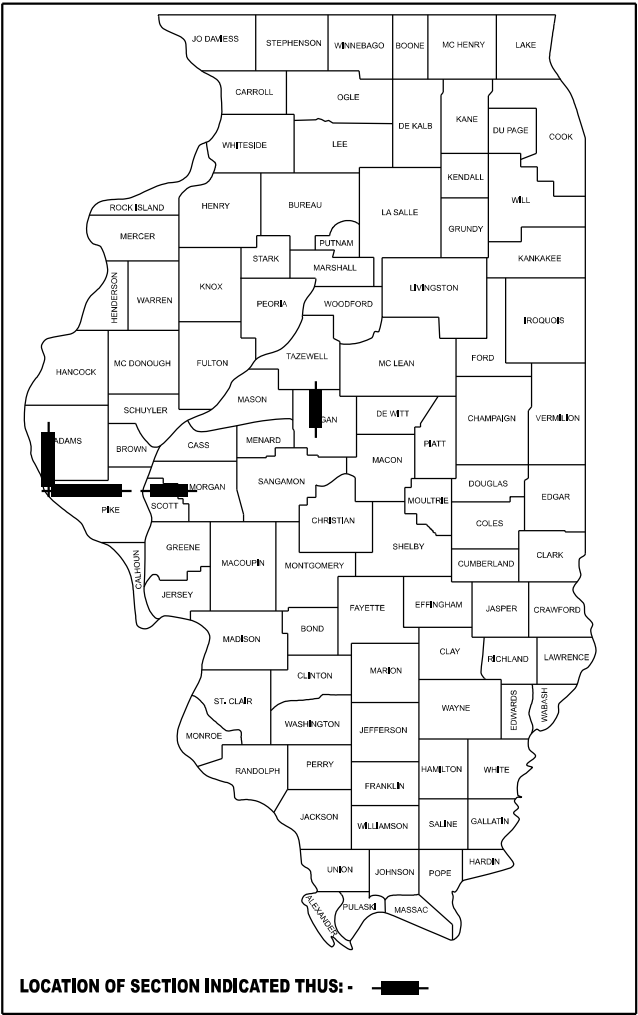

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION D6 BRIDGE MISC 2025
PROJECT (STATE ONLY)
BRIDGE ABUTMENT REPAIRS
VARIOUS COUNTIES
C-96-075-25

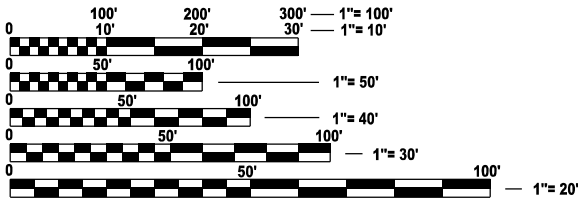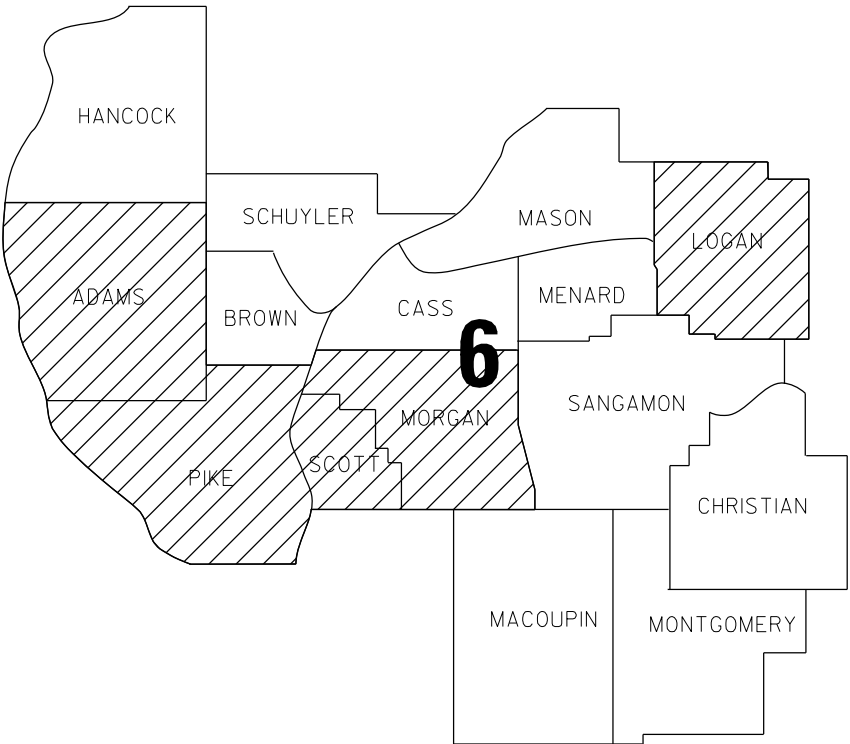

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: BRANDON DUDLEY - (217) 785-9290
PROJECT MANAGER

CONTRACT NO. 72942

GROSS LENGTH = x.xx FT. = x.xxx MILE
NET LENGTH = x.xx FT. = x.xxx MILE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 18, 2025
Lora Ramsey
REGIONAL ENGINEER

May 9, 2025
Scott E. Etk
ENGINEER OF DESIGN AND ENVIRONMENT

May 9, 2025
5
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

- 1
- COVER SHEET
- 2
- INDEX, STANDARDS, GENERAL NOTES, & SIGNATURES
- 3
- SUMMARY OF QUANTITIES
- 4-5
- LOCATION MAPS
- 6-7
- BRIDGE PLANS

HIGHWAY STANDARDS

- 000001-08
- 001001-01
- 001006
- 701101-05
- 701106-02
- 701901-10

GENERAL NOTES:

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
DISTRICT 6

EXAMINED

February 24,

20

25




ENGINEER OF OPERATIONS

EXAMINED

March 17,

20

25



ENGINEER OF PROJECT IMPLEMENTATION

EXAMINED

March 17,

20

25



ENGINEER OF PROGRAM DEVELOPMENT

REV - MS

MODEL: index [Sheet]
FILE NAME: c:\pw\work\pwid\dudley\mtd108746\72942 plansheet.dgn


	USER NAME = brandon.dudley	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, ENERAL NOTES, & SIGNATURES			F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	2
		CHECKED -	REVISED -					CONTRACT NO. 72942				
	PLOTDATE = 2/20/2025	DATE -	REVISED -					ILLINOIS FED. AID PROJECT				
				SCALE:			SHEET 1	OF 1	SHEETS	STA.	TO STA.	

MODEL: SOQ [Sheet]
FILE NAME: c:\pw_work\pwidth\dudleyb\md1087464\72942 plansheet.dgn

[illegible]

	USER NAME = brandon.dudley	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES					F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -							VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	3
		CHECKED -	REVISED -		CONTRACT NO. 72942									
	PLOT DATE = 2/20/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.				

MODEL: maps [Sheet]
FILE NAME: c:\p\work\pwork\dudley\cml\108746\172942_plansheet.dgn

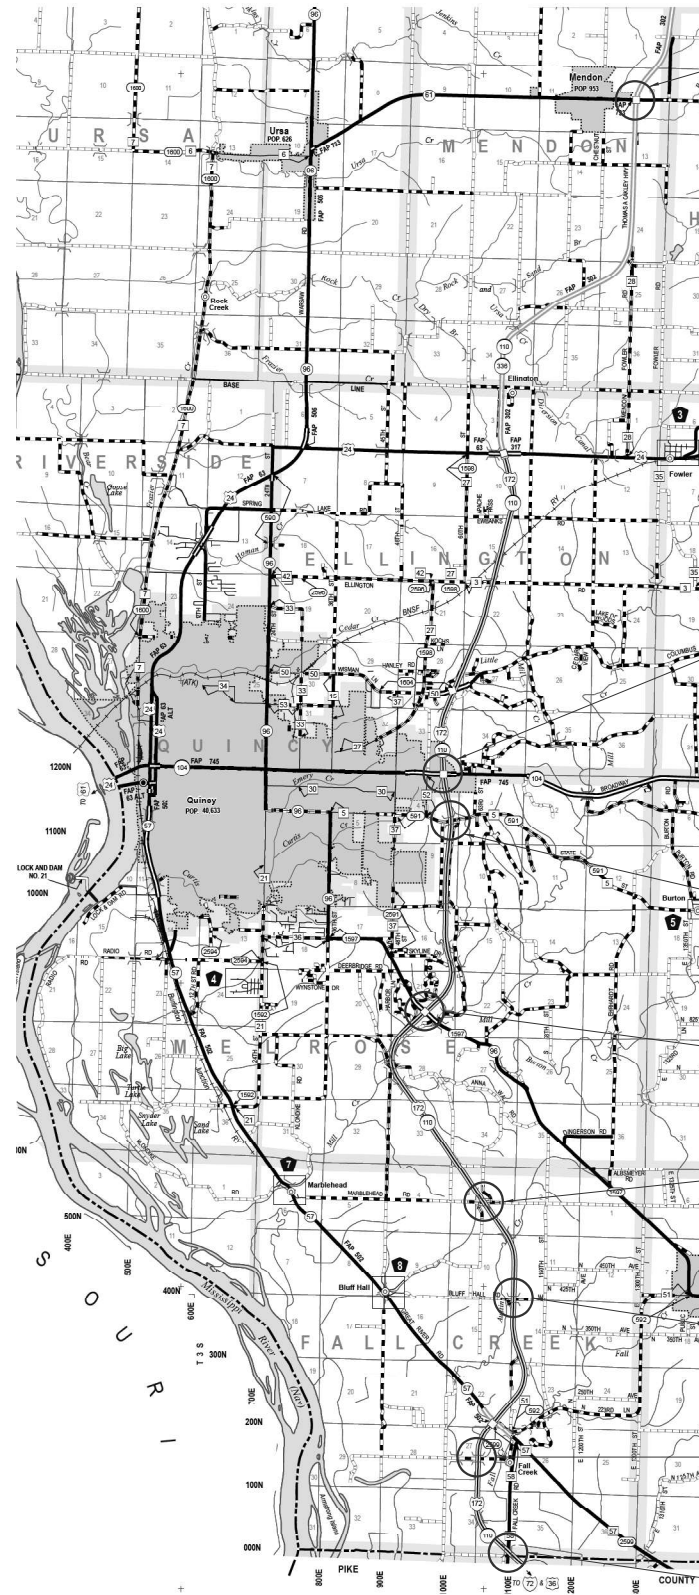

ADAMS COUNTY

SN 001-0084
FAP 733 OVER IL 336
0.3 MI E MENDON

SN 001-0047
IL 104 OVER I-172
BROADWAY INT.

SN 001-0046
CH 5 OVER I-172
0.7 MI S IL 104

SN 001-0044
IL 96 OVER I-172
IL 96 INT.

SN 001-0060
TR 531A OVER I-172
3.6 MI N IL 57

SN 001-0058
TR 551 OVER I-172
2 MI S IL 96


SN 001-0067
TR 597 OVER I-172
0.7 MI S IL 57

SN 001-0069
OR 79 OVER I-172
2.2 MI S IL 57

SN 086-0030
TR 42 OVER I-72
1.3 MI E IL 100

SN 086-0028
TR 128 OVER I-72
2.1 MI E OLD 36

SN 069-0053
TR 50 OVER I-72
1.4 MI E SCOTT CO.

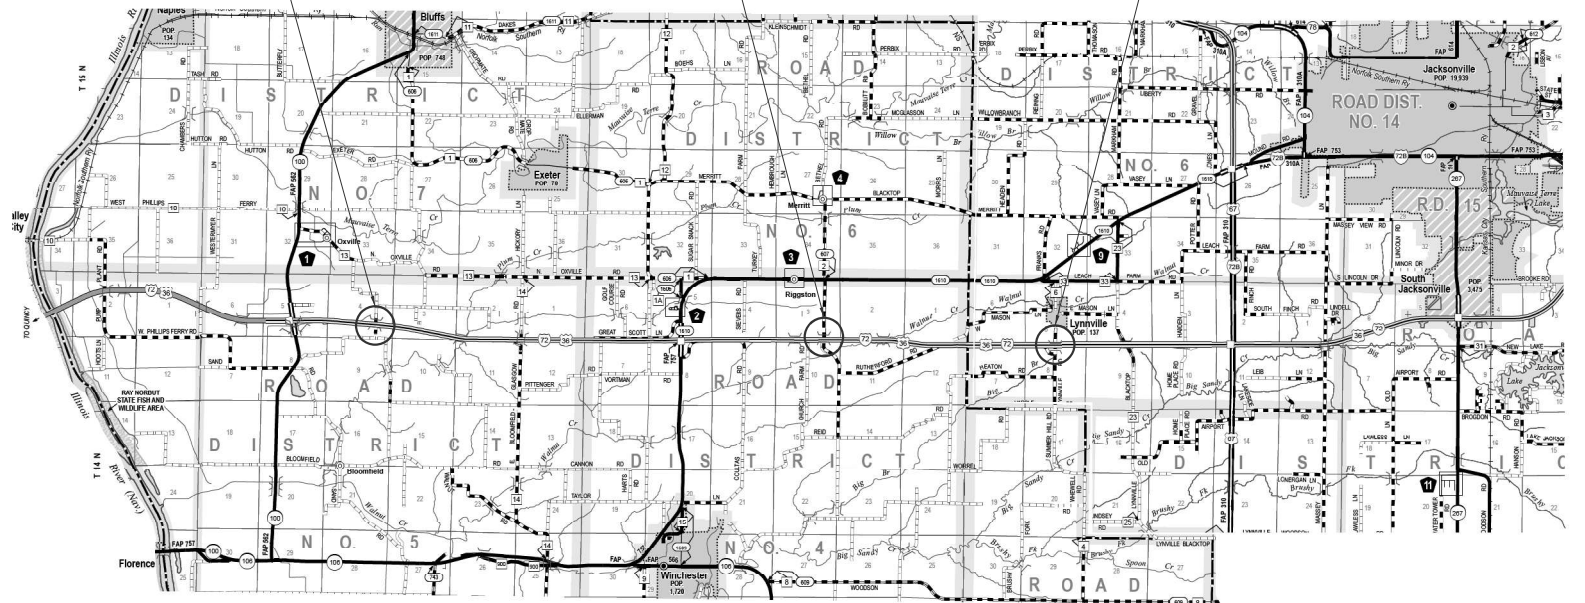

SCOTT COUNTY

MORGAN COUNTY

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION MAPS

SCALE: SHEET 1 OF 2 SHEETS STA. TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	4
CONTRACT NO. 72942				
ILLINOIS FED. AID PROJECT				



SN 075-0130
I-72 WB OVER I-172
I-72/172 INT.

SN 075-0131
I-72 EB OVER I-172
I-72/172 INT.

SN 075-0154
TR 89 OVER I-72
0.7 MI SW I-172

SN 075-0083
TR 20 OVER I-72
2 MI E I-172

SN 075-0088
TR 36 OVER I-72
1 MI W IL 96

SN 075-0089
IL 96 OVER I-72
HULL INT.

SN 075-0092
TR 52 OVER I-72
2.1 MI E IL 96

SN 075-0103
CH 4 OVER I-72
BARRY INT.

SN 075-0104
CH 2 OVER I-72
1.25 MI E BARRY INT.


SN 075-0105
TR 148 OVER I-72
3.5 MI E BARRY INT.

SN 075-0106
TR 180B OVER I-72
4.2 MI W NEW SALEM INT.

SN 054-0075
TR 33 OVER I-155
HARTSBURG INT.

SN 054-0072
TR 79 OVER I-155
1.9 MI N I-55

SN 054-0071
TR 87 OVER I-155
0.6 MI N I-55

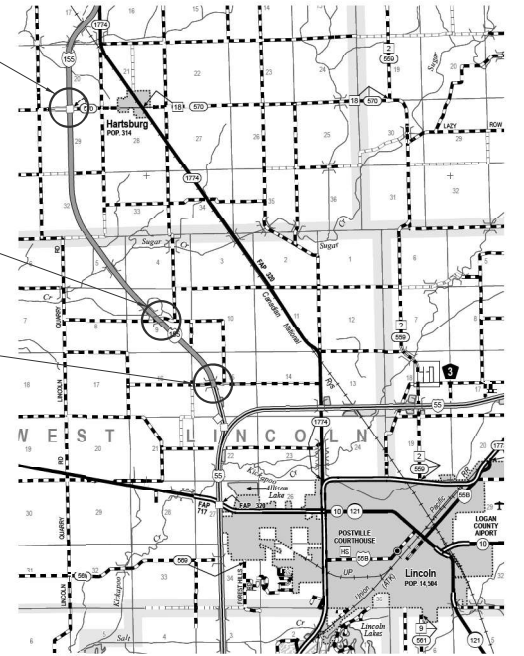

LOGAN COUNTY

PIKE COUNTY


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION MAPS

SCALE: SHEET 2 OF 2 SHEETS STA. TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	5
CONTRACT NO. 72942				
ILLINOIS FED. AID PROJECT				

USER NAME = brandon.dudley	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 2/20/2025	DATE -	REVISED -

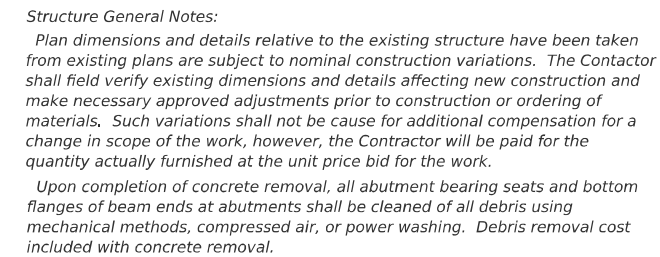[illegible]

CONCRETE REMOVAL

FILE NAME:	USER NAME = brandon.ducley	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL BRIDGE REPAIRS				F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR.	D6 BRIDGE MISC 2025	VARIOUS	7	6
		CHECKED -	REVISED -						CONTRACT NO. 72942				
	PLOT DATE = 2/20/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 2 SHEETS	STA.	TO STA.				
									ILLINOIS FED. AID PROJECT				

MODEL: bridge-1 [Sheet]
FILE NAME: c:\p\work\pwrtdudley\cml\108746\172942_plansheet.dgn

SN	Abut.	Dim. A (ft)	Dim. B (ft)	Dim. C (ft)	Dim. D (in)	Conc. Rem. (Cu. Yd.)	Clean & Paint Exposed Rebar (Sq. Ft.)
001-0044	NW	2.50	5.29	3.82	6.00	0.31	3.90
001-0044	SW	2.50	5.36	3.84	6.00	0.31	3.93
001-0044	NE	2.50	5.25	3.81	6.00	0.31	3.88
001-0044	SE	2.50	5.34	3.84	6.00	0.31	3.92
001-0046	NW	3.75	4.50	4.88	6.00	0.36	4.13
001-0046	SW	3.75	4.57	4.89	6.00	0.37	4.16
001-0046	NE	3.75	4.37	4.84	6.00	0.35	4.06
001-0046	SE	3.75	4.53	4.88	6.00	0.36	4.14
001-0047	NW	2.81	5.38	4.16	6.00	0.35	4.10
001-0047	SW	2.81	5.32	4.14	6.00	0.34	4.07
001-0047	NE	2.81	5.36	4.15	6.00	0.35	4.09
001-0047	SE	2.81	5.30	4.14	6.00	0.34	4.06
001-0058	NW	3.11	4.47	4.23	6.00	0.30	3.79
001-0058	SW	3.11	4.47	4.23	6.00	0.30	3.79
001-0058	NE	3.07	4.49	4.19	6.00	0.30	3.78
001-0058	SE	3.07	4.49	4.19	6.00	0.30	3.78
001-0060	NW	2.84	6.19	4.39	6.00	0.41	4.52
001-0060	SW	2.84	6.80	4.54	6.00	0.46	4.82
001-0060	NE	2.54	6.36	4.13	6.00	0.39	4.45
001-0060	SE	2.54	6.36	4.13	6.00	0.39	4.45
001-0067	NW	3.17	4.27	4.24	6.00	0.29	3.72
001-0067	SW	3.17	4.27	4.24	6.00	0.29	3.72
001-0067	NE	3.17	4.27	4.24	6.00	0.29	3.72
001-0067	SE	3.17	4.27	4.24	6.00	0.29	3.72
001-0069	NW	3.25	4.43	4.36	6.00	0.31	3.84
001-0069	NE	3.25	4.71	4.43	6.00	0.33	3.98
001-0069	SW	3.25	4.71	4.43	6.00	0.33	3.98
001-0069	SE	3.25	4.43	4.36	6.00	0.31	3.84
001-0084	NW	3.12	4.10	4.15	6.00	0.28	3.61
001-0084	SW	3.12	4.06	4.14	6.00	0.27	3.59
001-0084	NE	3.08	4.06	4.10	6.00	0.27	3.57
001-0084	SE	3.08	4.11	4.11	6.00	0.27	3.60
054-0071	NW	3.00	4.90	4.23	6.00	0.33	3.95
054-0071	SW	3.00	4.91	4.23	6.00	0.33	3.96
054-0071	NE	3.00	4.94	4.24	6.00	0.33	3.97
054-0071	SE	3.00	4.92	4.23	6.00	0.33	3.96

SN	Abut.	Dim. A (ft)	Dim. B (ft)	Dim. C (ft)	Dim. D (in)	Conc. Rem. (Cu. Yd.)	Clean & Paint Exposed Rebar (Sq. Ft.)
054-0072	NW	3.17	4.45	4.28	6.00	0.31	3.81
054-0072	SW	3.17	4.46	4.29	6.00	0.31	3.82
054-0072	NE	3.17	4.45	4.28	6.00	0.31	3.81
054-0072	SE	3.17	4.45	4.28	6.00	0.31	3.81
054-0075	NW	2.77	4.59	3.92	6.00	0.28	3.68
054-0075	SW	2.77	4.59	0.00	6.00	0.00	3.68
054-0075	NE	2.77	4.59	3.92	6.00	0.28	3.68
054-0075	SE	2.77	4.59	3.92	6.00	0.28	3.68
069-0053	NW	3.00	4.72	4.18	6.00	0.31	3.86
069-0053	NE	3.00	4.72	4.18	6.00	0.31	3.86
069-0053	SW	3.00	4.72	4.18	6.00	0.31	3.86
069-0053	SE	3.00	4.72	4.18	6.00	0.31	3.86
075-0083	NW	3.25	3.91	4.23	6.00	0.27	3.58
075-0083	NE	3.25	4.04	4.26	6.00	0.28	3.65
075-0083	SW	3.25	4.04	4.26	6.00	0.28	3.65
075-0083	SE	3.25	3.91	4.23	6.00	0.27	3.58
075-0088	NW	3.08	4.35	4.17	6.00	0.29	3.72
075-0088	NE	3.08	4.40	4.18	6.00	0.30	3.74
075-0088	SW	3.08	4.40	4.18	6.00	0.30	3.74
075-0088	SE	3.08	4.35	4.17	6.00	0.29	3.72
075-0089	NW	3.14	4.27	4.21	6.00	0.29	3.71
075-0089	NE	3.14	4.33	4.22	6.00	0.30	3.74
075-0089	SW	3.14	4.33	4.22	6.00	0.30	3.74
075-0089	SE	3.14	4.27	4.21	6.00	0.29	3.71
075-0092	NW	3.33	3.59	4.23	6.00	0.25	3.46
075-0092	NE	3.33	3.07	4.10	6.00	0.21	3.20
075-0092	SW	3.56	3.06	4.33	6.00	0.22	3.31
075-0092	SE	3.56	3.06	4.33	6.00	0.22	3.31
075-0103	NW	3.08	4.39	4.18	6.00	0.30	3.74
075-0103	NE	3.08	4.45	4.19	6.00	0.30	3.77
075-0103	SW	3.08	4.57	4.22	6.00	0.31	3.83
075-0103	SE	3.08	4.40	4.18	6.00	0.30	3.74
075-0104	NW	2.90	5.80	4.58	6.00	0.40	4.35
075-0104	SW	2.90	5.84	4.59	6.00	0.41	4.37
075-0104	NE	2.90	5.88	4.61	6.00	0.41	4.39
075-0104	SE	2.90	5.79	4.58	6.00	0.40	4.35

SN	Abut.	Dim. A (ft)	Dim. B (ft)	Dim. C (ft)	Dim. D (in)	Conc. Rem. (Cu. Yd.)	Clean & Paint Exposed Rebar (Sq. Ft.)
075-0105	NW	3.17	4.36	4.26	6.00	0.30	3.77
075-0105	NE	3.17	4.36	4.26	6.00	0.30	3.77
075-0105	SW	3.08	4.39	4.18	6.00	0.30	3.74
075-0105	SE	3.08	4.39	4.18	6.00	0.30	3.74
075-0106	NW	3.04	4.41	4.14	6.00	0.29	3.73
075-0106	NE	3.04	4.38	4.14	6.00	0.29	3.71
075-0106	SW	3.25	4.65	4.41	6.00	0.33	3.95
075-0106	SE	3.25	4.34	4.34	6.00	0.30	3.80
075-0130	NW	3.15	6.09	4.67	6.00	0.44	4.62
075-0130	NE	3.15	3.82	4.11	6.00	0.26	3.49
075-0130	SW	3.45	6.05	4.96	6.00	0.47	4.75
075-0130	SE	3.45	3.79	4.40	6.00	0.28	3.62
075-0131	NW	3.38	5.38	4.73	6.00	0.40	4.38
075-0131	NE	3.38	3.90	4.36	6.00	0.28	3.64
075-0131	SW	3.38	5.37	4.72	6.00	0.40	4.38
075-0131	SE	3.38	3.87	4.35	6.00	0.28	3.63
075-0154	NW	3.18	4.33	4.26	6.00	0.30	3.76
075-0154	SW	3.18	4.33	4.26	6.00	0.30	3.76
075-0154	NE	3.18	4.38	4.28	6.00	0.30	3.78
075-0154	SE	3.18	4.38	4.28	6.00	0.30	3.78
086-0028	NW	3.00	4.67	4.17	6.00	0.31	3.84
086-0028	NE	3.00	4.67	4.17	6.00	0.31	3.84
086-0028	SW	3.00	4.65	4.16	6.00	0.31	3.83
086-0028	SE	3.00	4.65	4.16	6.00	0.31	3.83
086-0030	NW	3.00	4.89	4.22	6.00	0.33	3.95
086-0030	NE	3.00	4.89	4.22	6.00	0.33	3.95
086-0030	SW	3.00	4.89	4.22	6.00	0.33	3.95
086-0030	SE	3.00	4.89	4.22	6.00	0.33	3.95
						Totals:	31.3 387