


INTERCONNECT SCHEDULE OF QUANTITIES

PAY ITEM	UNIT	QNTY.
UNDERGROUND CONDUIT, GALVANIZED STEEL, 2" DIA.	FOOT	840
HANDHOLE	EACH	1
MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION	EACH	1
ELECTRIC CABLE IN CONDUIT, TRACER, NO. 14 1C	FOOT	2116
DRILL EXISTING HANDHOLE	EACH	1
REMOVE ELECTRIC CABLE FROM CONDUIT	FOOT	366
FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125, MM12F SM24F	FOOT	2185
RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM LEVEL 1	EACH	3
REMOVE FIBER OPTIC CABLE FROM CONDUIT	FOOT	377

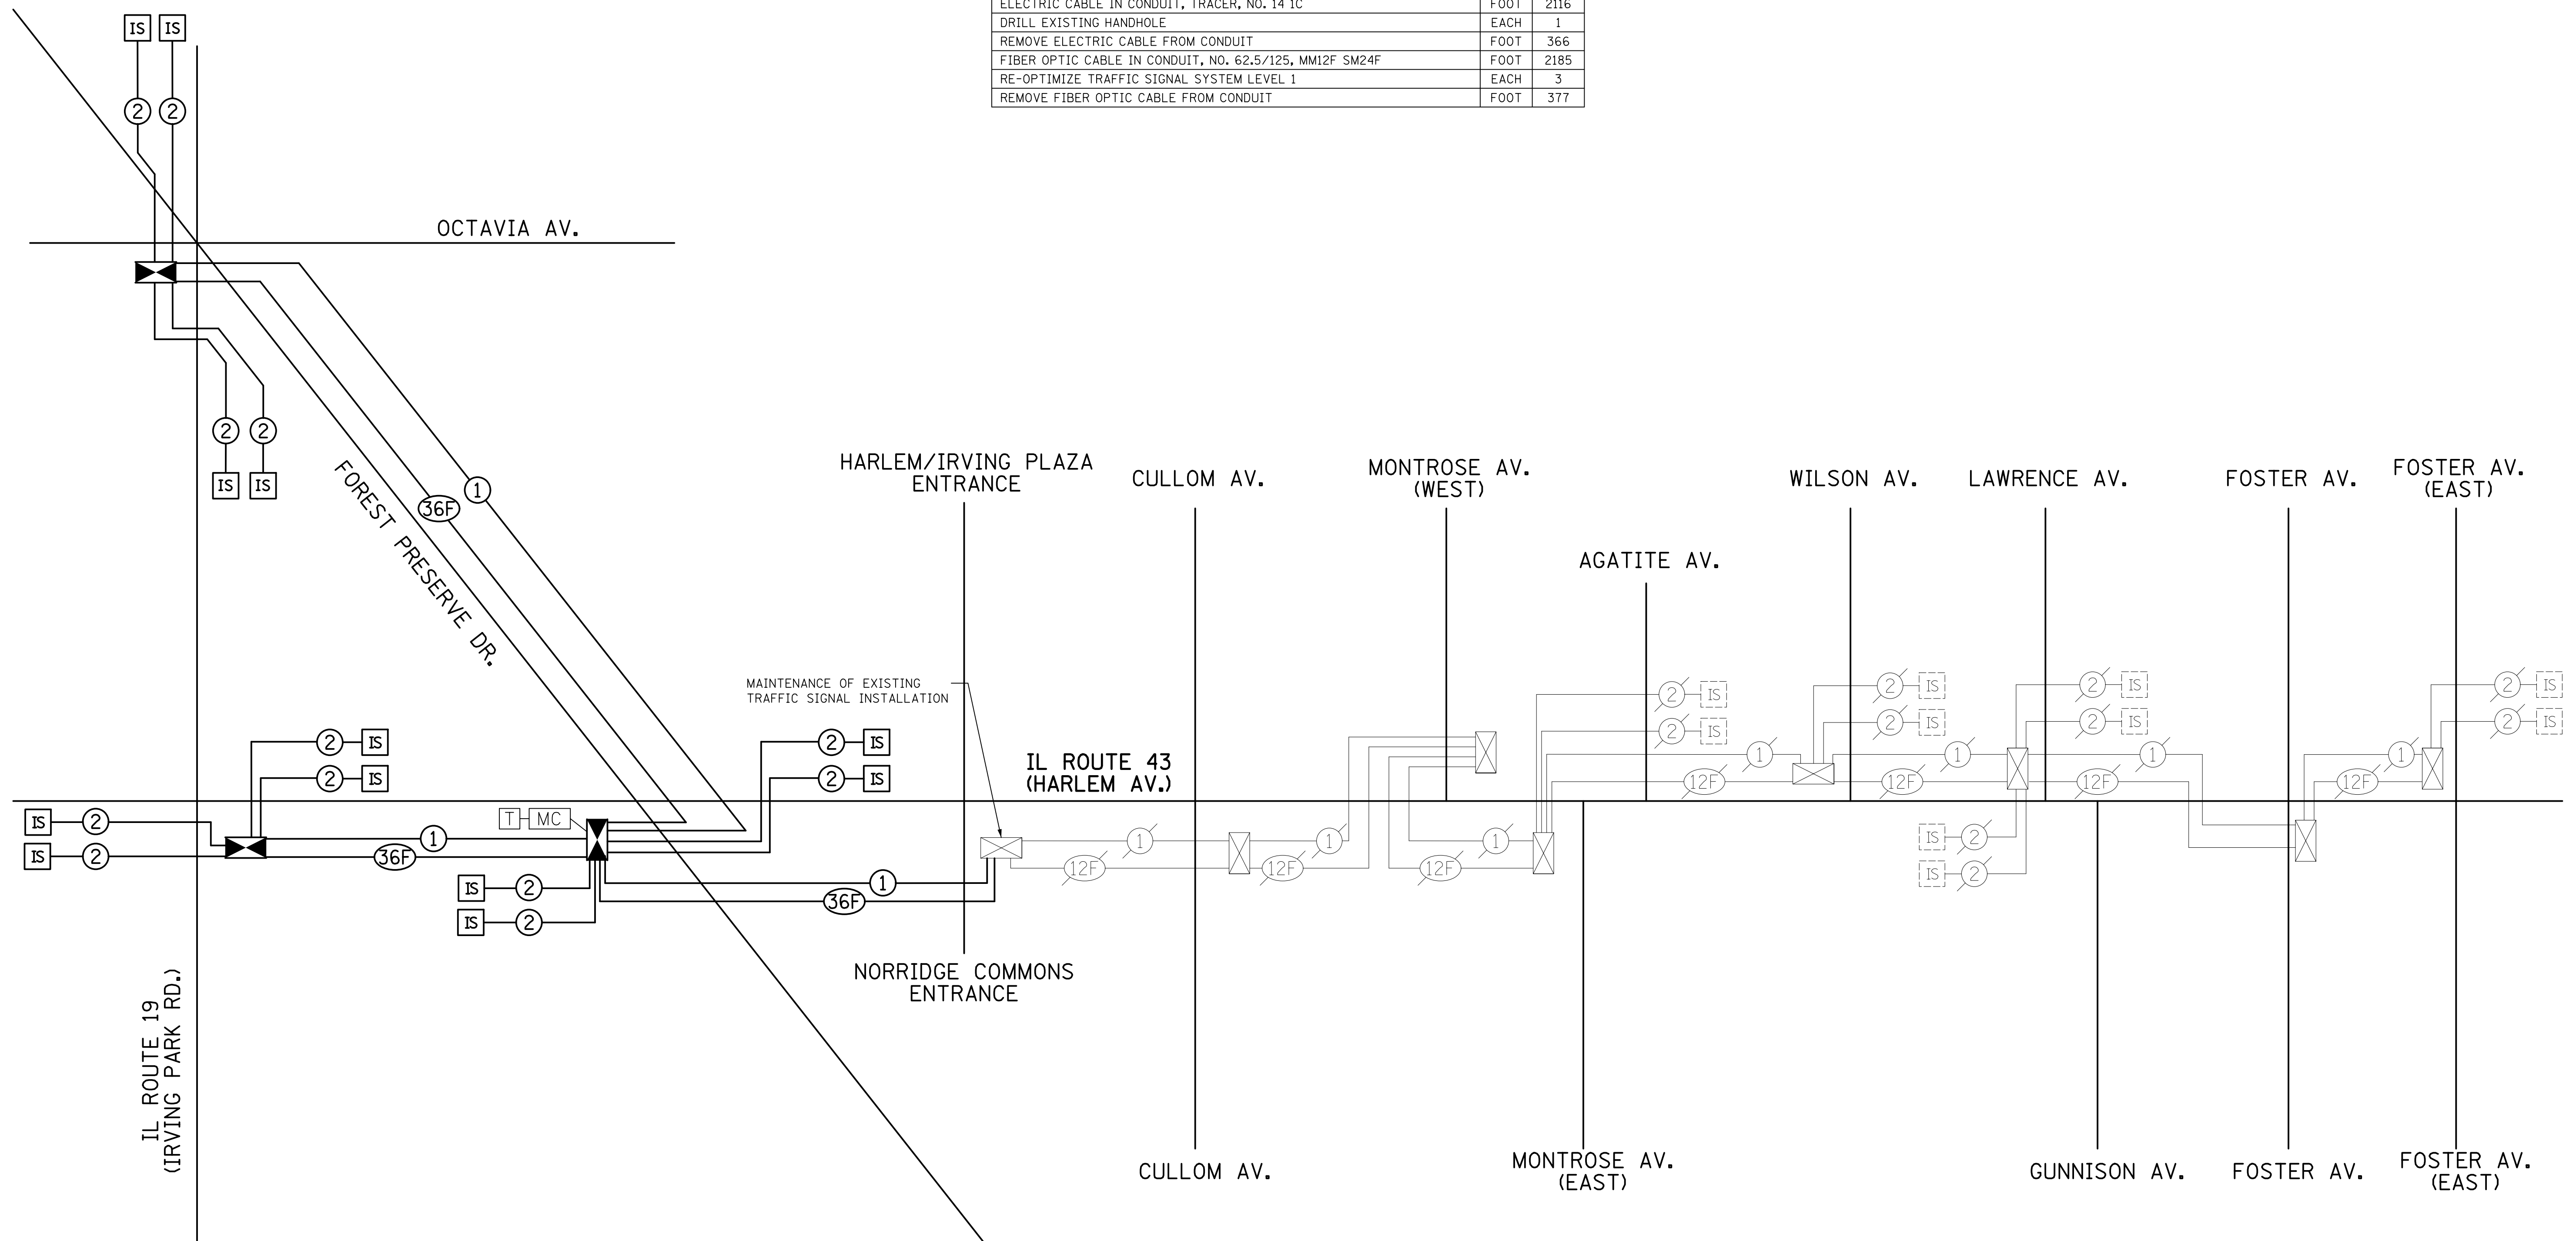

USER NAME = mfb	DESIGNED - BRD	REVISED -
PLOT SCALE = 20.0000' / 1" =	DRAWN - MFB	REVISED -
PLOT DATE = 3/20/2013	CHECKED - JJE	REVISED -
	DATE - 03/21/2013	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

INTERCONNECT SCHEMATIC
IL ROUTE 43 (HARLEM AV.)
IL ROUTE 19 (IRVING PARK RD.) TO FOSTER AVENUE
NO SCALE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE. 0348	SECTION 2012-041TS	COUNTY COOK	TOTAL SHEETS 34	SHEET NO. 33
CONTRACT NO. 60T97				ILLINOIS FED. AID PROJECT