

63085

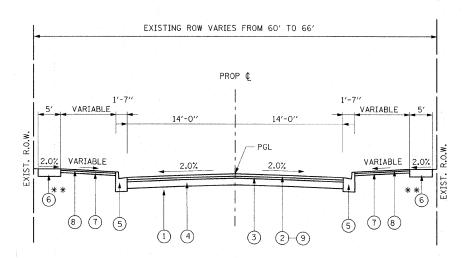

PROPOSED TYPICAL SECTION HAZEL AVENUE

* FOR INFORMATION ONLY CONSTRUCTION IS PART OF SEPARATE CONSTRUCTION CONTRACT

**PCC SIDEWALK THICKNESS IN DRIVEWAYS ARE 6" WITHIN THE LIMITS OF RESIDENTIAL DRIVEWAYS.

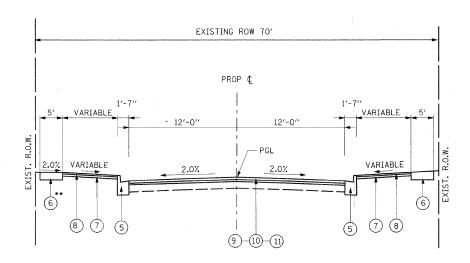

PROPOSED TYPICAL SECTION STA. 77+44 TO STA. 77+64.54 STA. 78+58.46 TO STA. 78+86.00 WILMOT ROAD

> ** PCC SIDEWALK THICKNESS IN DRIVEWAYS ARE 6" WITHIN THE LIMITS OF RESIDENTIAL DRIVEWAYS.

LEGEND (PROPOSED):

- SUB-BASE GRANULAR MATERIAL, TYPE B. 6"
- HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL9.5MM) 2"
- (3) HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50, 2.5"
- 4 HOT MIX ASPHALT BASE COURSE 4.5"
- COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12 REMOVAL AND REPLACEMENT (5)
- 6 PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
- (7) FURNISHING AND PLACING TOP SOIL, 4 INCH (INCLUDED IN SIDEWALK, SEE NOTE)
- (8) SODDING, SALT TOLERANT (INCLUDED IN SIDEWALK SEE NOTE)
- (9) BITUMINOUS MATERIAL (PRIME COAT)
- (10) HOT MIX ASPHALT SURFACE COURSE, MIX "D", N50 (1-1/2")
- 11) LEVELING BINDER (MACHINE METHOD N50, 3/4")

NOTE:

ANY TURF RESTORATION WORK REQUIRED AS PART OF SIDEWALK CONSTRUCTION, INCLUDING TOPSOIL, SOD, AND FERTILIZER PLACEMENT SHALL BE INCLUDED IN THE WORK INVOLVED FOR SIDEWALK CONSTRUCTION. SEE SPECIAL PROVISION.

"PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH"

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

ITEM	AC TYPE	VOIDS		
ROADWAY HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	PG 64-22	4% @ 50 Gyr	٠.	
DRIVEWAYS HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL9.5MM) 2"	PG 64-22 *	4% © 50 Gyr		
ROADWAY LEVELING BINDER (M.M.), N5O (IL 9.5MM)	PG 64-22 / 58-22	4% @ 50 Gyr	ī.	

THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURES IS 12 LBS/ SQ YD/IN * WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22

100 SOUTH WACKER DRIVE SUITE 500 CHICAGO, IL 60606 REVISIONS NAME VILLAGE OF DEERFIELD PROPOSED TYPICAL SECTIONS HAZEL AVE. & WILMOT ROAD SCALE: VERT. NONE HORIZ. NONE DATE: 9/12/20088 DRAWN BY: MIA