

To be placed as directed by the Engineer

**GENERAL NOTES**

Monodirectional Barrier Wall markers shall be placed at 25' centers. Markers on the right shall be crystal and on the left shall be amber. See Standards 704001.


All existing pavement markings which conflict with the revised traffic pattern shall be removed.

All signs shall be post mounted.

Yellow pavement marking tape to be used on the left edge and white on the right edge of the driving lanes.

Flashing lights shall be installed above the first two signs of a series in advance of the work area during hours of darkness.

Signs mounted in the median may be omitted when the median is less than 10 feet wide.

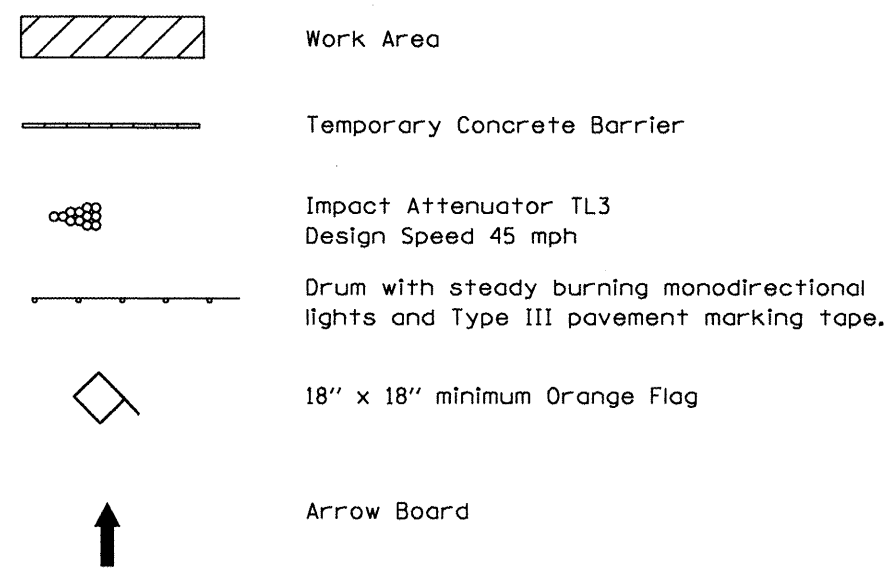

**STAGE II**

FILE NAME =	USER NAME = loynedm	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TRAFFIC CONTROL AND PROTECTION (SPECIAL)</b>	F.A.J. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
S:\GEN\DRIFT\STD&PLNS\Squad1\68092 Ar	ort Road\plan01.dgn	DRAWN -	REVISED -			6578	(1-RIRS (1-VCIBR	Peoria	142	39	
	PLOT SCALE = 1/8" = 100' / IN.	CHECKED -	REVISED -			CONTRACT NO. 68092					
	PLOT DATE = 10/17/2008	DATE -	REVISED -			SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.