TOTAL SHEET SHEETS HO. COUNTY SECTION 303 131B(1&2)BR McHENRY 107 57 FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT

CONTRACT NO. 60B83

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:

Minimum Capacity (Tension in kips) = 1.25 x fy x A_t


(Tension in kips)
Minimum *Pull-out Strength = $0.66 \times fy \times A_f$ (Tension in kips)

Where fy = Yield strength of lapped reinforcement bars in ksi.

A_f = Tensile stress area of lapped reinforcement bars.

* = 28 day concrete

	BAR SPLIC	ER ASSEMBLI	ES		
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	Strength Requirements			
		Min. Capacity kips - tension	Min. Pull-Out Strength kips - tension		
#4	1'-8''	14.7	7,9		
#5	2'-0"	23.0	12.3		
#6	2'-7"	33.1	17.4		
#7	3'-5"	45.1	23.8		
#8	4'-6''	58.9	31.3		
#9	5′-9′′	75.0	39.6		
#10	7'-3"	95.0	50.3		
#11	9'-0''	117.4	61.8		

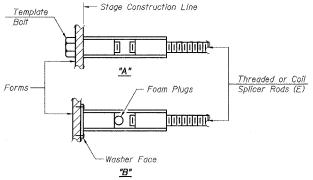

BAR SPLICER ASSEMBLY ALTERNATIVES

— The diameter of this part is equal or larger than the

diameter of bar spliced.

** Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

ROLLED THREAD DOWEL BAR

** ONE PIECE


airiidd arriidd

WELDED SECTIONS

The diameter of this part


of the bar spliced.

is the same as the diameter




INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nalling to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

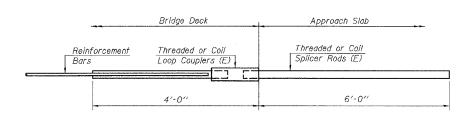

FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

	Bai	⁻ Splicer	r tor	#5 .	bar	
Min.	Capacity	= 23.0	kips	- te	ension	
Min.	Pull-out	Strengt	h = 1	2.3	kips -	tension

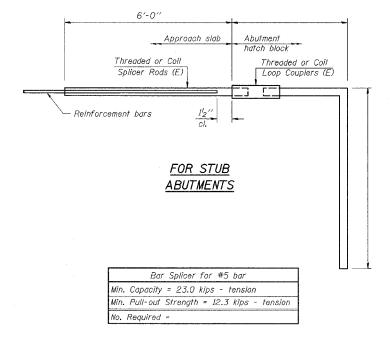

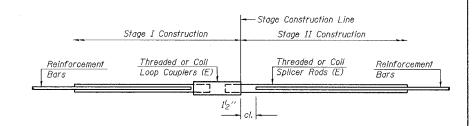

STANDARD

Bar Size	No. Assemblies Required	Location
#5	325	Deck
#6	16	Diaphragm
#6	20	Abutments
#6	18	Pier
#7	10	riei
Total	389	

ILLINOIS DEPARTMENT OF TRANSPORTATION
BAR SPLICER ASSEMBLY DETAILS
IL. RTE. 173
OVER
PISCASAW CREEK OVERFLOW
F.A.P. RTE. 303 SECTION: 131B(1&2)BR
McHENRY COUNTY STATION 90+20.80
STRUCTURE NO. 056-0089
SCALE: DRAWN BY: D.L./F.M.
DATE: APRIL 13, 2007 CHECKED BY: B.N.S./J.C.I
CHRISTIAN-ROGE & ASSOC INC

BSD-1 11-1-06