


CAST-IN-PLACE REINFORCED CONCRETE END SECTIONS

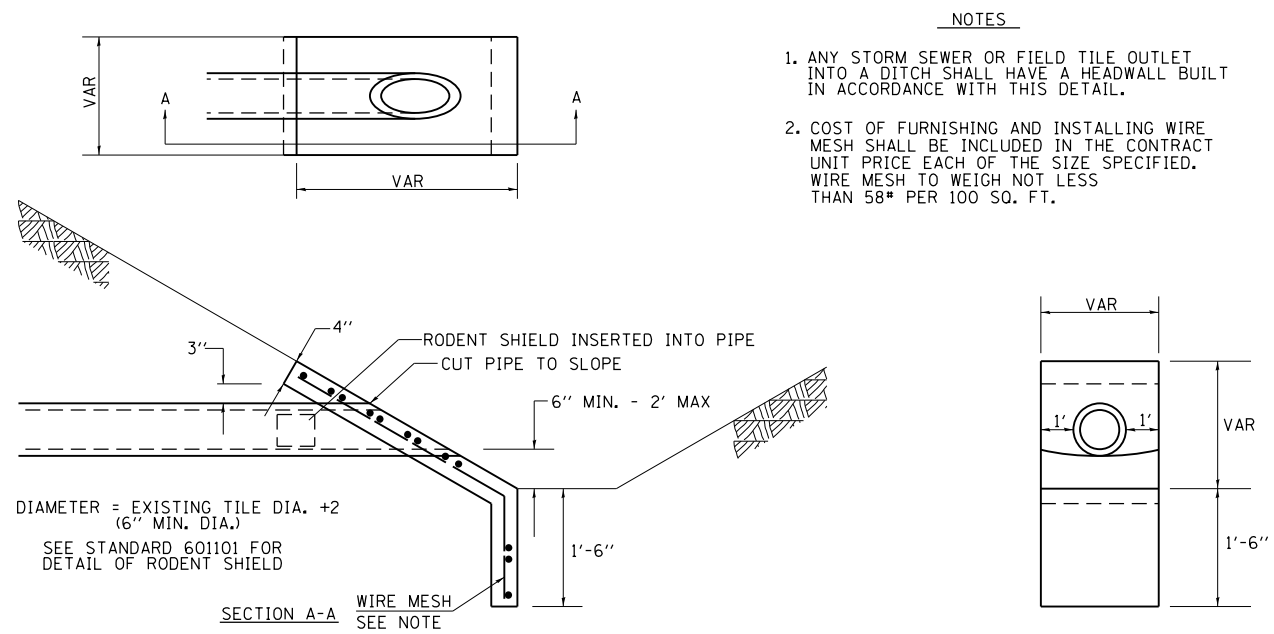


- NOTES**
1. ANY STORM SEWER OR FIELD TILE OUTLET INTO A DITCH SHALL HAVE A HEADWALL BUILT IN ACCORDANCE WITH THIS DETAIL.
 2. COST OF FURNISHING AND INSTALLING WIRE MESH SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE EACH OF THE SIZE SPECIFIED. WIRE MESH TO WEIGH NOT LESS THAN 58# PER 100 SQ. FT.

REVISED - 10-09-12

CAST-IN-PLACE REINFORCED CONCRETE END SECTIONS 28.4

DELINEATOR AND POST ORIENTATION

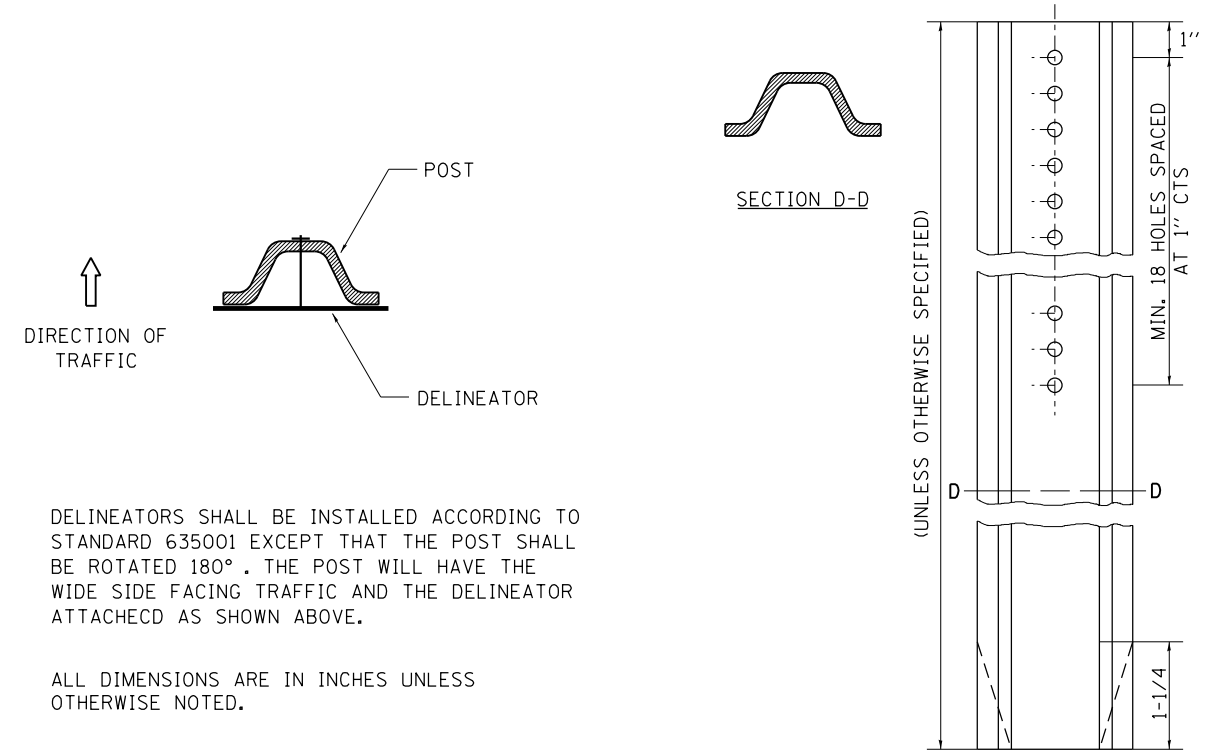

DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHED AS SHOWN ABOVE.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 10-03-11

DELINEATOR AND POST ORIENTATION 37.4

ROAD CLOSED TO OVERSIZED LOADS



Permit Loads - Loads Over 13 Feet 3.0" Radius, 1.3" Border, Black on Orange:
 (NO OVERSIZE - O, OVERWEIGHT LOADS) O 85% spacing, (XX MILES AHEAD) D;
 Table of letter and object lefts.

N	D	O	V	E	R	S	I	Z	E	-				
11.7	18.1	30.0	38.2	42.8	48.4	54.4	60.7	63.5	69.5	80.8				
O	V	E	R	W	E	I	G	H	T	O	A	D	S	
2.8	8.9	15.0	20.4	28.2	33.4	38.8	41.3	47.4	53.2	64.5	69.9	75.9	82.9	89.7
X	X	M	I	L	E	S	A	H	E	A	D			
7.6	13.6	25.3	32.3	35.1	40.8	46.2	57.9	65.1	71.4	76.8	83.7			


All work to furnish and install these signs shall be included in the cost of the Traffic Control Standards and shall not be paid for separately.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 3-11-09

ROAD CLOSED TO OVERSIZED LOADS 40.4

TYPICAL BENCHING ON EXISTING EMBANKMENT

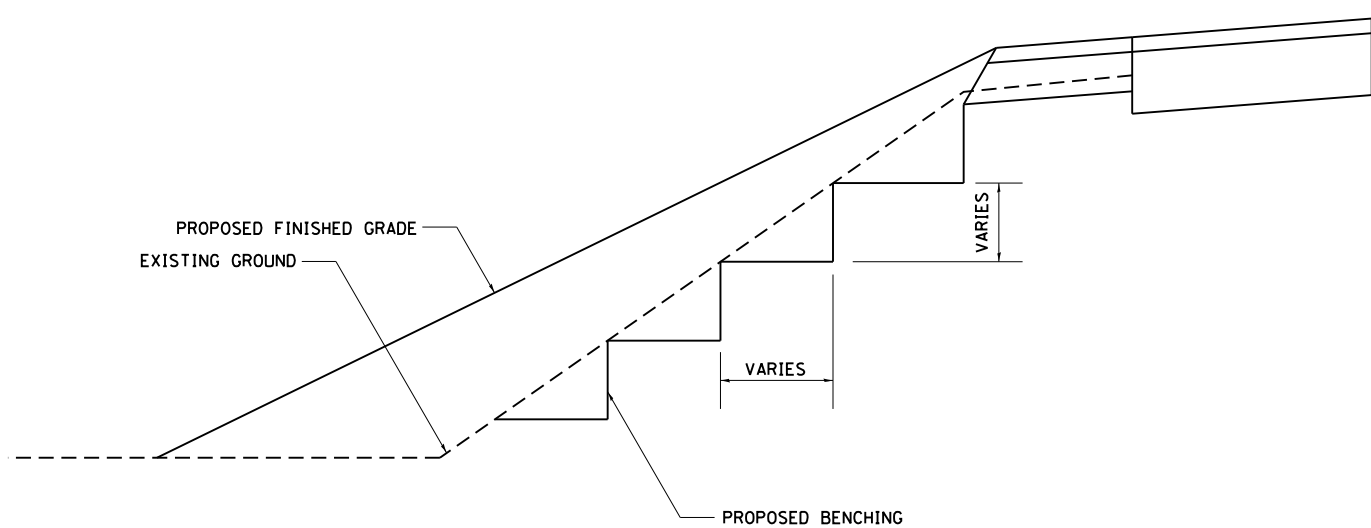

REVISED - 2-22-06	REGION 2 / DISTRICT 2 STANDARD	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
REVISED -		650	104T-3	JoDAVISS	97	77
REVISED -		CONTRACT NO. 64F74				
REVISED -		SCALE: 40,000' / 1"	SHEET NO.	OF SHEETS	STA.	TO STA.

TYPICAL BENCHING ON EXISTING EMBANKMENT 50.4

PLOT DATE = Thu Oct 10 07:46:53 2013