


# FOR INFORMATION ONLY

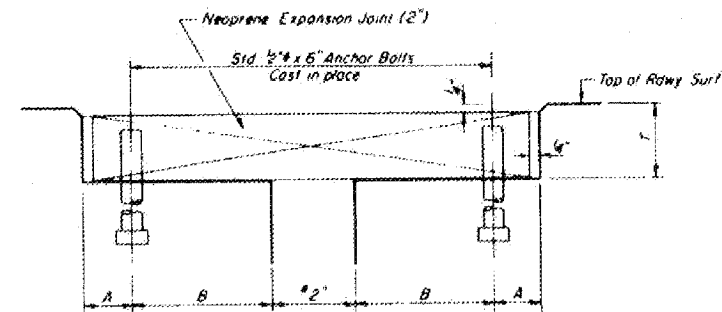

**CROSS SECTION**

at 50°F  
Dimensions are at right angles

**NOTE**  
Joint openings shall be adjusted in accordance with Article 503.07(c) of the Std. Specs. when the deck is poured at an ambient temperature other than 50°F.

**ALTERNATE NEOPRENE EXPANSION JOINTS (2")**  
(See Special Provisions)

Model	Supplier	Blockout Dimensions
TRANSFLEX, MODEL 200A	General Fire Company	T = 1 3/8"; A = 1 1/8"; B = 1 3/8"
FEL-SPAN, MODEL T-30 Set joint seal 1/8" at 50°F	Fel-Pro Building Products Inc	T = 1 3/4"; A = 2 1/4"; B = 2 1/8"
WABO ELASTOAM, TYPE 300 Set joint seal 1/8" at 50°F	Watson Bowman Associates, Inc.	T = 1 3/4"; A = 2 1/4"; B = 2 1/8"
WABO ALU-STRIP, TYPE III S300 Set joint seal 1/2" at 50°F Permitted for up to 50° skew	Watson Bowman Associates, Inc.	T = 1 3/4"; A = 1 5/8"; B = 2 1/4"
LOW PROFILE DNFLEX-25 Set joint seal 1/2" at 50°F Roadway ball channel shall be filled with approved grout Permitted for up to 50° skew	Structural Accessories, Inc.	T = 1 3/4"; A = 1 5/8"; B = 2 3/8"

DESIGNED	D.H.C.
CHECKED	K.L.P.
DRAWN	N.D.
CHECKED	K.L.P.

EJ-1 2-10-77

**NEOPRENE EXPANSION JOINTS (2")**  
FOR EXPANSION LENGTH OF DECK = 0 TO 160 ft

F.A. RTE. 18 OVER TRIB. OF MISSISSIPPI R.  
F.A. RTE. 18, SECTION 104 BY-1BR  
CARROLL COUNTY  
STA. 566 + 37.11

AM&C No. 193C