DIEHL ROAD

SEE CONTRACT 60R31 ← → CONTRACT 60I31
WORK LIMIT
STA. 4045+00

EXISTING STORM SEWER, TYP.

PROPOSED ℄ ILLINOIS ROUTE 59

PROPOSED R.O.W.

EXISTING R.O.W.

SEE NOTE 7

4045+00 (316)

SEE NOTE 7

(338)

SEE NOTE 7

(331)

4050+00 (346A)

PROPOSED R.O.W.

MATCH LINE STA. 4051+00

PLUG PROPOSED LATERALS, TYP.
(SEE NOTE 7)

TEMP. EASEMENT

PERIMETER EROSION
BARRIER
(PREVIOUS STAGE)

EROSION CONTROL SEEDING
INSTALLED IN A PREVIOUS
STAGE, TYP.

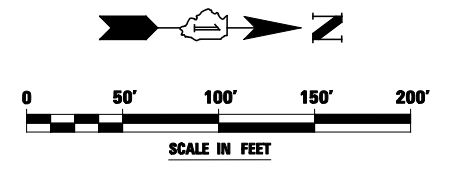## EROSION CONTROL LEGEND

TEMPORARY EROSION CONTROL SEEDING
AND TEMPORARY EROSION CONTROL BLANKET

PERMANENT SEEDING (SEE NOTE 3)

TEMPORARY EROSION CONTROL SEEDING OR
PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE

TEMPORARY PAVEMENT

PERIMETER EROSION BARRIER (SEE NOTE 2)

PERIMETER EROSION BARRIER INSTALLED
IN PREVIOUS STAGE

INLET FILTER

INLET FILTER INSTALLED IN PREVIOUS STAGE

(200) PERMANENT DRAINAGE STRUCTURE NUMBER
(SEE NOTE 1)

TEMPORARY DITCH CHECK

TEMPORARY DITCH CHECK INSTALLED
IN PREVIOUS STAGE

INLET & PIPE PROTECTION

INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE

FLOW DIRECTION (SEE NOTE 4)

PROPOSED STORM SEWER (SEE NOTE 1)

PROPOSED STORM SEWER INSTALLED
IN PREVIOUS STAGE

TEMPORARY PIPE CULVERT

(*) - SEE NOTE 5

NOTES

1. SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION

2. PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO
   R.O.W., EASEMENT, AND CONTRUCTION LIMITS AND AS DIRECTED
   BY THE ENGINEER.

3. SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.

4. SEE STAGE 2 CROSS SECTIONS FOR GRADING INFORMATION.

5. PROPOSED STRUCTURE SHALL BE BURIED AND TEMPORARILY
   COVERED/CLOSED WITH STEEL PLATE OF THICKNESS SPECIFIED
   AND APPROVED BY THE ENGINEER. PAYMENT FOR THIS TEMPORARY
   COVER INSTALLATION AND REMOVAL SHALL BE CONSIDERED
   INCLUDED IN THE COST OF THE PROPOSED STRUCTURE.

7. WHEN TEMPORARY OR PERMANENT STORM SEWER IS TO BE PLACED
   BELOW EXISTING PAVEMENT OR TEMPORARY PAVEMENT, THE
   EXISTING PAVEMENT OR TEMPORARY PAVEMENT WITHIN THE LIMITS
   OF THE TRENCHING OPERATION, SHALL BE REMOVED AND REPLACED.
   PAID FOR AS "CLASS D PATCHES, TYPE III, 15 INCH (SPECIAL)".

N

0 50' 100' 150' 200'
SCALE IN FEET