

5- $\frac{3}{4}$ " BOLTS SHALL BE ANCHORED INTO DRILLED HOLES USING A CHEMICAL ADHESIVE. MINIMUM EMBEDMENT 10". ANCHOR BOLTS WITH STANDARD WASHERS. AFTER TIGHTENING, CUT THE ANCHOR BOLTS FLUSH WITH THE NUTS, AND DAMAGE THE NUTS TO PREVENT THEM FROM LOOSENING.

* GUTTER LINES OMITTED FOR CLARITY

45'-7 $\frac{3}{4}$ " PAY LIMITS OF TRAFFIC BARRIER TERMINAL TYPE T6 (1 EACH) @ 30:1 TAPER OR FLATTER

PAY LIMITS OF OTHER TYPE

TYPE G-3/G-2 GUTTER (*)


TWO SECTIONS OF THE THRIE BEAM
ONE SET INSIDE THE OTHER

SINGLE SECTION OF THRIE BEAM
← DIRECTION OF TRAFFIC

SINGLE SECTION OF W-BEAM
SEE STANDARD C1

TRANSITION SECTION (SEE DETAIL)
INCLUDED IN TRAFFIC BARRIER TERMINAL TYPE T6

PLAN

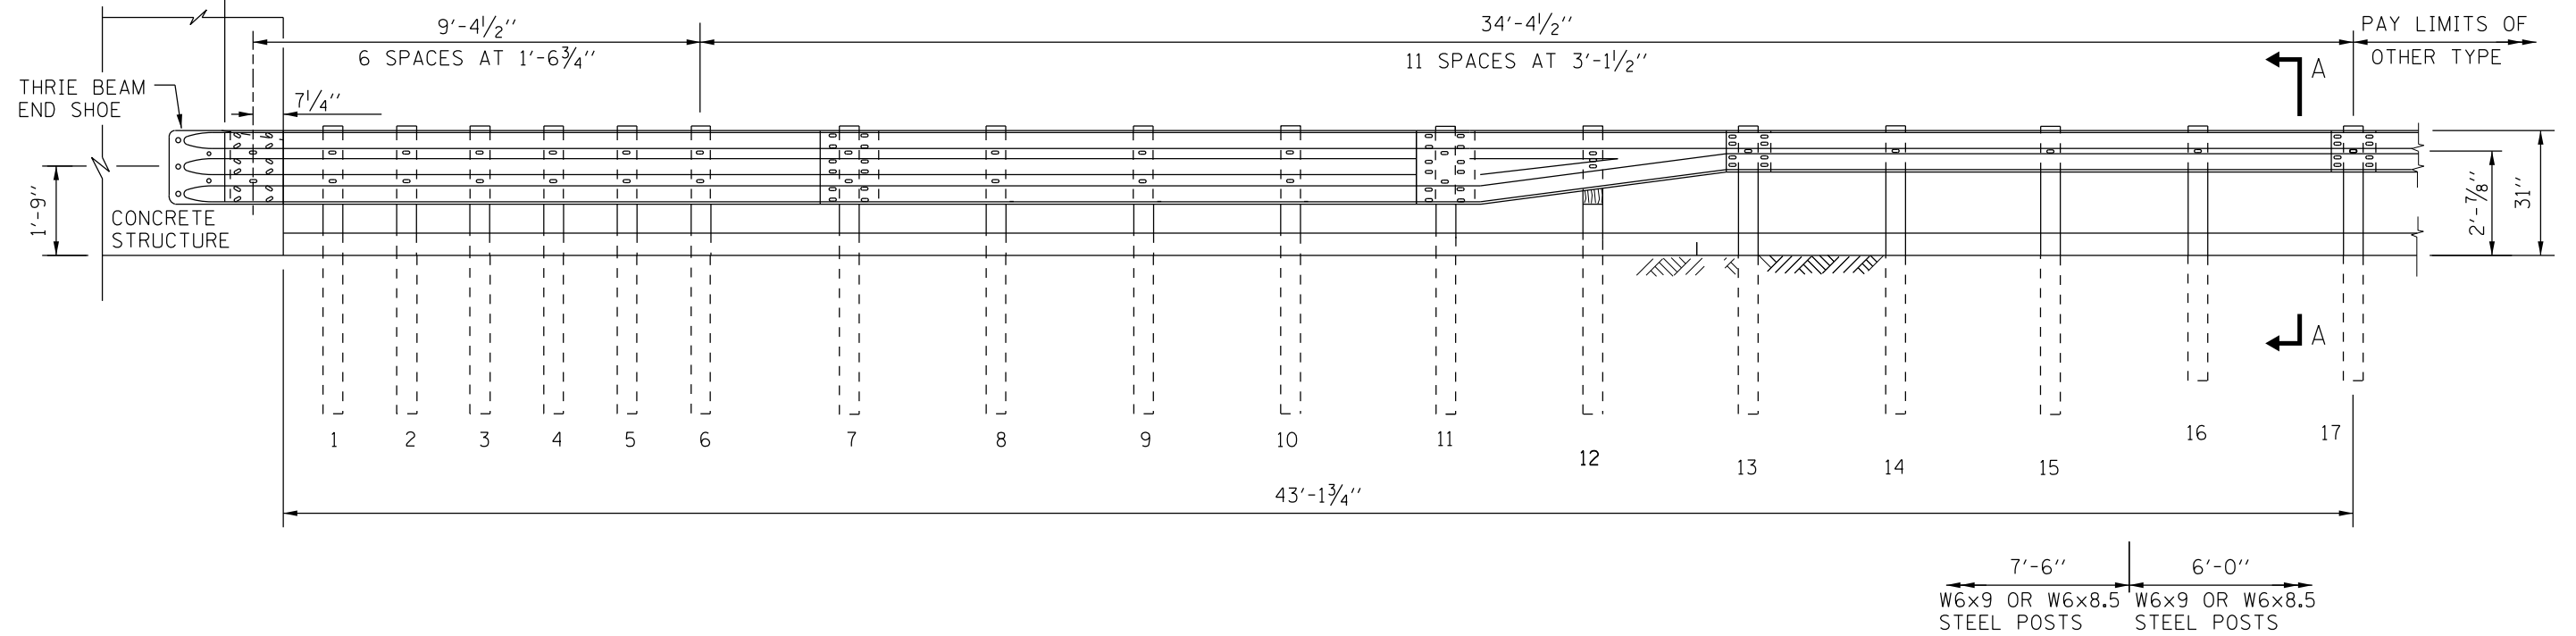

FOR OTHER CONCRETE STRUCTURE (VERTICAL FACE)
WITH TYPE G-3/G-2 GUTTER

NOTE:

SEE SHEET 1 OF THIS SERIES FOR NOTES.
CONTRACT 60I31 SHEET 916 OF 963
SHEET 2 OF 4

APPROVED *Paul Kovacs* CHIEF ENGINEER DATE 7-1-2009



TRAFFIC BARRIER
TERMINAL, TYPE T6

STANDARD C9-03