



(1) BACKED BENCH (QTY: 8)

MODEL: PLAINWELL BACKED BENCH MANUFACTURER: LANDSCAPE FORMS SURFACE MOUNT IPE WOOD AND BRONZE POWDER COATED ALUMINUM

NOTE: SURFACE MOUNT OPTION: CPRROSION-RESISTANT ANCHORING HARDWARE SUPPLIED BY OTHERS 야함" HOLES WITH COUNTERBORE PROVIDED FOR SOCKET HEAD CAP SCREWS.



(2) BENCH SURFACE MOUNT ON PAVERS

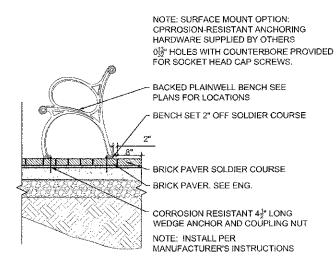



@24"

TOP VIEW

 $11\frac{1}{4}^{0}$

CLAY BRICK PAVER CONCRETE BASE (SEE ENG)

YB SERIES BENCH BY SITECRAFT INC

3/8" X 2" FLAT STEEL BAR ARMREST

CERTIFIED IPE WOOD SLATS ATTACHED

WITH TAMPER RESISTANT STAINLESS

4 ANCHOR BOLTS PER LEG TO EXTEND MIN 3" INTO CONCRETE BASE- EPOXY

HOLE FOR OPTIONAL

MODEL: CHASE PARK

OR APPROVED EQUAL

GALLON CAPACITY

BOTH SIDES

KEYED LOCK

DOOR LATCH RELEASE

MANUFACTURER: LANDSCAPE FORMS

STYLE: SIDE OPENING W/ RECYCLING, 36

1/8" ALUMINUM FILLER PART W/ 5" HOLE

STANDARD RECTANGULAR OPENING

11 GAUGE ALUMINUM BACKER WELDED TO CAST PANEL.

5 X 7 VINYL READS "RECYCLABLE"

COLOR:BRONZE (POWDERCOAT)

ANCHORING

DRAIN HOLE

(OR APPROVED EQUAL)

STEEL FASTENERS

SURFACE MOUNTING

GROUT INTO SLAB

. Outdoordoodsub

NOTE: ALL METAL TO BE HOT-DIPPED GALVANIZED AND POWDER COATED

BRONZE COLOR FINISH

31-3"

COLOR: BRONZE TO MATCH

LF PLAINWELL BENCH BRONZE


- 3"x3"x1/4" TUBULAR STEEL POST




FINISH: STAINLESS STEEL NOTE: SPECIALTY RACK REQUIRED FOR INCREASED EMBEDMENT DEPTH CORE DRILLED 3" DIAMETER HOLES

INSTALL PER MANUFACTURER'S RECOMMENDATION CONCRETE PAD SEE ENG

CONC. THICKENED SLABS @ ALL BIKE RACK SUPPORT LOCATIONS.

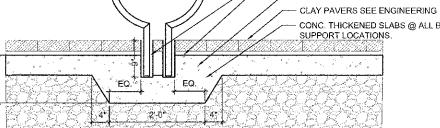


BIKE RACK (QTY: 9) SECTION
SCALE= 1"=1'-0"

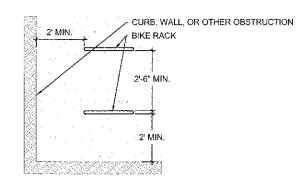

HOLE FOR OPTIONAL ANCHORING DRAIN HOLE MANUFACTURER: LANDSCAPE FORMS MODEL; CHASE PARK OR APPROVED EQUAL STYLE: SIDE OPENING, 36 GALLON CAPACITY COLOR: BRONZE (POWDERCOAT) TOP VIEW **BOTTOM VIEW** 111° 11 GAUGE ALUMINUM BACKER WELDED TO CAST PANEL. 5 X 7 VINYL READS "TRASH ONLY" BOTH SIDES KEYED LOCK 3'-3" DOOR LATCH RELEASE NON-MARRING GLIDES

NOTES:

- 1. INSTALLER IS RESPONSIBLE FOR ANCHORING HARDWARE SUITABLE FOR SITE CONDITIONS. CORROSION RESISTANT GLIDERS ARE RECOMMENDED. THE RECEPTACLE SHOULD BE SURFACE MOUNTED
- WITH NYLON GLIDES IN PLACE
 2. INSTALL ACCORDING TO THE ANCHOR MANUFACTURER'S INSTRUCTIONS
- 5 TRASH RECEPTACLE (QTY: 6) SURFACE MOUNT

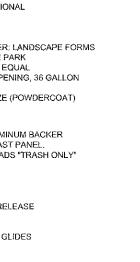

- NON-MARRING GLIDES 1. INSTALLER IS RESPONSIBLE FOR ANCHORING HARDWARE SUITABLE FOR SITE CONDITIONS, CORROSION RESISTANT GLIDERS ARE RECOMMENDED. THE RECEPTACLE SHOULD BE SURFACE MOUNTED WITH NYLON GLIDES IN PLACE

BOTTOM VIEW

2. INSTALL ACCORDING TO THE ANCHOR MANUFACTURER'S INSTRUCTIONS

RECYCLING RECEPTACLE (QTY: 6) - SURFACE MOUNT

BIKE RACKS LAYOUT PLAN VIEW SCALE= 1/2"=1'-0"

FILE NAME =	USER NAME	DESIGNED - JB & JM	REVISED —
\$FILEL\$		DRAWN - JC & SM	REVISED —
	PLOT SCALE =	CHECKED JB	REVISED —
	PLOT DATE =	DATE - 10.18,2012	REVISED —

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

WILCOM CIDEET					F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
					1441	12-00073-01-TL	KANE	88	30		
							63763 CONTRACT N				NO.
	SCALE: SHOWN	SHEET	0F	SHEETS		TO STA.	ILLINOIS FED. AID PROJECT				