

SUMMARY OF QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
AR156511	DITCH CHECK	EACH	16
AR156520	INLET PROTECTION	EACH	9
AR156521	HEADWALL PROTECTION	EACH	2
AR156540	RIPRAP	S.Y.	74
AR901510	SEEDING	ACRE	12
AR908510	MULCHING	ACRE	12

SEEDING DATA

THE GRADING LIMITS ARE SHOWN ON THIS SHEET BY A HEAVY DASHED LINE (---). ALL AREAS WITHIN THESE LIMITS, EXCEPT THE PROPOSED PAVEMENT, SHALL BE LIMED, FERTILIZED AND SEEDING IN ACCORDANCE WITH THE FOLLOWING FORMULA AND RATES OF APPLICATION.

LIME (TONS PER ACRE) _____ 2
 FERTILIZER (MINIMUM POUNDS OF AVAILABLE PLANT FOOD PER ACRE)

N	90
P ₂ O ₅	350
K ₂ O	240
TOTAL	680

SEEDING (MINIMUM POUNDS OF PURE LIVE SEED PER ACRE)
 ALTA FESCUE _____ 80
 PERENNIAL RYEGRASS _____ 30
 CREEPING RED FESCUE _____ 20
 SPRING OATS _____ 48
 AREA TO BE SEEDING _____ 12 ACRES
 DATE SEEDING COMPLETED _____

MULCHING DATA


ALL EARTHEN AREAS WITHIN THE GRADING LIMITS WILL BE MULCHED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS AT THE RATE OF 2 TONS PER ACRE.
 AREA TO BE MULCHED _____ 12 ACRES
 DATE MULCHING COMPLETED _____

NOTE

REFER TO THE CROSS-SECTIONS FOR GRADING AND SEEDING MATCH POINTS.

LEGEND

- EXISTING PAVEMENT
- PROPOSED IMPROVEMENTS
- PROPOSED GRADING AND SEEDING LIMITS
- PROPOSED INLET PROTECTION
- PROPOSED PIPE EXTENSION W/ HEADWALL
- DITCH CHECK

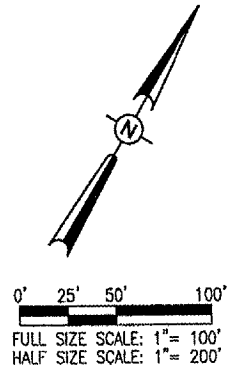

DATE	REVISION	BY

HA PROJECT NO. 802-041XXD
 DRAWING NO. 181SWP.DWG
 SCALE: 1" = 100'
 DATE: 04/15/05

HANSON
 Engineers, Architects, Planners
 526 South Sixth Street
 Springfield, Illinois 62703-2886
 Offices Nationwide

DECATUR, ILLINOIS
 A.I.P. PROJ.: 3-17-0033-28
 I.L. PROJ.: DEC-3414

LAYOUT	WJM	DPE	WJM	04/15/05

HANSON
 Engineers, Architects, Planners
 526 South Sixth Street
 Springfield, Illinois 62703-2886
 Offices Nationwide

TAXIWAY G WIDENING
 PHASE II
 PROPOSED GRADING, SEEDING
 LIMITS, & EROSION CONTROL
 STA. 367+85.57 TO 403+57.30

JUN 10, 2005 9:41 AM CCC
 I:\AIRPORTS\DECATUR\802-041XXD\AIRPORT SHEETS\CONTRACT-1\18-181SWP.DWG - STA. 367+85.57 TO 403+57.30