

2" ACCESS HOLES IN


REAR OF CABINET

NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.


- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 4"X4" SQUARE CORNER HINGES TO BE WELDED ON.
- 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 7 1/4 " HASPS TO BE WELDED ON.

- FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.

LOCKABLE COMPUTER CABINET

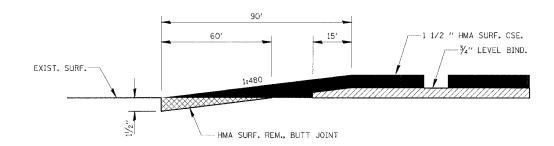

HOT MIX ASPHALT BUTT JOINT DETAIL

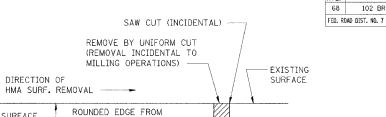

| F.A.P. | SECTION | COUNTY | TOTAL | SHEET |

CONTRACT NO. 66666


NOTE: WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE, THEN A SAW CUT SHALL BE USED TO MANUFACTURE A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL. THE ENGINEER SHALL BE THE SOLE JUDGE CONCERNING THE USE OF THIS DETAIL

MILLING OPERATIONS


HMA SURFACE

REMOVAL (COLD MILLING)


HOT MIX ASPHALT DETAIL AT BUTT JOINTS

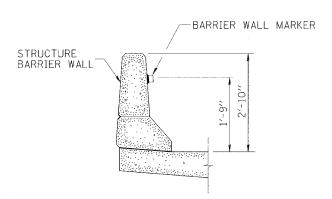

BARRIER WALL MARKER

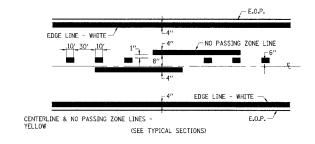

PAVEMENT MARKING

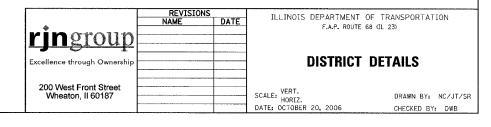

206602 Bis+Da+ Older

-