


## General notes:

- 1. Coldmilling shall consist of two processes: Cutting with carbide teeth mounted on a rotating drum, and planing with a moldboard mounted immediately behind the cutting drum.
- 2. Other similar patterns will be acceptable if they consist of a smooth, flat, planed surface interspersed with a pattern of discontinuous longitudinal striations.

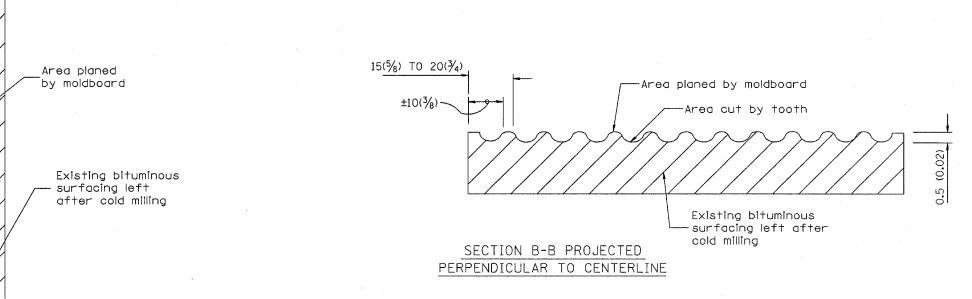

All dimensions are in millimeters (inches) unless otherwise noted.

ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT CADD STANDARD

1- 1-97 RENUM. C-104.01, NEW REVISION BOX 4-20-98 REMOVED MILLING DETAIL FROM STD. 9-08-98 CORRECT NOTE LEADER PLACEMENT

BITUMINOUS SURFACE REMOVAL (COLD MILLING)

CADD STD NO. 440001-D4

SCALE: NOT DRAWN TO SCALE DATE 7/18/2006

44<del>0001-D4</del>

DRAWN BY CADD

SECTION A-A

±0.5(0.02)

Area cut by\_

350(14) R min.-

tooth

57(2.3) ±0.5(0.02)