

50mm ACCESS HOLES IN

REAR OF CABINET

0


NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.

- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (50mm DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 100mmX100mm SQUARE CORNER HINGES TO BE WELDED ON.
- 9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 180mm HASPS TO BE WELDED ON.

FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.

LOCKABLE COMPUTER CABINET

670-1

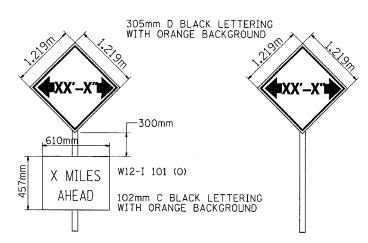


TO BE POST MOUNTED AS SHOWN ELSEWHERE IN THE PLANS.

THE CONTRACTOR SHALL NOTIFY DISTRICT 3 BUREAU OF OPERATIONS 14 CALENDAR DAYS PRIOR TO INSTALLING ANY TRAFFIC CONTROL DEVICES THAT WILL RESTRICT THE PAVEMENT WIDTH.

WIDTH RESTRICTION SIGNING DETAILS

702-5

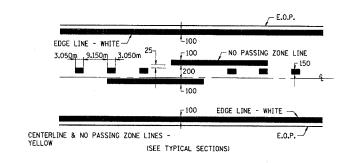

PAVEMENT MARKING

780-8

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

REVISIONS			
NAME	DATE	ILLINOIS DEPARTMENT	OF TRANSPORTATION
		CONSTRUCTION DETAILS	
			7.12
			DRAWN BY
		DATE	CHECKED BY

OCT. 1996 [DETAILS] 200299,DGN 251-1, 251-2, 251-3, 251-4