



Plate A shall be placed between rail element and block-out at non-splice mounting points only when steel block-outs are used.


## PLATE A



STEEL BLOCK-OUT DETAIL

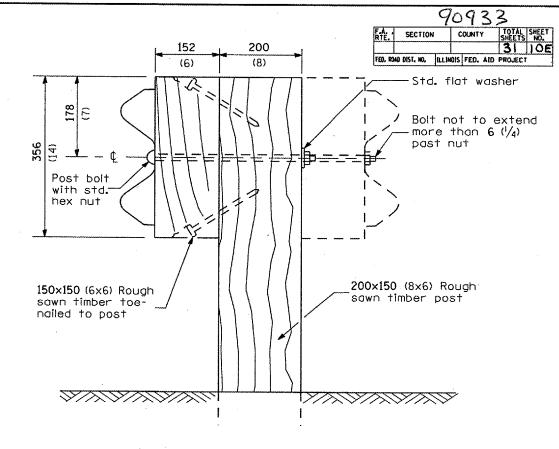

WOOD POST CONSTRUCTION

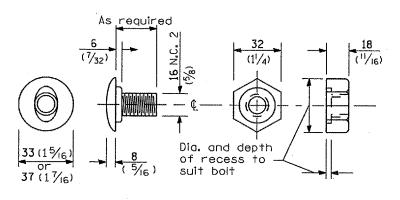

POST OR SPLICE BOLT & NUT

REMOVE AND REERECT STEEL PLATE BEAM GUARDRAIL

(Sheet 2 of 4)

ADDED 1/4/07

**DETAIL**