

**250** (10)

## CLASS SI CONCRETE SHALL BE USED THROUGHOUT.

CLASS SI CONCRETE SHALL BE USED THROUGHOUT.

ANCHOR PINS SHALL BE 20(3/4) DIAMETER, 900 (36) LONG.


THE COST OF THE MATERIAL, LABOR AND EQUIPMENT NECESSARY TO INSTALL THE PARKING BLOCKS WITH ANCHOR PINS SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE PER EACH FOR PARKING BLOCKS.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

## **PARKING BLOCKS**

\* OR AS DIRECTED

BY THE ENGINEER.

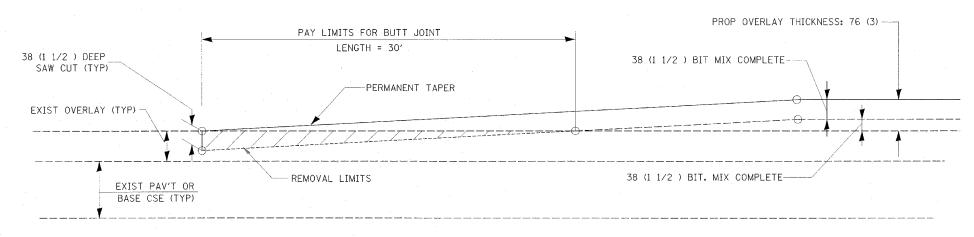

## GENERAL NOTES

- 1. THE WORK SHALL BE DONE IN ACCORDANCE WITH ARTICLE 406.18
- 2. THE SAW CUT JOINTS SHALL BE PRIMED JUST PRIOR TO THE PLACING OF BITUMINOUS MATERIAL. THE WORK WILL BE IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF ARTICLE 406.06.

**BUTT JOINT DETAIL** 

ILLINOIS DEPARTMENT OF TRANSPORTATION

CONSTRUCTION
DETAILS

NAME DATE

SCALE; VERT.
HORIZ.
DATE

CHECKED BY RJA

PLOT DATE = \$DATE\$
FILE NAME = \$FILEL\$
PLOT SCALE = \$SCALE\$
REFERENCE = \$REF\$