



TYPICAL PAVEMENT MARKING
(STA. 373+85 TO STA. 507+00)

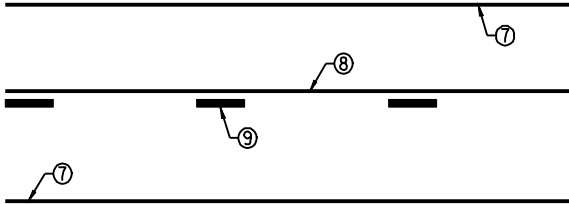

TYPICAL PAVEMENT MARKING - NO PASS ZONE
(SEE SCHEDULE FOR LOCATIONS)

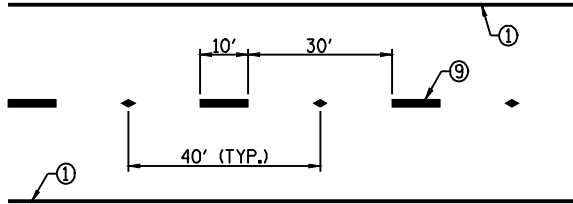

TYPICAL PAVEMENT MARKING
(STA. 507+00 TO STA. 34+04)

SCHEDULE
PAVEMENT MARKING

LOCATION	PREFORMED PLASTIC PAVEMENT MARKING, TY B-INLAID			THERMOPLASTIC PAVEMENT MARKING					URETHANE PAVEMENT MARKING		TEMPORARY PAVEMENT MARKING				SHORT-TERM PVMT. MRK. LINE	WORK ZONE PVMT. MRK. REMOVAL	PAVEMENT MARKING REMOVAL
	SKIP-DASH (10'/30') YELLOW 5"	SOLID WHITE 24"	LETTERS & SYMBOLS	SOLID WHITE 5"	SOLID YELLOW 5"	SKIP-DASH (10'/30') YELLOW 5"	SOLID YELLOW 8"	SOLID WHITE 24"	SOLID WHITE 5"	SOLID YELLOW 5"	LINE 5"	LINE 8"	LINE 24"	LETTERS & SYMBOLS			
	FOOT	FOOT	SQ. FT.	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	SQ. FT.	FOOT	SQ. FT.	SQ. FT.
STA. 352+50 TO STA. 354+28			31		380	100					480			31		200	
STA. 354+28 TO STA. 373+85	20		250	3784	4190	720	78	18			8714	78	18	250	392	4132	
STA. 373+85 TO STA. 507+00 EDGE LT. & RT.									26623		26623					11093	
STA. 373+85 TO STA. 507+00 C	3330										3330				3416	2811	
STA. 507+00 TO STA. 34+04 EDGE LT. & RT.				7555							7555					3148	
STA. 507+00 TO STA. 34+04 C	950										950					396	
STA. 385+67 TO STA. 394+50 NPZ SB										883	883					368	
STA. 390+96 RT.		11											11			22	
STA. 391+21 RT. RR XING			61.2											61.2		61	
STA. 391+46 RT.		11											11			22	
STA. 394+23 RT. STOP BAR		11											11			22	
STA. 394+61 TO STA. 404+00 NPZ NB										939	939					391	
STA. 394+93 LT. STOP BAR		11											11			22	
STA. 397+57 LT.		11											11			22	
STA. 397+82 LT. RR XING			61.2											61.2		61	
STA. 398+07 LT.		11											11			22	
STA. 419+39 TO STA. 436+00 NPZ NB/SB										3322	3322					1384	
STA. 436+00 TO STA. 447+19 NPZ NB										1119	1119					466	
STA. 460+46 TO STA. 468+56 NPZ SB										810	810					338	
STA. 471+85 TO STA. 479+46 NPZ NB										761	761					317	
STA. 480+73 TO STA. 489+62 NPZ SB										889	889					370	
STA. 491+60 TO STA. 498+33 NPZ NB										673	673					280	
STAGE CONSTRUCTION STA. 443+65 TO STA. 456+85											5280					2200	797
SUB-TOTAL	4300	66	404	11339	4570	820	78	18	26623	9396	62328	78	84	404	3808	28181	797
TOTAL	4300	66	404		16729		78	18		36019	62328	78	84	404	3808	28181	797

NOTE: SHORT-TERM PAVEMENT MARKING QUANTITIES ARE FOR TWO APPLICATIONS.
• 10% OF TOTAL LENGTH FOR SHORT-TERM PAVEMENT MARKING

PAVEMENT MARKING LEGEND		
① THERMOPLASTIC PAVEMENT MARKING - LINE 5" (SOLID WHITE)	⑥ PREFORMED PLASTIC PAVEMENT MARKING - LETTERS & SYMBOLS (WHITE)	RAISED REFLECTIVE PAVEMENT MARKER LEGEND ◀ ONE-WAY AMBER MARKER ◄ ONE-WAY CRYSTAL/OPAQUE MARKER ◆ TWO-WAY AMBER MARKER
② THERMOPLASTIC PAVEMENT MARKING - LINE 5" (SOLID YELLOW)	⑦ URETHANE PAVEMENT MARKING - LINE 5" (SOLID WHITE)	
③ THERMOPLASTIC PAVEMENT MARKING - LINE 5" (10' DASH, 30' SKIP, YELLOW)	⑧ URETHANE PAVEMENT MARKING - LINE 5" (SOLID YELLOW)	
④ THERMOPLASTIC PAVEMENT MARKING - LINE 8" (SOLID YELLOW)	⑨ PREFORMED PLASTIC PAVEMENT MARKING - LINE 5" (10' DASH, 30' SKIP, YELLOW)	
⑤ THERMOPLASTIC PAVEMENT MARKING - LINE 24" (SOLID WHITE)	⑩ PREFORMED PLASTIC PAVEMENT MARKING - LINE 24" (SOLID WHITE)	