


- NOTE:

  1.) FOR BIKE LANE SYMBOLS ONLY,
  USE PRE-FORMED THERMOPLASTIC WITH A MINIMUM THICKNESS OF 90 MILS, MINIMUM SKID RESISTANCE VALUE OF 60 BPN, & A MINIMUM INDEX OF REFRACTION OF 1.50.
- 2.) THE RESIDENT ENGINEER SHALL CONTACT MR. BEN GOMBERG AT 312-744-8093 AT LEAST ONE CALENDAR WEEK PRIOR TO INSTALLING BIKE LANE SYMBOLS.

TYPICAL BIKE LANE SYMBOLS
DRAWING #28

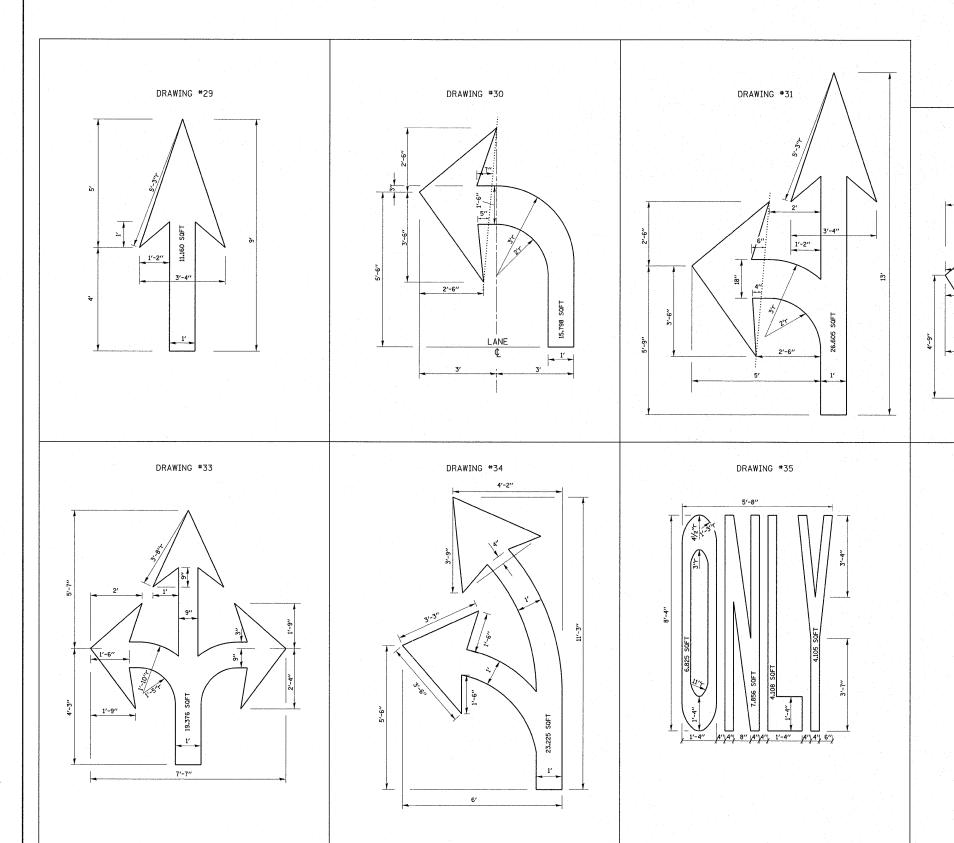

DRAWING #32

ALL MARKINGS SHALL BE SOLID WHITE UNLESS OTHERWISE NOTED IN THE

PLANS

7'-7"

	· · · · · · · · · · · · · · · · · · ·											
FILE NAME =	USER NAME = gorengautab	DESIGNED -	REVISED -T. RAMMACHER 12-07-00			CITY OF CUICAGO		F.A.I.	SECTION	COUNTY	TOTAL SI	ÉET
c:\pw_work\pwidot\gorengautab\d0281223\\162711-sht-plan.dgn		DRAWN -	REVISED - STATE OF ILLINOIS	· .	CITY OF CHICAGO			2011-070-I	СООК	27	13 NU.	
	PLOT SCALE = 50.0000 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	TYPICAL PAVEMENT MARKINGS			307 34	TC-24	CONTRAC	T NO SOP	89
	PLOT DATE = 11/3/2011	DATE -	REVISED -		SCALE: NONE	SHEET NO. 2 OF 2 SHEETS STA.	TO STA.	FED. ROAD D		AID PROJECT		