


- NOTE:

 1.) FOR BIKE LANE SYMBOLS ONLY,

 USE PRE-FORMED THERMOPLASTIC WITH A MINIMUM THICKNESS OF 90 MILS, MINIMUM SKID RESISTANCE VALUE OF 60 BPN, & A MINIMUM INDEX OF REFRACTION OF 1.50.
- 2.) THE RESIDENT ENGINEER SHALL CONTACT MR. BEN GOMBERG AT 312-744-8093 AT LEAST ONE CALENDAR WEEK PRIOR TO INSTALLING BIKE LANE SYMBOLS.

TYPICAL BIKE LANE SYMBOLS
DRAWING #28

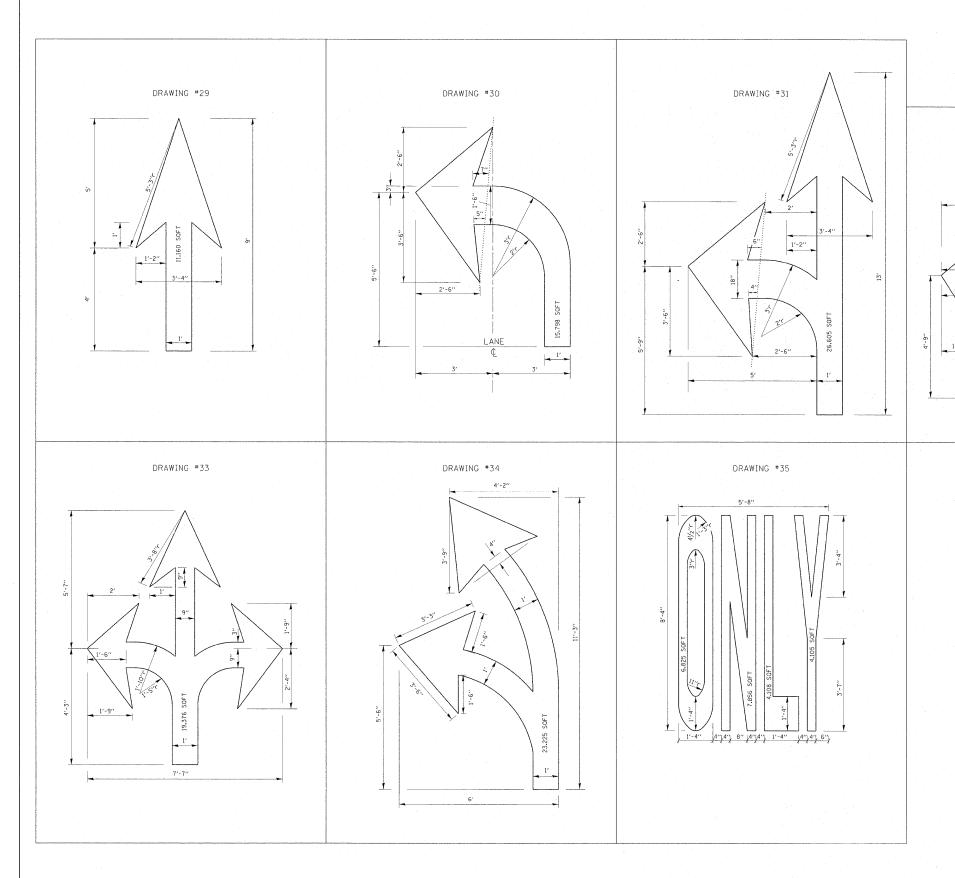

ALL MARKINGS SHALL BE SOLID WHITE UNLESS OTHERWISE NOTED IN THE PLANS

DRAWING #32

		i	
FILE NAME =	USER NAME = steedpa	DESIGNED -	REVISED -T. RAMMACHER 12-07-00
c:\pw_work\pwidot\steedpo\d0145963\DistS	tdidgn	DRAWN -	REVISED -
	PLOT SCALE = 50.0000 '/ in.	CHECKED -	REVISED -
	PLOT DATE = 10/19/2011	DATE -	REVISED -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

İ		CITY OF CHICAGO				
		TYPICAL PAVEMENT MARKINGS				
	SCALE: NONE	SHEET NO. 2 OF 2 SHEETS STA.	TO STA.			

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
307	2011-076-RS	соок	34	21		
	TC-24	CONTRACT	NO. 6	0R02		
FED. ROAD DIST, NO. 1 ILLINOIS FED. AID PROJECT						